

Damper Actuators



Technical Databook

Version 6.2



Damper Actuators			
Coding Comparison Table for Damper Actuators	4	Fast Running Damper Actuator, 4Nm	
Damper Actuator Standard Type Naming	5	LMQ24A	40
Product Overview	6	LMQ24A-SR	41
General Damper Actuator, 2Nm		Fast Running Damper Actuator, 8Nm	
CM24-..	9	NMQ24A	42
CM24-SR-R	10	NMQ24A-SR	43
CM24-T-..	11	NMD230A	45
CM230-..	12	Fast Running Damper Actuator, 16Nm	
General Damper Actuator, 5Nm		SMQ24A	46
LM24A	13	SMQ24A-SR	47
LM24A-F	14	SMD230A	49
LM24A-S	15	Mechanical Fail-Safe Damper Actuator, 2.5Nm	
LM24A-SR	16	TF24	50
LM24A-TP	17	TF24-S	51
LM230A	18	TF24-3	52
LM230A-F	19	TF24-SR	53
LM230A-S	20	TF230	54
LM230ASR	21	TF230-S	55
LM230A-TP	22	Mechanical Fail-Safe Damper Actuator, 4Nm	
General Damper Actuator, 10Nm		LF24(-S)	56
NM24A	23	LF24-3	57
NM24A-S	24	LF24-SR	58
NM24A-SR	25	LF230(-S)	59
NM24A-TP	26	Mechanical Fail-Safe Damper Actuator, 10Nm	
NM230A	27	NFA	60
NM230A-S	28	NFA-S2	61
NM230ASR	29	NF24A-SR	62
NM230A-TP	30	Mechanical Fail-Safe Damper Actuator, 20Nm	
General Damper Actuator, 20Nm		SFA	63
SM24A	31	SFA-S2	64
SM24A-S	32	SF24A-SR	65
SM24A-SR	33	Mechanical Fail-Safe Damper Actuator, 30Nm	
SM230A	34	EF24A-S2	66
SM230A-S	35	EF24A-SR	67
SM230ASR	36	EF230A-S2	68
General Damper Actuator, 40Nm		Electronic Fail-Safe Damper Actuator, 40Nm	
GM24A	37	GK24A-1	69
GM24A-SR	38	GK24A-MF	70
GM230A	39	Mounting Instructions	72
		Wiring Diagrams	86
		Auxiliary Switch Adjustment	92
		Electrical Accessories	93
		Mechanical Accessories	94

Note:

Using Belimo Damper Actuators:

- The actuators listed in this catalogue are intended for the operation of air dampers in HVAC systems.
- The damper actuator is not allowed to be used outside the specified field of application, especially in aircraft.
- The enclosure of the actuator equipment may only be opened by the manufacturer. It contains no components which the user can replace or repair.
- The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Torque requirements:

- When calculating the torque required to operate dampers, it is essential to take into account all the data supplied by the damper manufacturer concerning cross sectional area, design, mounting and air flow condition.

General Damper Actuators					
Series	Old Code	New Code	Series	Old Code	New Code
CM..	CMU24	CM24-L / CM24-R	NM..	NMU24-S	NM24A-S
	CMU24-SR-R	CM24-SR-R		NMU24-SR	NM24A-SR
	CMU24-T	CM24-T-L / CM24-T-R		NMU24-T	NM24A-TP
	CMU230	CM230-L / CM230-R		NMU230	NM230A
LM..	LMU24	LM24A	SM..	NMU230-S	NM230A-S
	LMU24-F	LM24A-F		NMU230SR	NM230ASR
	LMU24-S	LM24A-S		NMU230-T	NM230A-TP
	LMU24-SR	LM24A-SR		SMU24	SM24A
	LMU24-T	LM24A-TP	GM..	SMU24-S	SM24A-S
	LMU230	LM230A		SMU24-SR	SM24A-SR
	LMU230-F	LM230A-F		SMU230	SM230A
	LMU230-S	LM230A-S		SMU230-S	SM230A-S
	LMU230SR	LM230ASR		SMU230SR	SM230ASR
	LMU230-T	LM230A-TP		GMU24	GM24A
	LMU72	LM72A		GMU24-SR	GM24A-SR
NM..	NMU24	NM24A		GMU230	GM230A

Fast Running Damper Actuators					
Series	Old Code	New Code	Series	Old Code	New Code
LMQ..	LMQU24	LMQ24A	SMQ..	SMQU24	SMQ24A
	LMQU24-SR	LMQ24A-SR		SMQU24-SR	SMQ24A-SR
NMQ..	NMQU24	NMQ24A	SMD..	SMDU230	SMD230A
	NMQU24-SR	NMQ24A-SR			

Mechanical Fail-Safe Damper Actuators					
Series	Old Code	New Code	Series	Old Code	New Code
NFA..	NFU	NFA	EF..	EFU24-S2	EF24A-S2
	NFU-S2	NFA-S2		EFU24-SR	EF24A-SR
	NFU24-SR	NF24A-SR		EFU230-S2	EF230A-S2
SFA..	SFU	SFA			
	SFU-S2	SFA-S2			
	SFU24-SR	SF24A-SR			

Electronic Fail-Safe Damper Actuators					
Series	Old Code	New Code	Series	Old Code	New Code
GK..	GKU24	GK24A-1	GK..	GKU24-MF	GK24A-MF

Product naming					
	e.g.	L	M	24	A -SR
Torque					
<u>General Damper Actuator</u>					
40Nm	G				
20Nm	S				
10Nm	N				
5Nm	L				
2Nm	C				
<u>Mechanical Fail-Safe Damper Actuator</u>					
30Nm	E				
20Nm	S				
10Nm	N				
4Nm	L				
2.5Nm	T				
<u>Electronic Fail-Safe Damper Actuator</u>					
40Nm	G				
General Damper Actuator	M				
Mechanical Fail-Safe Damper Actuator	F				
Electronic Fail-Safe Damper Actuator	K				
Power supply					
AC/DC 24V	24				
AC 100...240V (AC 230V for Mechanical Fail-Safe Damper Actuator)	230				
Globe Harmonisation Damper Actuator for Asia Pacific					
Function					
<u>General Damper Actuator</u>					
Open/Close, 3-point	Blank				
Modulating DC (0)2...10V	-SR				
Auxiliary switch	-S				
Form fit	-F				
Terminal connection	-T, -TP				
<u>Mechanical Fail-Safe Damper Actuator</u>					
Open/Close	Blank				
Modulating DC (0)2...10V	-SR				
3-point	-3				
Auxiliary switch	-S, -S2				
<u>Electronic Fail-Safe Damper Actuator</u>					
3-point	-MF				

For customising types of damper actuators, please contact your nearest Belimo sales representative.

	2Nm	5Nm	10Nm	20Nm	40Nm
General Damper Actuator	CM..	LM..	NM..	SM..	GM..
Open/Close, 3-point AC/DC 24V 50/60Hz	CM24-.. CM24-T-..	LM24A (-F / -TP)	NM24A (-TP)	SM24A	GM24A*
Auxiliary switch built-in 1 SPDT		LM24A-S	NM24A-S	SM24A-S	
AC 100...240V 50/60Hz	CM230-..	LM230A (-F / -TP)	NM230A	SM230A	GM230A*
Auxiliary switch built-in 1 SPDT			NM230A-S	SM230A-S	
Modulating Control signal DC (0)2...10V, feedback DC 2...10V					
AC/DC 24V 50/60Hz	CM24-SR-R**	LM24A-SR	NM24A-SR	SM24A-SR	GM24A-SR
AC 100...240V 50/60Hz		LM230ASR	NM230ASR	SM230ASR	
Running time	75s	150s			
Shaft diameter 	6...12.7mm	6...20mm	8...26.7mm	10...20mm	12...25.2mm
Sound power level	Max. 35dB(A)			Max. 45dB(A)	
Manual override	Gear disengaging by magnet	Gear disengaging by push button			
Electrical connection	Cable 1m (-T: Terminal)				
Direction of rotation	Selected by switch				
Angle of rotation	Max. 95°, can be limited at both ends with mechanical adjustable end stops				
Position indicator	Mechanical, plug-on				
Degree of protection	IP54 (-T: IP20)				
EMC	CE according to 2004/108/EC				
LVD***	CE according to 2006/95/EC				
Ambient temperature	-30...+50°C				
Non-operation temperature	-40...+80°C				
Humidity	5...95% RH, non-condensing				

* Only Open/Close, no 3-point.

** CM24-SR-R: Control signal (0)2V at the right side, and the left side is available on request.

*** For 230V models.

	4Nm	8Nm	16Nm		
Fast Running Damper Actuator	LMQ..	NMQ..	NMD..	SMQ..	SMD..
Open/Close					
AC 24V 50/60Hz, DC 24V	LMQ24A	NMQ24A		SMQ24A	
AC 100...240V 50/60Hz			NMD230A		SMD230A
Modulating					
Control signal DC (0)2...10V, feedback DC 2...10V					
AC 24V 50/60Hz, DC 24V	LMQ24A-SR	NMQ24A-SR		SMQ24A-SR	
Running time	2.5s	4s	20s	7s	20s
Shaft diameter 	8...26.7mm			12...25.2mm	10...20mm
Sound power level	Max. 52dB(A)		Max. 55dB(A)	Max. 63dB(A)	Max. 55dB(A)
Manual override	Disengaging the gearing latch by means of a push button, self-resetting				
Electrical connection	Cable 1m				
Direction of rotation	Selected by switch				
Angle of rotation	Max. 95°, can be limited at both ends with mechanical adjustable end stops				
Position indicator	Mechanical, plug-on				
Degree of protection	IP54				
EMC	CE according to 2004/108/EC				
LVD*	CE according to 2006/95/EC				
Ambient temperature	-30...+40°C (without restrictions); +40...+50°C (with restrictions)				
Non-operation temperature	-40...+80°C				
Humidity	5...95% RH, non-condensing				

* For 230V models.

	2.5Nm	4Nm
Mechanical Fail-Safe Damper Actuator	TF..	LF..
Open/Close		
AC/DC 24V 50/60Hz	TF24	LF24
Auxiliary switch built-in 1 SPDT	TF24-S	LF24-S
AC 230V 50/60Hz	TF230**	LF230
Auxiliary switch built-in 1 SPDT	TF230-S	LF230-S
3-point		
AC/DC 24V 50/60Hz	TF24-3**	LF24-3
Modulating		
Control signal DC (0)2...10V, feedback DC 2...10V		
AC/DC 24V 50/60Hz	TF24-SR	LF24-SR
Running time -Motor	<75s*	40-75s*
-Spring return	<25s @-20...+50°C / max. 60s @-30°C	<20s @-20...+50°C / max. 60s @-30°C
Shaft diameter 	6...12mm	8...16mm
Sound power level -Motor	Open/Close max. 50dB(A) Modulating and 3-point max. 35dB(A)	Open/Close max. 50dB(A) Modulating and 3-point max. 30dB(A)
-Spring	62dB(A)	
Electrical connection	Cable 1m	
Direction of rotation	Selected by mounting L/R	
Angle of rotation	Max. 95°	
Mechanical end stops	Yes	
Position indicator	Yes	
Degree of protection	IP42	IP54
EMC	CE according to 2004/108/EC	
LVD***	CE according to 2006/95/EC	
Ambient temperature	-30...+50°C	
Non-operation temperature	-40...+80°C	
Humidity	5...95% RH, non-condensing	

* LF24-3 and all -SR types are 150s.

** TF24-3 nominal voltage is AC 24V, TF230 nominal voltage is AC 100...240V.

*** For 230V models.

	10Nm	20Nm	30Nm
Mechanical Fail-Safe Damper Actuator	NFA..	SFA..	EF..
Open/Close			
AC 24...240V / DC 24...125V	NFA	SFA	-
Auxiliary switch built-in 2 SPDT	NFA-S2	SFA-S2	-
AC/DC 24V 50/60Hz			
Auxiliary switch built-in 2 SPDT	-	-	EF24A-S2
AC 230V 50/60Hz			
Auxiliary switch built-in 2 SPDT	-	-	EF230A-S2
Modulating Control signal DC (0)2...10V, feedback DC 2...10V			
AC/DC 24V 50/60Hz	NF24A-SR	SF24A-SR	EF24A-SR
Running time -Motor -Spring return	Open/Close 75s; modulating 150s 20s @ -20 ...+50°C / max. 60s @ -30°C		Open/Close 60s; modulating 150s 20s @ -20 ...+50°C / max. 60s @ -30°C
Shaft diameter  / 	10...25.4mm / 14...25.4mm		12...26.7mm / 12...25.2mm
Sound power level -Motor -Spring return	Open/Close max. 45dB(A) Modulating max. 40dB(A) max. 62dB(A)		Open/Close max. 55dB(A) Modulating max. 45dB(A) max. 71dB(A)
Electrical connection	Cable 1m		
Direction of rotation	Selected by mounting L/R		
Angle of rotation	Max. 95°		
Mechanical end stops	Yes		
Position indicator	Yes		
Degree of protection	IP54		
EMC	CE according to 2004/108/EC		
LVD*	CE according to 2006/95/EC		
Ambient temperature	-30...+50°C		
Non-operation temperature	-40...+80°C		
Humidity	5...95% RH, non-condensing		

* For 230V only.

	40Nm
Electronic Fail-Safe Damper Actuator	GK..
Open/Close	
AC/DC 24V 50/60Hz	GK24A-1
Modulating / 3-point Control signal DC (0)2...10V, feedback DC 2...10V	
AC/DC 24V 50/60Hz	-
Running time -Standard -Power off position	150s 35s @ 0...50°C
Shaft diameter  / 	12...26.7mm / 12...25.2mm
Sound power level -Standard -Power off position	Max. 53dB(A) Max. 61dB(A)
Electrical connection	Cable 1m
Direction of rotation	Selected by mounting L/R
Angle of rotation	Max. 95°
Mechanical end stops	Yes
Position indicator	Yes
Degree of protection	IP54
EMC	CE according to 2004/108/EC
Ambient temperature	-30...+50°C
Non-operation temperature	-40...+80°C
Humidity	5...95% RH, non-condensing

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 2Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point



Type overview


Type	Direction of rotation
CM24-L	counter-clockwise (ccw)
CM24-R	clockwise (cw)

Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC/DC 19.2 ... 28.8V
	Power consumption	In operation 0.5W @ nominal torque At rest 0.2W For wire sizing 1VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 2Nm @ nominal voltage
	Direction of rotation	See «Type overview»
	Manual override	Gear disengagement with magnet
	Angle of rotation	Without limit Endless With limit Fixed 315°↱ or 0...287.5°↱ with mechanical end stops, can be adjusted in 2.5°↱ increments
	Running time	75s / 90°↱
	Sound power level	Max. 35dB(A)
	Position indicator	Mechanical, pluggable (with integrated magnet for gear disengagement)
	Safety	Protection class III Safety extra-low voltage / UL Class 2 Supply
		Degree of protection IP54 in any mounting position NEMA2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1 (EN 60730-1)
	Rated impulse voltage	0.8kV (EN 60730-1)
	Control pollution degree	3 (EN 60730-1)
	Ambient temperature	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
	Dimensions / Weight	Dimensions See «Dimensions»
		Weight Approx. 0.28kg

Dimensions [mm]

Dimensional drawings

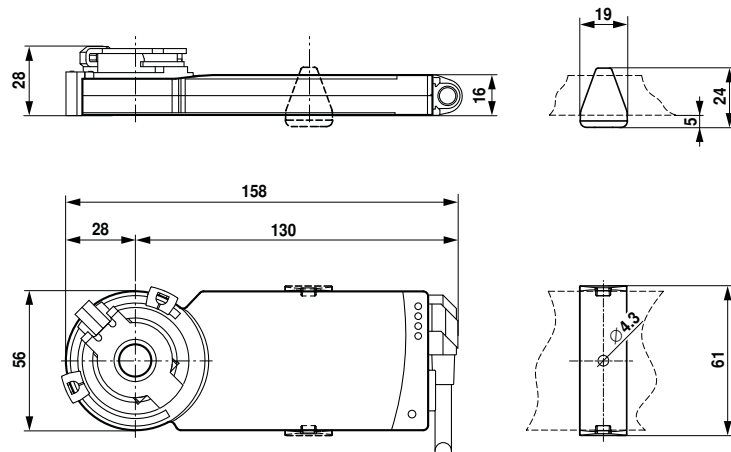

Damper spindle	Length	
	≥32	6...12.7

Modulating damper actuator for adjusting dampers in technical building installations

- Nominal torque 2Nm
- Nominal voltage AC/DC 24V
- Modulating control DC 0...10V
- Position feedback DC 2...10V
- Adaption




Technical data

Electrical data	Nominal voltage	AC/DC 24V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2...28.8V / DC 19.2...28.8V
	Power consumption	In operation 1W At rest 0.5W For wire sizing 1.5VA
Functional data	Connection supply / control	Cable 1m, 4 x 0.75mm ²
	Torque motor	Min. 2Nm
	Positioning signal Y	DC 0...10V
	Positioning signal Y note	Typical input impedance 100kΩ
	Operating range Y	DC 2...10V
	Position feedback U	DC 2...10V
	Position feedback U note	Max. 1mA
	Direction of rotation motor	Y = 0V, right end stop, position 0
	Manual override	Gear disengagement with magnet
	Angle of rotation	Max. 287.5°, can be limited at both ends with adjustable mechanical end stops Max. 3600°, limited by means of mechanical end stops on the application
	Running time motor	75s / 90°
	Angle of rotation adaptation	Manual triggering of the adaption by the use of the magnet at the position intended for this purpose.
	Sound power level motor max.	35dB(A)
	Spindle driver	Universal spindle clamp 6...12.7mm
Safety	Position indication	Mechanical, plug-in (with integrated magnet for gear disengagement)
	Protection class IEC/EN	III Safety extra-low voltage
	Protection class UL	UL Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Principle of operation	Type 1
	Rated impulse voltage supply / control	0.8kV
	Control pollution degree	3
	Ambient temperature	-30...50°C
	Non-operating temperature	-40...80°C
	Ambient humidity	95% r.h., non-condensing
	Maintenance	Maintenance-free
Weight	Weight	Approx. 0.28kg

Dimensions [mm]

Dimensional drawings


Spindle length

	Min. 32
	-

6...12.7

6, 8, 10

6...12.7

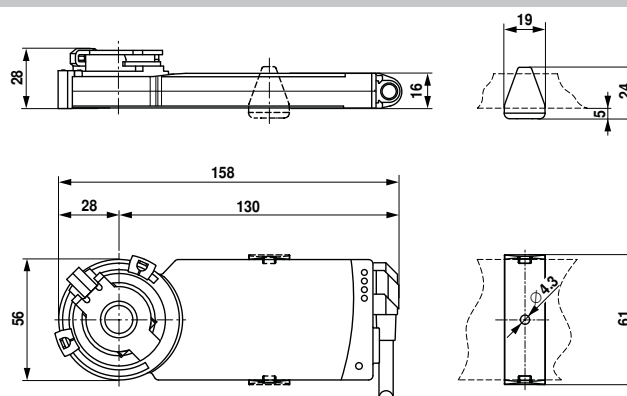

UL marked actuators is optional, please contact your local Sales Representative for details.

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 2Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point V
- Connecting terminals



Type overview


Type	Direction of rotation
CM24-T-L	counter-clockwise (ccw)
CM24-T-R	clockwise (cw)

Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
	Power consumption	In operation 0.5W @ nominal torque At rest 0.2W For wire sizing 1VA
	Connection	Terminals for 3 x 1.5mm ² CU wire or 3 x 1.0mm ² CU litz wires
Functional data	Torque (nominal torque)	Min. 2Nm @ nominal voltage
	Direction of rotation	See «Type overview»
	Manual override	Gear disengagement with magnet
	Angle of rotation	Without limit Endless With limit Fixed 315° or 0...287.5° with mechanical end stops, can be adjusted in 2.5° increments
	Running time	75s / 90°
	Sound power level	Max. 35dB(A)
	Position indicator	Mechanical, pluggable (with integrated magnet for gear disengagement)
	Safety	Protection class III Safety extra-low voltage / UL Class 2 Supply
		Degree of protection IP20 in any mounting position NEMA1, UL Enclosure Type 1
	EMC	CE according to 2004/108/EC
Safety	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1 (EN 60730-1)
	Rated impulse voltage	0.8kV (EN 60730-1)
	Control pollution degree	2 (EN 60730-1)
	Ambient temperature	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
	Dimensions / Weight	Dimensions See «Dimensions»
		Weight Approx. 0.21kg

Dimensions [mm]

Dimensional drawings

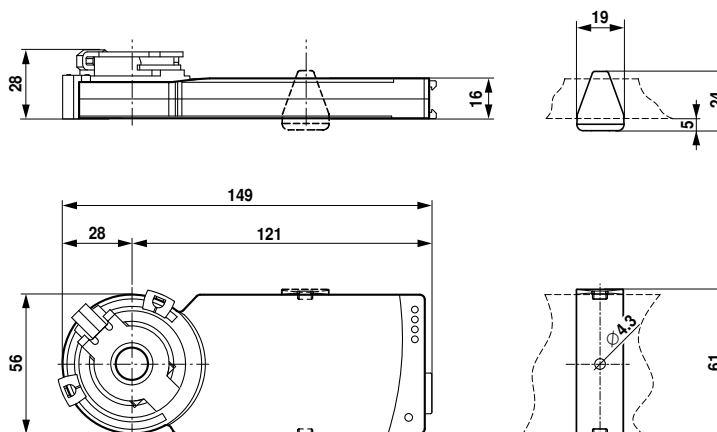

Damper spindle	Length	
	≥32	6...12.7

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 2Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point



Type overview


Type	Direction of rotation
CM230-L	counter-clockwise (ccw)
CM230-R	clockwise (cw)

Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 1.5W @ nominal torque At rest 1W For wire sizing 3VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 2Nm @ nominal voltage
	Direction of rotation	See «Type overview»
	Manual override	Gear disengagement with magnet
	Angle of rotation	Without limit Endless With limit Fixed 315°↯ or 0...287.5°↯ with mechanical end stops, can be adjusted in 2.5°↯ increments
	Running time	75s / 90°↯
	Sound power level	Max. 35dB(A)
	Position indicator	Mechanical, pluggable (with integrated magnet for gear disengagement)
	Safety	Protection class II totally insulated 
	Degree of protection	IP54 in any mounting position NEMA2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
Safety	Low voltage directive	CE according to 2006/95/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1 (EN 60730-1)
	Rated impulse voltage	2.5kV (EN 60730-1)
	Control pollution degree	3 (EN 60730-1)
	Ambient temperature	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
	Dimensions / Weight	Dimensions See «Dimensions» Weight Approx. 0.28kg

Dimensions [mm]

Dimensional drawings

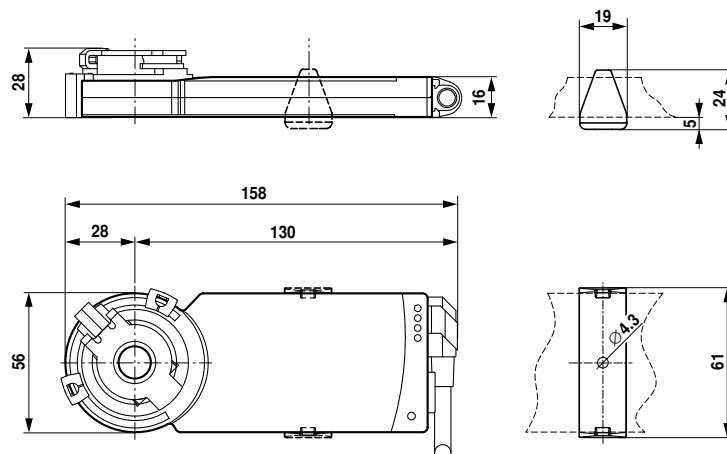

Damper spindle	Length	
	≥32	6...12.7

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
	Power consumption	In operation 1W @ nominal torque At rest 0.2W For wire sizing 1.5VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	III Safety extra-low voltage
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.48kg

Dimensions [mm]

Dimensional drawings

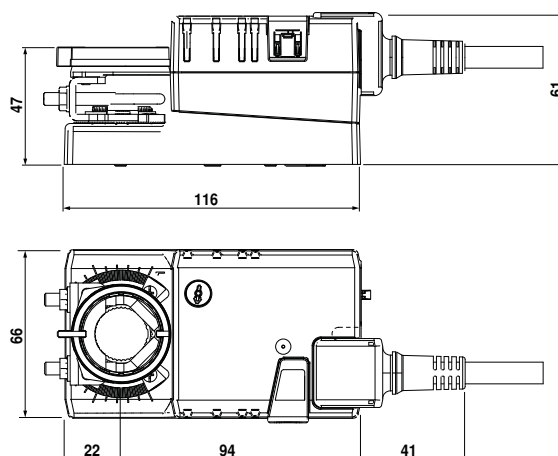

Damper spindle	Length	⌀ I ⬠
	min. 37	6...20

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point
- Damper rotation: Form-fit 8mm




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 1W @ nominal torque At rest 0.2W For wire sizing 1.5VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↔, can be limited at both ends with adjustable mechanical end stops
	Running time	150s / 90°↔
	Sound power level	Max. 35dB(A)
	Damper rotation	Form-fit 8mm
	Position indication	Mechanical, pluggable
Safety	Protection class	III Safety extra-low voltage / UL Class 2 Supply
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
Dimensions / Weight	Mode of operation	Type 1
	Rated impulse voltage	0.8kV
	Control pollution degree	3 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.47kg

Dimensions [mm]

Dimensional drawings

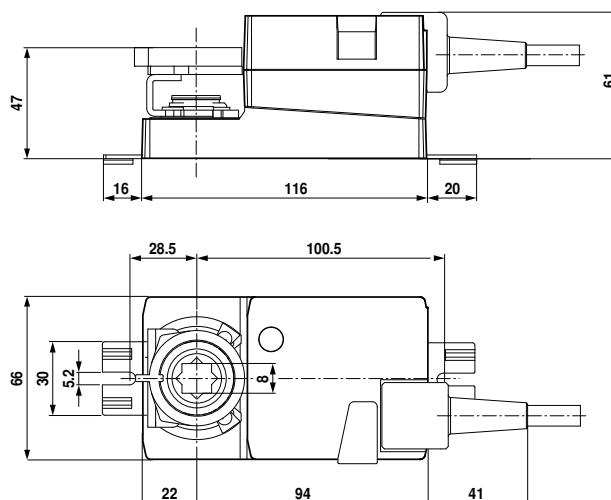

Damper spindle	Length	
	≥20	8

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point
- Integrated auxiliary switch




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
	Power consumption	In operation 1W @ nominal torque At rest 0.2W For wire sizing 1.5VA
	Auxiliary switch	1 x SPDT, 1mA...3 (0.5) A, AC 250V ☐ (0...100% adjustable)
	Connection	Motor Cable 1m, 3 x 0.75mm ² Auxiliary switch Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
Safety	Position indication	Mechanical, pluggable
	Protection class	III Safety extra-low voltage
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
Dimensions / Weight	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.58kg

Dimensions [mm]

Dimensional drawings

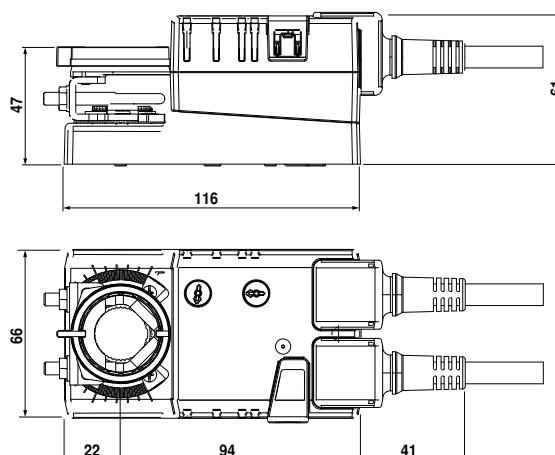

Damper spindle	Length	Ø I ◇
	min. 37	6...20

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC/DC 24V
- Control: modulating DC (0)2...10V, position feedback DC 2...10V




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
	Power consumption	In operation 1W @ nominal torque At rest 0.4W For wire sizing 2VA
	Connection	Cable 1m, 4 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Control	Control signal Y Working range DC (0)2...10V, typical input impedance 100kΩ DC 2...10V
	Position feedback (Measuring voltage)	DC 2...10V, max. 1mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch 0 / 1
	Direction of rotation at Y = 0V	at switch position 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
Safety	Position indication	Mechanical, pluggable
	Protection class	III Safety extra-low voltage
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 0.51kg

Dimensions [mm]

Dimensional drawings

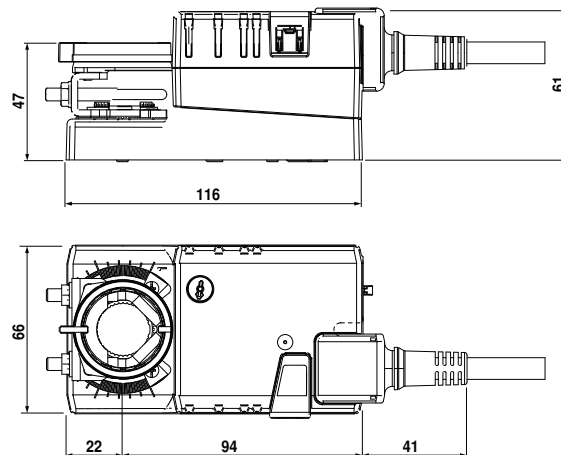

Damper spindle	Length	
	min. 37	6...20

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
	Power consumption	In operation 1W @ nominal torque At rest 0.2W For wire sizing 1.5VA
	Connection	Terminals 4mm ² (Cable Ø 6...8mm, three-core)
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, detentable
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s / 90°↔
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	III Safety extra-low voltage
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Rated impulse voltage	0.8kV (to EN 60730-1)
	Control Pollution Degree	3 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (to EN 60730-1)
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 0.46kg

Dimensions [mm]

Dimensional drawings

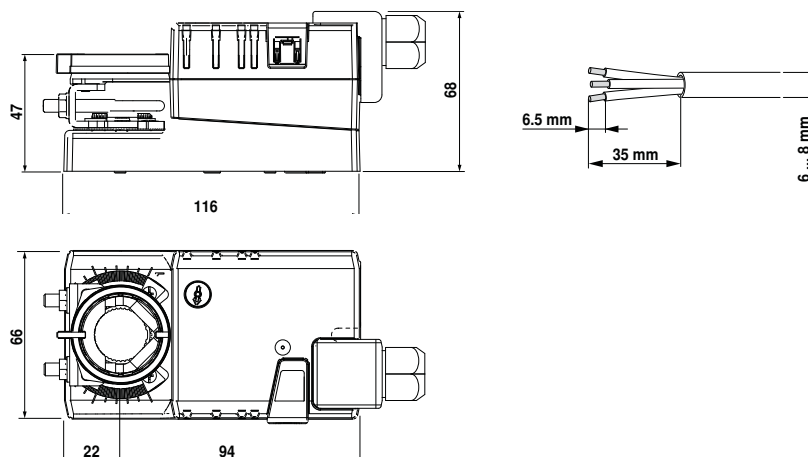

Damper spindle	Length	● I	■ I	◆ I
	>37	6...20	>6	<20

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 1.5W @ nominal torque At rest 0.4W For wire sizing 3.5VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.5kg

Dimensions [mm]

Dimensional drawings

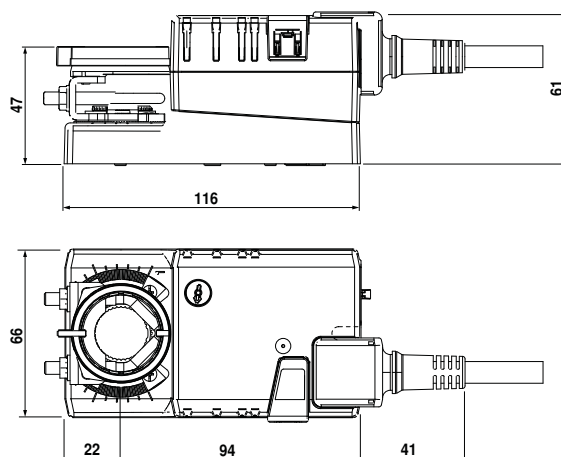

Damper spindle	Length	
	min. 37	6...20

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point
- Damper rotation: Form-fit 8mm




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 1.5W @ nominal torque At rest 0.4W For wire sizing 3.5VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Running time	150s / 90°↺
	Sound power level	Max. 35dB(A)
	Damper rotation	Form-fit 8mm
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108 EC
	Low voltage directive	CE according to 2006/95/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1
	Rated impulse voltage	2.5kV
	Control pollution degree	3 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 0.48kg

Dimensions [mm]

Dimensional drawings

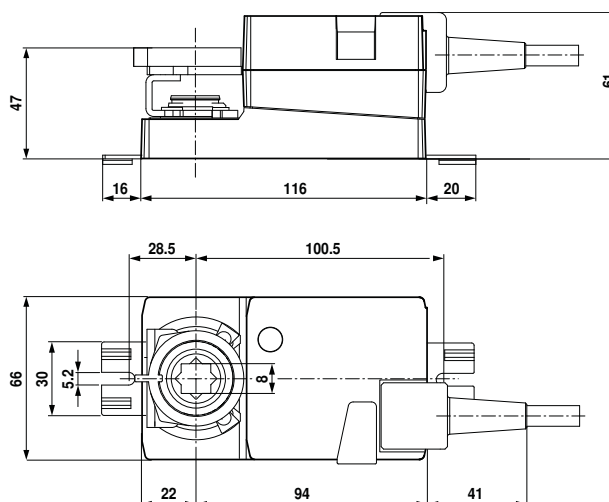

Damper spindle	Length	☐ I
	≥20	8

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point
- Integrated auxiliary switch




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 1.5W @ nominal torque At rest 0.4W For wire sizing 3.5VA
	Auxiliary switch	1 x SPDT, 1mA...3 (0.5) A, AC 250V ☐ (0...100% adjustable)
	Connection Motor	Cable 1m, 3 x 0.75mm ²
	Auxiliary switch	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°<, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.58kg

Dimensions [mm]

Dimensional drawings

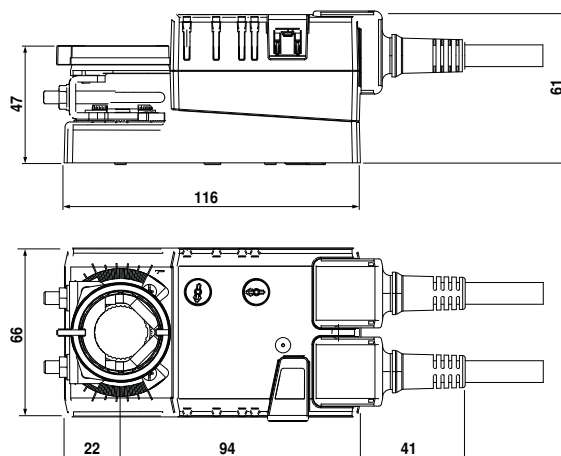

Damper spindle	Length	
	min. 37	6...20

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC 100...240V
- Control: modulating DC 0...10V, position feedback DC 2...10V




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 2W @ nominal torque At rest 1W For wire sizing 4VA
	Connection	Power supply Cable 1m, 2 x 0.75mm ² Signals Cable 1m, 4 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Control	Control signal Y DC 0...10V, typical input impedance 100kΩ Working range DC 2...10V
	Position feedback (Measuring voltage)	DC 2...10V, max. 1mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch 0 / 1
	Direction of rotation at Y = 0V	at switch position 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
Safety	Position indication	Mechanical, pluggable
	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 0.62kg

Dimensions [mm]

Dimensional drawings

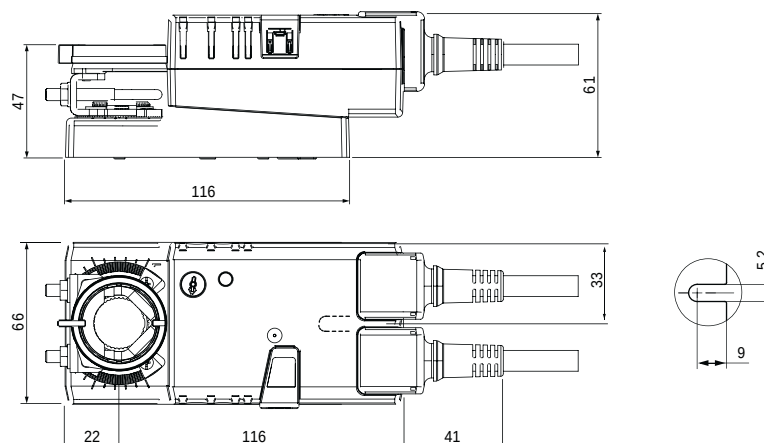

Damper spindle	Length	
	min. 37	6...20

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 5Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 1.5W @ nominal torque At rest 0.4W For wire sizing 3.5VA
	Connection	Terminals 4mm ² (Cable Ø 6...8mm, three-core)
Functional data	Torque (nominal torque)	Min. 5Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, detentable
	Angle of rotation	Max. 95°↺, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s / 90°↺
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Rated impulse voltage	4kV (to EN 60730-1)
	Control Pollution Degree	3 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (to EN 60730-1)
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.47kg

Dimensions [mm]

Dimensional drawings

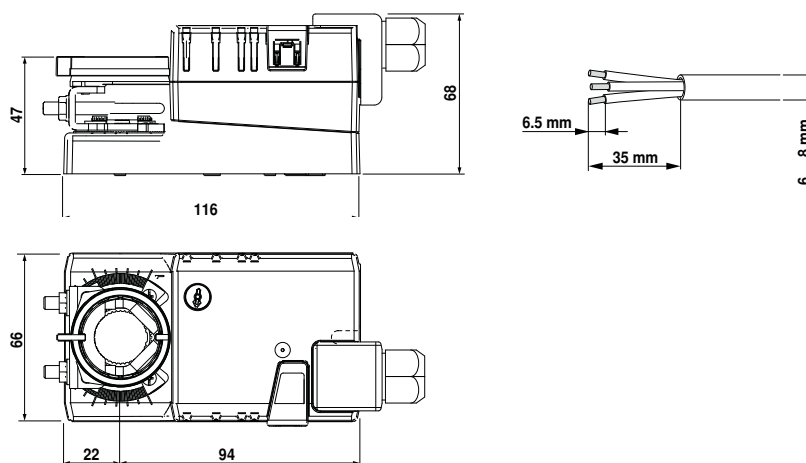

Damper spindle	Length			
	>37	6...20	>6	<20

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 10Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
	Power consumption	In operation 1.5W @ nominal torque At rest 0.2W For wire sizing 3.5VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 10Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	III Safety extra-low voltage
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.75kg

Dimensions [mm]

Dimensional drawings

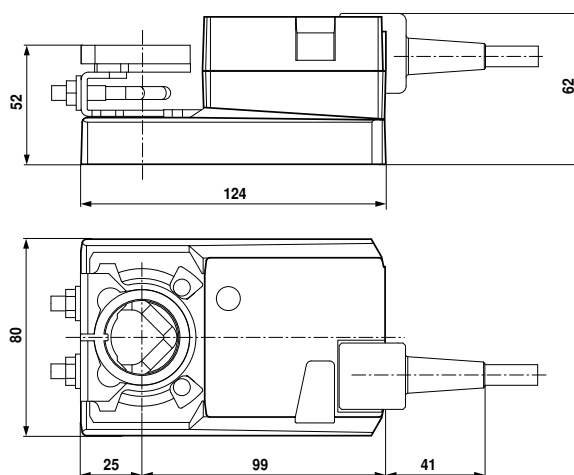

Damper spindle	Length	⌀	□	◇
	≥40	8...26.7	≥8	≤26.7
*	≥20	8...20	≥8	≤20

* Option (Accessory K-NA)

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 10Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point
- Integrated auxiliary switch




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
Power consumption	In operation	1.5W @ nominal torque
	At rest	0.2W
	For wire sizing	3.5VA
Auxiliary switch		1 x SPDT, 1mA...3 (0.5) A, AC 250V ☐
		(0...100% adjustable)
Connection	Motor	Cable 1m, 3 x 0.75mm ²
	Auxiliary switch	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 10Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	III Safety extra-low voltage
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 0.84kg

Dimensions [mm]

Dimensional drawings

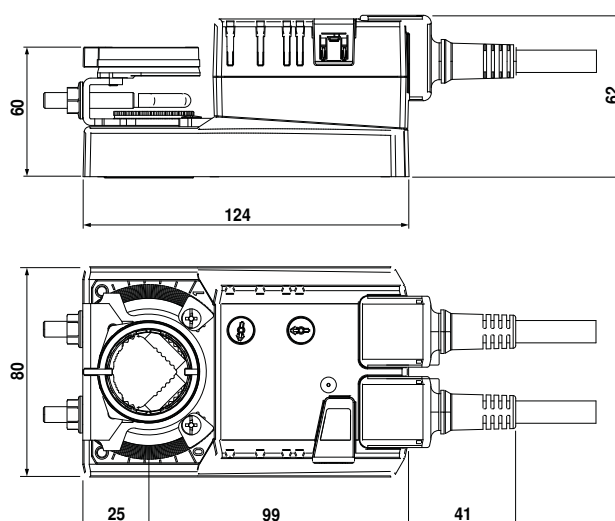

Damper spindle	Length	⌀ I ⌀
Clamp on top	min. 40	8...26.7
Clamp on bottom *	min. 20	8...20

* Option (Accessory K-NA)

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 10Nm
- Nominal voltage AC/DC 24V
- Control: modulating DC (0)2...10V, position feedback DC 2...10V




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
	Power consumption	In operation 2W @ nominal torque At rest 0.4W For wire sizing 4VA
	Connection	Cable 1m, 4 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 10Nm @ nominal voltage
	Control	Control signal Y Working range DC (0)2...10V, typical input impedance 100kΩ DC 2...10V
	Position feedback (Measuring voltage)	DC 2...10V, max. 1mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch 0 / 1
	Direction of rotation at Y = 0V	at switch position 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
Safety	Position indication	Mechanical, pluggable
	Protection class	III Safety extra-low voltage
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 0.77kg

Dimensions [mm]

Dimensional drawings

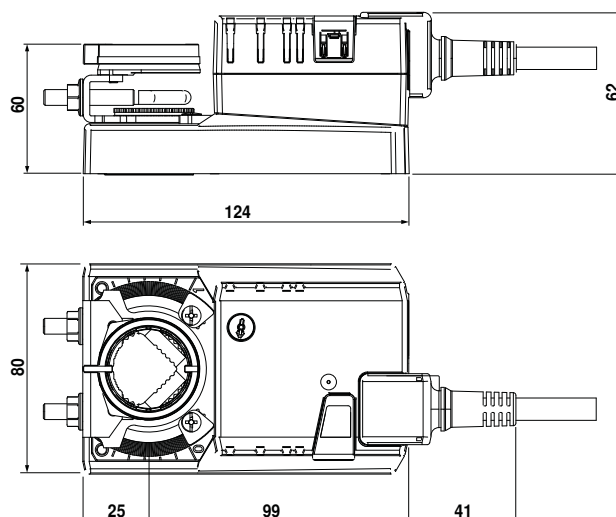

Damper spindle	Length	⌀
Clamp on top	min. 40	8...26.7
Clamp on bottom *	min. 20	8...20

* Option (Accessory K-NA)

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 10Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
	Power consumption	In operation 1.5W @ nominal torque At rest 0.2W
		For wire sizing 4VA
Functional data	Connection	Terminals 4mm ² (Cable Ø 6...8mm, three-core)
	Torque (nominal torque)	Min. 10Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, detentable
	Angle of rotation	Max. 95°↺, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s / 90°↺
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	III Safety extra-low voltage
	Degree of protection	IP54 in any mounting position
	EMC	CE according 2004/108/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Rated impulse voltage	0.8kV (to EN 60730-1)
	Control Pollution Degree	3 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (to EN 60730-1)
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.75kg

Dimensions [mm]

Dimensional drawings

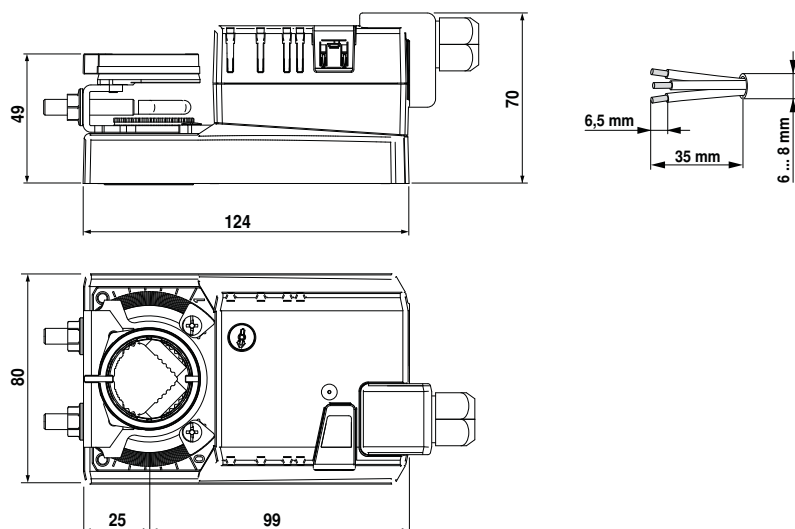

Damper spindle	Length	●	■	◆
Clamp on top	>40	8...26.7	>8	<26.7
Clamp on bottom *	>20	8...20	>8	<20

* Option (Accessory K-NA)

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 10Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 2.5W @ nominal torque At rest 0.6W For wire sizing 5.5VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 10Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.77kg

Dimensions [mm]

Dimensional drawings

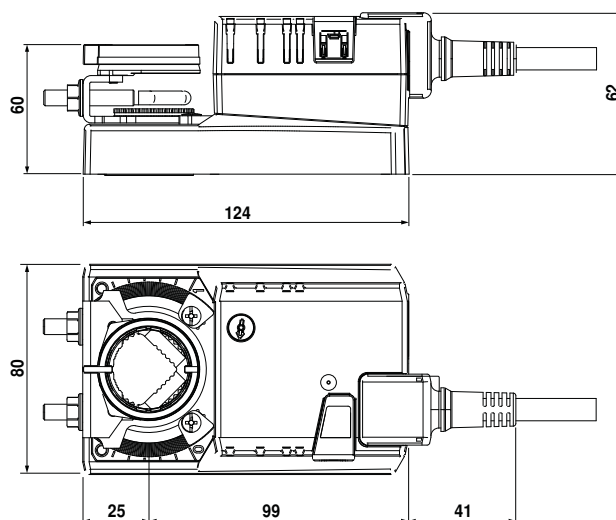

Damper spindle	Length			
	≥40	8...26.7	≥8	≤26.7
*	≥20	8...20	≥8	≤20

* Option (Accessory K-NA)

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 10Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point
- Integrated auxiliary switch




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 2.5W @ nominal torque At rest 0.6W For wire sizing 5.5VA
	Auxiliary switch	1 x SPDT, 1mA...3 (0.5) A, AC 250V ☐ (0...100% adjustable)
Functional data	Connection	Motor Cable 1m, 3 x 0.75mm ² Auxiliary switch Cable 1m, 3 x 0.75mm ²
	Torque (nominal torque)	Min. 10Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
Safety	Angle of rotation	Max. 95°<, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Dimensions / Weight	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.85kg

Dimensions [mm]

Dimensional drawings

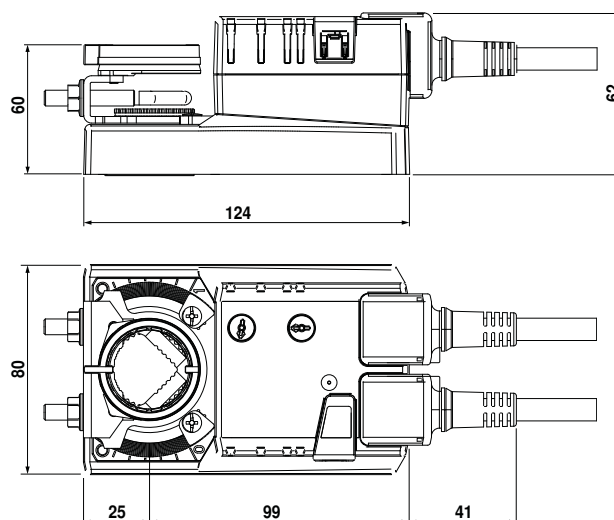

Damper spindle	Length	⌀
Clamp on top	min. 40	8...26.7
Clamp on bottom *	min. 20	8...20

* Option (Accessory K-NA)

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 10Nm
- Nominal voltage AC 100...240V
- Control: modulating DC (0)2...10V, position feedback DC 2...10V




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 3.5W @ nominal torque At rest 1W For wire sizing 6.5VA
	Connection	Power supply Cable 1m, 2 x 0.75mm ² Signals Cable 1m, 4 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 10Nm @ nominal voltage
	Control	Control signal Y DC (0)2...10V, typical input impedance 100kΩ Working range DC 2...10V
	Position feedback (Measuring voltage)	DC 2...10V, max. 1mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch 0 / 1
	Direction of rotation at Y = 0 V	at switch position 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s
	Sound power level	Max. 35dB(A)
Safety	Position indication	Mechanical, pluggable
	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 0.9kg

Dimensions [mm]

Dimensional drawings

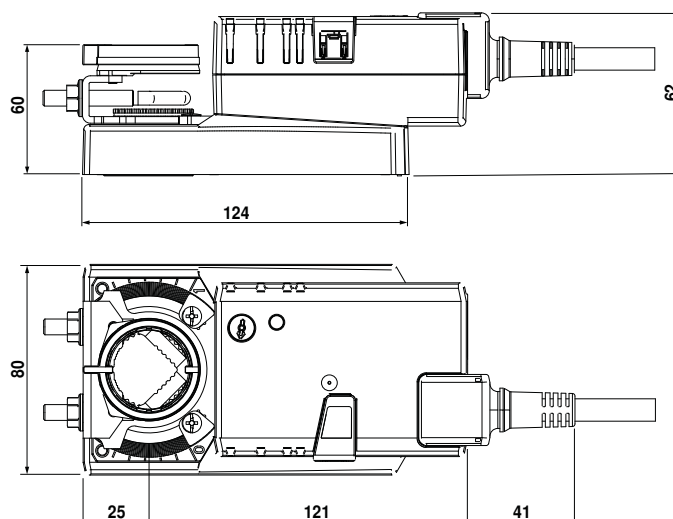

Damper spindle	Length	⊙ I ◇
Clamp on top	min. 40	8 ..26.7
Clamp on bottom *	min. 20	8...20

* Option (Accessory K-NA)

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 10Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 2.5W @ nominal torque
		At rest 0.6W
		For wire sizing 6VA
	Connection	Terminals 4mm ² (Cable Ø 6...8mm, three-core)
Functional data	Torque (nominal torque)	Min. 10Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, detentable
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s / 90°↔
	Sound power level	Max. 35dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1 (to EN 60730-1)
	Rated impulse voltage	4kV (to EN 60730-1)
	Control Pollution Degree	3 (to EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (to EN 60730-1)
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.8kg

Dimensions [mm]

Dimensional drawings

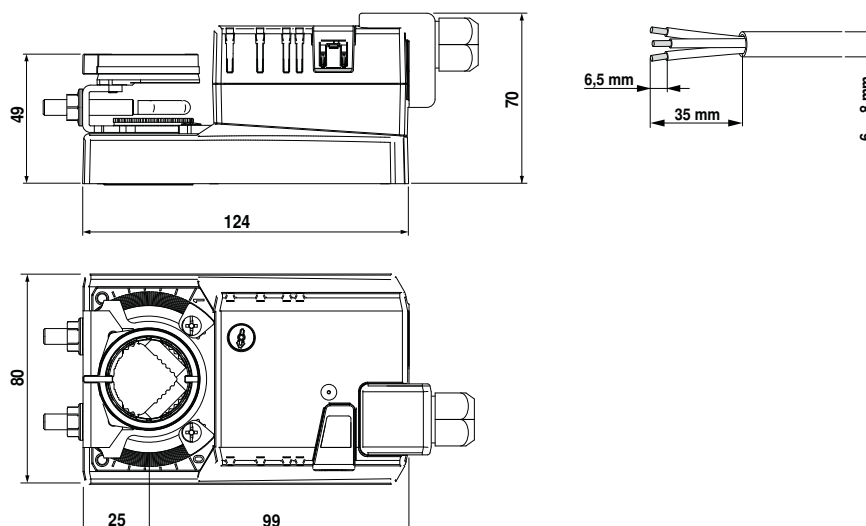

Damper spindle	Length	● I	■ I	◆ I
Clamp on top	<40	8...26.7	>8	<26.7
Clamp on bottom *	<20	8...20	>8	<20

* Option (Accessory K-NA)

Damper actuator for adjusting air dampers in ventilation and air-conditioning systems for building services installations

- Torque 20Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 2W @ nominal torque At rest 0.2W For wire sizing 4VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 20Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Running time	150s / 90°↺
	Sound power level	Max. 45dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	III Safety extra-low voltage / UL Class 2 Supply
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1
	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.h., non-condensating
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 1.1kg

Dimensions [mm]

Dimensional drawings

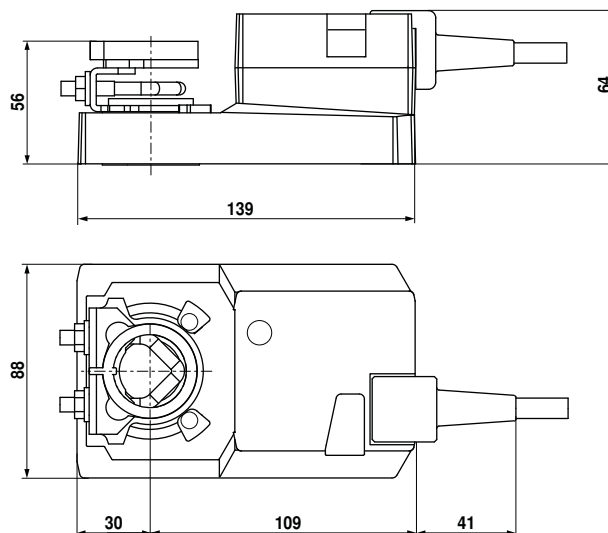

Damper spindle	Length	●	■	◆
	≥48	10...20 ¹⁾	≥10	≤20
	≥20	10...20 ¹⁾	≥10	≤20

¹⁾ CrNi (INOX) 12...20

Damper actuator for adjusting air dampers in ventilation and air-conditioning systems for building services installations

- Torque 20Nm
- Nominal voltage AC/DC 24V
- Control: Open-close or 3-point
- with integrated auxiliary switch




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 2W @ nominal torque At rest 0.2W For wire sizing 4VA
	Auxiliary switch	1 x SPDT, 1mA...3 (0.5) A, AC 250V $\square$ (0...100% adjustable)
Functional data	Connection	Motor Cable 1m, 3 x 0.75mm ² Auxiliary switch Cable 1m, 3 x 0.75mm ²
	Torque (nominal torque)	Min. 20Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 $\curvearrowright$ resp. 1 $\curvearrowleft$
	Manual override	Gearing latch disengaged with pushbutton, can be locked
Safety	Angle of rotation	Max. 95° $\curvearrowright$, can be limited at both ends with adjustable mechanical end stops
	Running time	150s / 90° $\curvearrowright$
	Sound power level	Max. 45dB(A)
	Position indication	Mechanical, pluggable
EMC	Protection class	III Safety extra-low voltage / UL Class 2 Supply
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	Certification	CE according to 2004/108/EC cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1
Dimensions / Weight	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
Dimensions / Weight	Ambient humidity range	95% r.h., non-condensating
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 1.2kg

Dimensions [mm]

Dimensional drawings

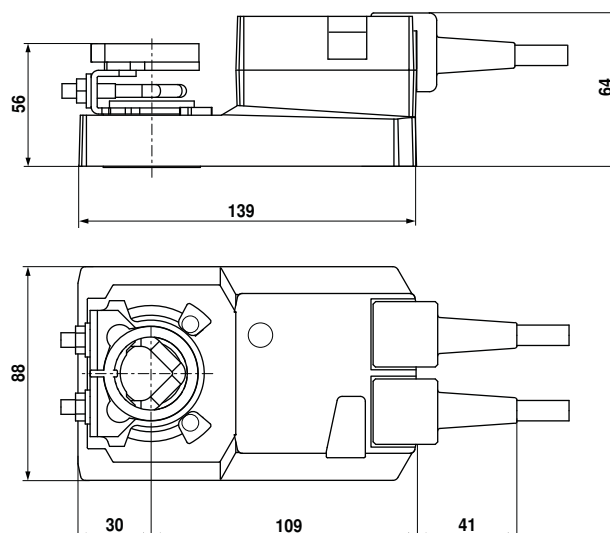

Damper spindle	Length			
	≥48	10...20 ¹⁾	≥10	≤20
	≥20	10...20 ¹⁾	≥10	≤20

¹⁾ CrNi (INOX) 12...20

Modulating damper actuator for adjusting air dampers in ventilation and air-conditioning systems for building services installations

- Torque 20Nm
- Nominal voltage AC/DC 24V
- Control: Modulating DC (0)2...10V
- Position feedback DC 2...10V




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 2W @ nominal torque At rest 0.4W For wire sizing 4VA
	Connection	Cable 1m, 4 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 20Nm @ nominal voltage
	Control	Control signal Y
	Operating range	DC (0)2...10V, typical input impedance 100kΩ DC 2...10V
	Position feedback (Measuring voltage U)	DC 2...10V, max. 1mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch 0 / 1
	Direction of motion at Y = 0 V	In switch position 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Running time	150s / 90°↺
Safety	Sound power level	Max. 45dB(A)
	Position indication	Mechanical, pluggable
	Protection class	III Safety extra-low voltage / UL Class 2 Supply
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1
	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature range	-30...+50°C
Dimensions / Weight	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.h., non-condensating
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 1.1kg

Dimensions [mm]

Dimensional drawings

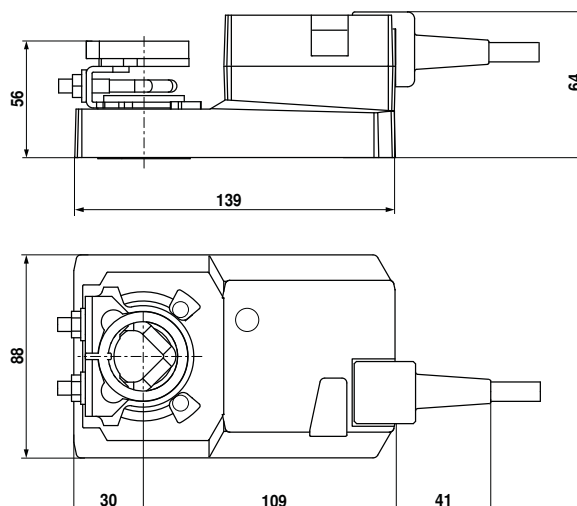

Damper spindle	Length	●	■	◆
	≥48	10...20 ¹⁾	≥10	≤20
	≥20	10...20 ¹⁾	≥10	≤20

¹⁾ CrNi (INOX) 12...20

Damper actuator for adjusting air dampers in ventilation and air-conditioning systems for building services installations

- Torque 20Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 2.5W @ nominal torque At rest 0.6W
	For wire sizing	6VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 20Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↔, can be limited at both ends with adjustable mechanical end stops
	Running time	150s / 90°↔
	Sound power level	Max. 45dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated 
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1
	Rated impulse voltage	2.5kV
	Control pollution degree	3
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.h., non-condensating
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 1.1kg

Dimensions [mm]

Dimensional drawings

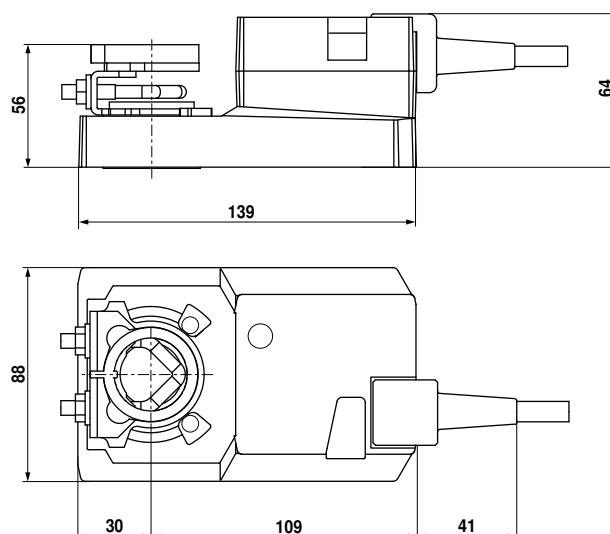

Damper spindle	Length			
	≥48	10...20 ¹⁾	≥10	≤20
	≥20	10...20 ¹⁾	≥10	≤20

¹⁾ CrNi (INOX) 12...20

Damper actuator for adjusting air dampers in ventilation and air-conditioning systems for building services installations

- Torque 20Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point
- with integrated auxiliary switch




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 2.5W @ nominal torque At rest 0.6W For wire sizing 6VA
	Auxiliary switch	1 x SPDT, 1mA...3 (0.5) A, AC 250V ☐ (0...100% adjustable)
Functional data	Connection	Motor Cable 1m, 3 x 0.75mm ² Auxiliary switch Cable 1m, 3 x 0.75mm ²
	Torque (nominal torque)	Min. 20Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 resp. 1
	Manual override	Gearing latch disengaged with pushbutton, can be locked
Safety	Angle of rotation	Max. 95° can be limited at both ends with adjustable mechanical end stops
	Running time	150s / 90°
	Sound power level	Max. 45dB(A)
	Position indication	Mechanical, pluggable
Dimensions / Weight	Protection class	II Totally insulated ☐
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1
	Rated impulse voltage	2.5kV
	Control pollution degree	3
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.h., non-condensating
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 1.2kg

Dimensions [mm]

Dimensional drawings

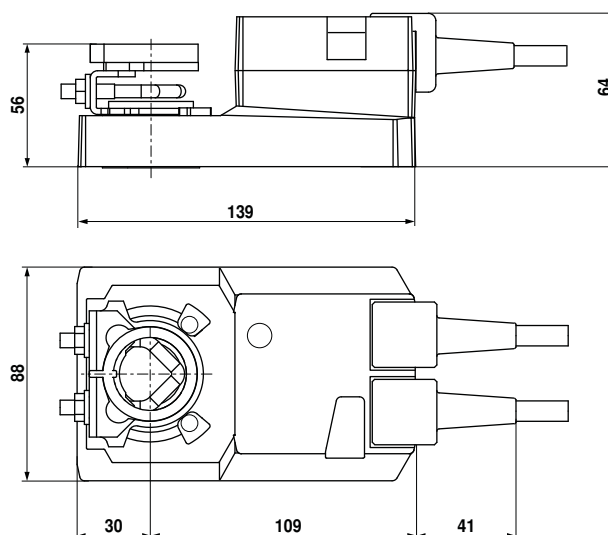

Damper spindle	Length			
	≥48	10...20 ¹⁾	≥10	≤20
	≥20	10...20 ¹⁾	≥10	≤20

¹⁾ CrNi (INOX) 12...20

Modulating damper actuator for adjusting air dampers in ventilation and air-conditioning systems for building services installations

- Torque 20Nm
- Nominal voltage AC 100...240V
- Control: Modulating DC (0)2...10V
- Position feedback DC 2...10V



Technical data


Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 3.5W @ nominal torque At rest 0.6W For wire sizing 6.5VA
	Connection	Power supply Cable 1m, 2 x 0.75mm ² Signals Cable 1m, 4 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 20Nm @ nominal voltage
	Control	Control signal Y DC (0)2...10V, typical input impedance 100kΩ Operating range DC 2...10V
	Position feedback (Measuring voltage U)	DC 2...10V, max. 1mA
	Auxiliary supply	DC 24V ±30%, max. 10mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch 0 / 1
	Direction of motion at Y = 0V	In switch position 0 ↻ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↻, can be limited at both ends with adjustable mechanical end stops
	Running time	150s / 90°↻
	Sound power level	Max. 45dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated 
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1
	Rated impulse voltage	2.5kV
	Control pollution degree	3
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
Dimensions / Weight	Ambient humidity range	95% r.h., non-condensating
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 1.1kg

Dimensions [mm]

Dimensional drawings

Damper spindle	Length			
	≥48	10...20 ¹⁾	≥10	≤20
	≥20	10...20 ¹⁾	≥10	≤20

¹⁾ CrNi (INOX) 12...20

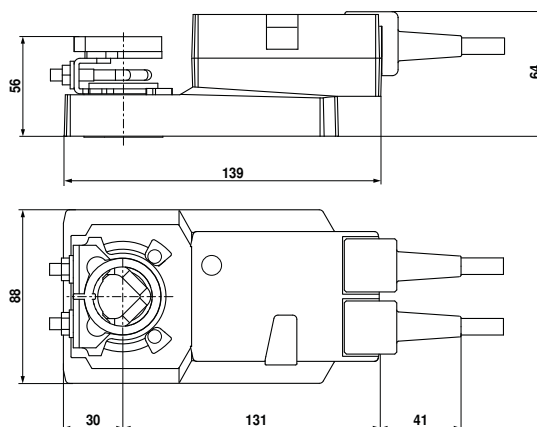

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

• For air control dampers up to approx. 8m²

• Torque 40Nm

• Nominal voltage AC/DC 24V

• Control: Open-close

(not made for 3-point applications)





Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz DC 24V
	Nominal voltage range	AC/DC 19.2...28.8V
	Power consumption	In operation 4W @ nominal torque At rest 2W For wire sizing 6VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 40Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, detentable
	Angle of rotation	Max. 95°↺, limited on both sides by means of adjustable, mechanical end stops
	Running time	150s / 90°↺
	Sound power level	Max. 45dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	III Safety extra-low voltage
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Mode of operation	Type 1 (EN 60730-1)
	Rated impulse voltage	0.8kV (EN 60730-1)
	Control pollution degree	3 (EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 1.7kg

Dimensions [mm]

Dimensional drawings

Damper spindle	Length	⊙	■	◆
	> 52	12...26.7	>12	<25.2
	> 20	12...26.7	>12	<25.2

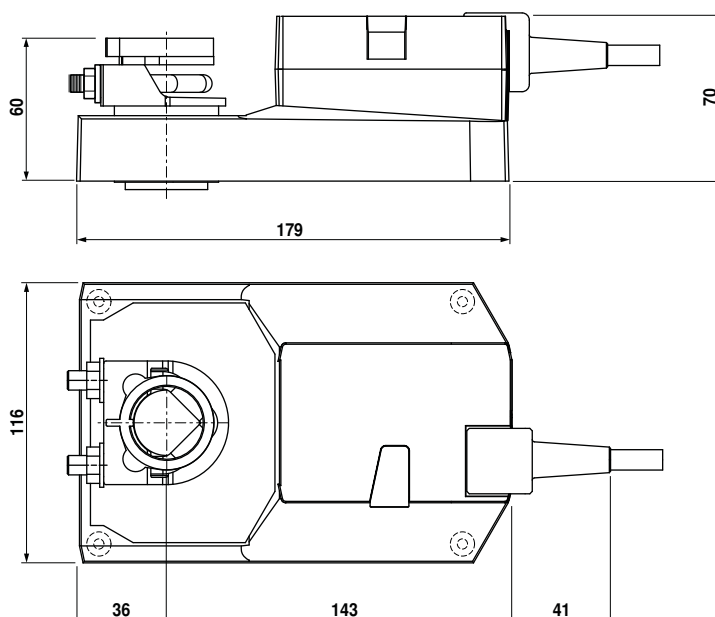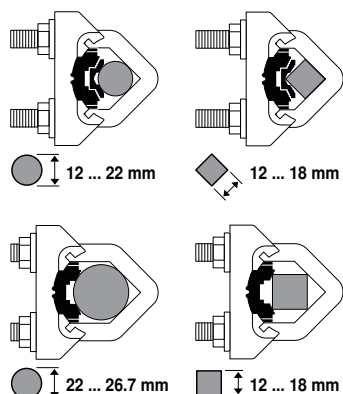

Modulating damper actuator for adjusting dampers in technical building installations

- Nominal torque 40Nm
- Nominal voltage AC/DC 24V
- Control modulating DC (0)2...10V
- Position feedback DC 2...10V





Technical data

Electrical data	Nominal voltage	AC/DC 24V
	Nominal voltage frequency	50/60Hz
	Nominal voltage range	AC 19.2...28.8V / DC 19.2...28.8V
	Power consumption in operation	4.5W
	Power consumption at rest	2W
	Power consumption for wire sizing	6.5VA
	Sensor element	Cable 1m, 4 x 0.75mm ²
Functional data	Torque motor	min. 40Nm
	Control positioning signal Y	DC (0)2...10V
	Control positioning signal Y note	Typical input impedance 100kΩ
	Control operating range	DC 2...10V
	Position feedback (measuring voltage U)	DC 2...10V
	Position feedback measuring voltage U note	Max. 1mA
	Position accuracy	±5%
	Direction of rotation motor	Can be selected with switch 0/1
	Running direction	Y = 0V: At switch position 0 (counter-clockwise rotation) / 1 (clockwise rotation)
	Manual override	Gear disengagement with push-button, can be locked
	Angle of rotation	max. 95°
	Running time motor	150s / 90°
	Sound power level motor max.	45dB(A)
	Spindle driver	Universal spindle clamp reversible 12...26mm
	Position indication	Mechanical, pluggable
Safety	Protection class IEC/EN	III Safety extra-low voltage
	Protection class UL	UL Class 2 Supply
	Degree of protection IEC/EN	IP54 in all mounting positions
	Degree of protection NEMA/UL	NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification IEC/EN	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Certification UL	cULus according to UL 60730-1A, UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1
	Rated current voltage motor	0.8kV
	Control pollution degree	3
	Ambient temperature	-30...50°C
	Non-operating temperature	-40...80°C
Weight	Ambient humidity	95% r.h., non-condensing
	Maintenance	Maintenance-free
	Weight	Approx. 1.8kg


Dimensions [mm]

Dimensional drawings

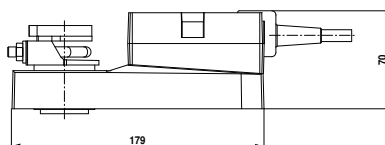

Clamping ranges

		
12...22	12...18	
		
22...26.7	12...18	

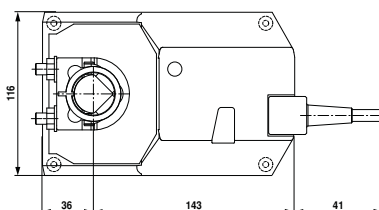

UL marked actuators is optional, please contact your local Sales Representative for details.

Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 40Nm
- Nominal voltage AC 100...240V
- Control: Open-close
(not made for 3-point applications)





Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 5W @ nominal torque At rest 2W For wire sizing 9VA
	Connection	Cable 1m, 3 x 0.75mm²
Functional data	Torque (nominal torque)	Min. 40Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 or 1
	Manual override	Gearing latch disengaged with pushbutton, detentable
	Angle of rotation	Max. 95° limited on both sides by means of adjustable, mechanical end stops
	Running time	150s / 90°
	Sound power level	Max. 45dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC CE according to 2006/95/EC
	Low voltage directive	
	Mode of operation	Type 1 (EN 60730-1)
	Rated impulse voltage	2.5kV (EN 60730-1)
	Control pollution degree	3 (EN 60730-1)
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 1.8kg

Dimensions [mm]

Dimensional drawings

Damper spindle	Length			
	> 52	12...26.7	>12 < 25.2	
	> 20	12...26.7	>12 < 25.2	

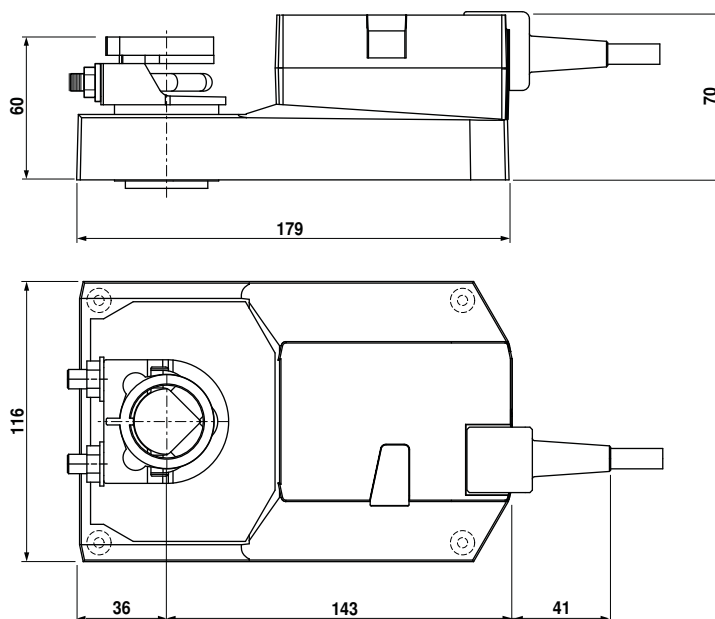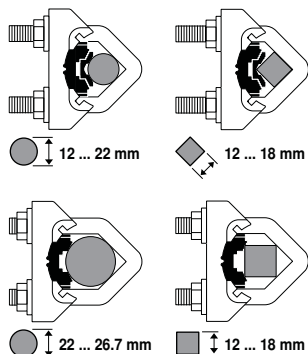

Damper actuator for adjusting air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 4Nm
- Nominal voltage AC/DC 24V
- Control: Open-close
(not made for 3-point applications)
- Running time 2.5s




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 13W @ nominal torque At rest 2W For wire sizing 23VA (I max. 20A @ 5ms)
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 4Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Angle of rotation limiting	min. 30°↺
	Running time	2.5s / 90°↺
	Automatic adjustment of operating range to match the mechanical angle of rotation	Manual triggering of the adaption by pressing the «Adaption» button
	Sound power level	52dB(A)
	Position indication	Mechanical, pluggable
	Negative torque	⚠ ≤50% from nominal torque (with restrictions)*
Safety	Protection class	III Safety extra-low voltage UL Class 2 Supply
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1
	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature	–30...+40°C (no restrictions) ⚠ +40...+50°C (with restrictions)*
	Non-operating temperature	–40...+80°C
	Ambient humidity	95% r.H., non-condensating
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.97kg

* Under these operating conditions, the lift cycle of actuator will be reduced. Please contact your Belimo representative for details

Dimensions [mm]

Dimensional drawings

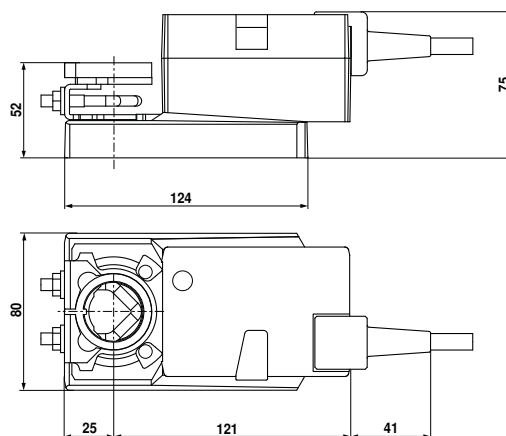

Damper spindle	Length			
	≥40	8...26.7	≥8	≤26.7
 *	≥20	8...20	≥8	≤20

* Option (accessory K-NA)
When using an auxiliary switch or feedback potentiometer.

UL marked actuators is optional, please contact your local Sales Representative for details.

Modulating damper actuator for adjusting air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 4Nm
- Nominal voltage AC/DC 24V
- Control: modulating DC (0)2...10V
- Position feedback DC 2...10V
- Running time 2.5s



Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 13W @ nominal torque At rest 2W For wire sizing 23VA (I max. 20 A @ 5 ms)
	Connection	Cable 1m, 4 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 4Nm @ nominal voltage
	Control	Control signal Y DC (0)2...10V, input impedance 100kΩ Operating range DC 2...10V
	Position feedback (Measuring voltage)	DC 2...10V, max. 0.5mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch 0 / 1
	Direction of motion at Y = 0 V	At switch position 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Angle of rotation limiting	min. 30°↺
	Running time	2.5s / 90°↺
	Automatic adjustment of operating range and measuring signal U to match the mechanical angle of rotation	Manual triggering of the adaption by pressing the «Adaption» button
	Sound power level	52dB(A)
	Position indication	Mechanical, pluggable
	Negative torque	⚠ ≤50% from nominal torque (with restrictions)*
Safety	Protection class	III Safety extra-low voltage, UL Class 2 Supply
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1
	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature	-30...+40°C (no restrictions) ⚠ +50°C (with restrictions)*
	Non-operating temperature	-40...+80°C
	Ambient humidity	95% r.H., non-condensating
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 0.98kg


* Under these operating conditions, the lift cycle of actuator will be reduced. Please contact your Belimo representative for details

Dimensions [mm]

Dimensional drawings

Damper spindle	Length	⌀I	⌀II	⌀III
	≥40	8...26.7	≥8	≤26.7
*	≥20	8...20	≥8	≤20

* Option (accessory K-NA)
When using an auxiliary switch or feedback potentiometer.

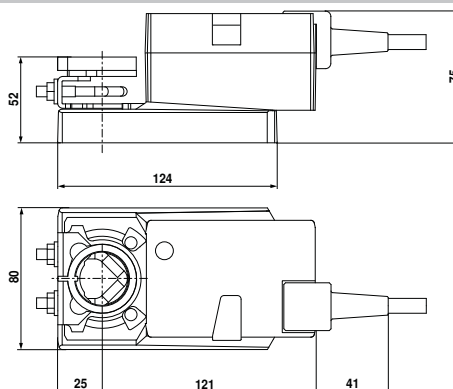

Damper actuator for adjusting air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 8Nm
- Nominal voltage AC/DC 24V
- Control: Open-close
(not made for 3-point applications)
- Running time 4s




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 13W @ nominal torque At rest 2W For wire sizing 23VA (I max. 20A @ 5ms)
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 8Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Angle of rotation limiting	min. 30°↺
	Running time	4s / 90°↺
	Automatic adjustment of operating range to match the mechanical angle of rotation	Manual triggering of the adaption by pressing the «Adaption» button
	Sound power level	52dB(A)
	Position indication	Mechanical, pluggable
	Negative torque	⚠ ≤50% from nominal torque (with restrictions)*
Safety	Protection class	III Safety extra-low voltage, UL Class 2 Supply
	Degree of protection	IP54 in any mounting position, NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1
	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature	−30...+40°C (no restrictions) ⚠ +40...+50°C (with restrictions)*
	Non-operating temperature	−40...+80°C
	Ambient humidity	95% r.H., non-condensating
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 1.1kg

* Under these operating conditions, the lift cycle of actuator will be reduced. Please contact your Belimo representative for details

Dimensions [mm]

Dimensional drawings

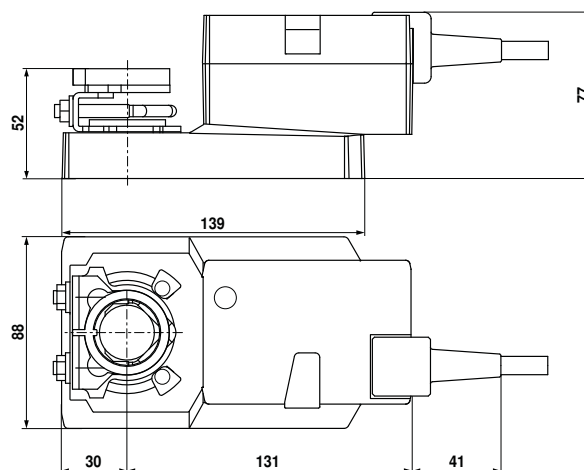

Damper spindle	Length	● I	■ I	◆ I
	≥42	8...26.7	≥8	≤26.7
*	≥20	8...20	≥8	≤20

* Option (accessory K-SA)
When using an auxiliary switch or feedback potentiometer.

Modulating damper actuator for adjusting air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 8Nm
- Nominal voltage AC/DC 24V
- Control: modulating DC (0)2...10V
- Position feedback DC 2...10V
- Running time 4s




Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 13W @ nominal torque At rest 2W For wire sizing 23VA (I max. 20A @ 5ms)
	Connection	Cable 1m, 4 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 8Nm @ nominal voltage
	Control	Control signal Y Operating range DC (0)2...10V, input impedance 100kΩ DC 2...10V
	Position feedback (Measuring voltage)	DC 2...10V, max. 0.5mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch 0 / 1
	Direction of motion at Y = 0 V	At switch position 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Angle of rotation limiting	min. 30°↺
	Running time	4s / 90°↺
	Automatic adjustment of operating range and measuring signal U to match the mechanical angle of rotation	Manual triggering of the adaption by pressing the «Adaption» button
	Sound power level	52dB(A)
	Position indication	Mechanical, pluggable
	Negative torque	⚠ ≤50% from nominal torque (with restrictions)*
Safety	Protection class	III Safety extra-low voltage UL Class 2 Supply
	Degree of protection	IP54 in any mounting position NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1
	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature	−30...+40°C (no restrictions) ⚠ +50°C (with restrictions)*
	Non-operating temperature	−40...+80°C
	Ambient humidity	95% r.H., non-condensating
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 1.2kg

* Under these operating conditions, the lift cycle of actuator will be reduced. Please contact your Belimo representative for details

Dimensions [mm]

Dimensional drawings

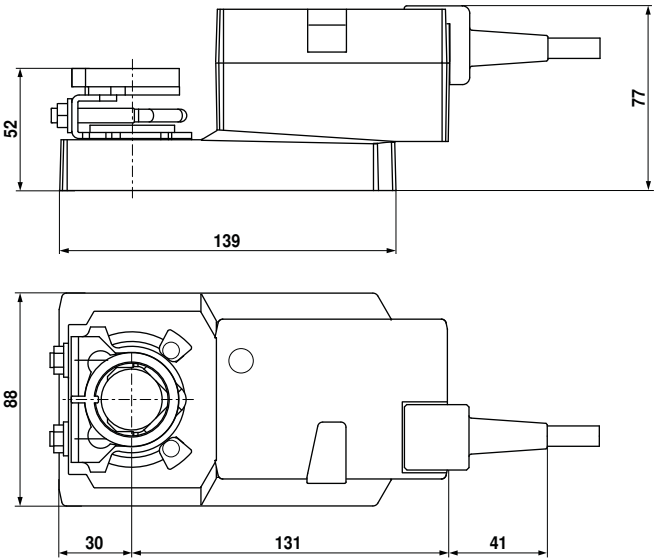

Damper spindle	Length			
	≥42	8...26.7	≥8	≤26.7
 *	≥20	8...20	≥8	≤20

* Option (accessory K-SA)
When using an auxiliary switch or feedback potentiometer.

Damper actuator for adjusting air dampers in ventilation and air-conditioning systems for building services installations

- Torque 8Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point
- Running time 20s




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 3W @ nominal torque At rest 1W For wire sizing 5.5VA
	Connection	Cable 1m, 3 x 0.75mm²
Functional data	Torque (nominal torque)	Min. 8Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ or 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, detentable
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Running time	20s / 90°↺
	Sound power level	Max. 55dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated
	Degree of protection	IP54 NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1
	Rated impulse voltage	4kV
	Control pollution degree	3
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
Dimensions / Weight	Ambient humidity range	95% r.h., non-condensating
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.85kg

Dimensions [mm]

Dimensional drawings

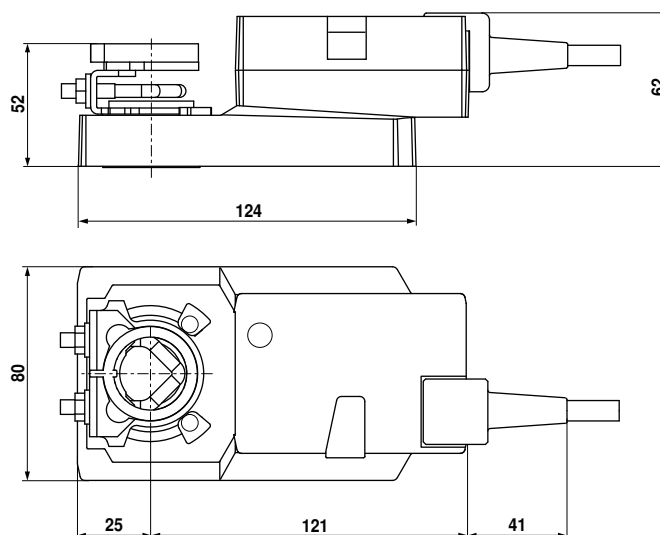

Damper spindle	Length			
	≥40	8...26.7 ¹⁾	≥8	≤26.7
	≥20	8...20 ¹⁾	≥8	≤20

¹⁾ CrNi (INOX) 12...20

Damper actuator for adjusting air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 16Nm
- Nominal voltage AC/DC 24V
- Control: Open-close
(not made for 3-point applications)
- Running time 7s



Technical data



Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 15W @ nominal torque At rest 2W For wire sizing 26VA (I max. 20 A @ 5 ms)
Functional data	Connection	Cable 1m, 3 x 0.75mm ²
	Torque (nominal torque)	Min. 16Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↻ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↯, can be limited at both ends with adjustable mechanical end stops
	Angle of rotation limiting	min. 30°↯
	Running time	7s / 90°↯
	Automatic adjustment of operating range to match the mechanical angle of rotation	Manual triggering of the adaption by pressing the «Adaption» button
	Sound power level	63dB(A)
	Position indication	Mechanical, pluggable
	Negative torque	⚠ ≤50% from nominal torque (with restrictions)*
Safety	Protection class	III Safety extra-low voltage, UL Class 2 Supply
	Degree of protection	IP54 in any mounting position, NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1
	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature	–30...+40°C (no restrictions) ⚠ +40...+50°C (with restrictions)*
	Non-operating temperature	–40...+80°C
	Ambient humidity	95% r.H., non-condensating
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 1.9kg

* Under these operating conditions, the lift cycle of actuator will be reduced. Please contact your Belimo representative for details

Dimensions [mm]

Dimensional drawings

Damper spindle	Length	⊙	⊞	⬠
	≥52	12...26.7	≥12	≤25.5
	≥20	12...26.7	≥12	≤25.5

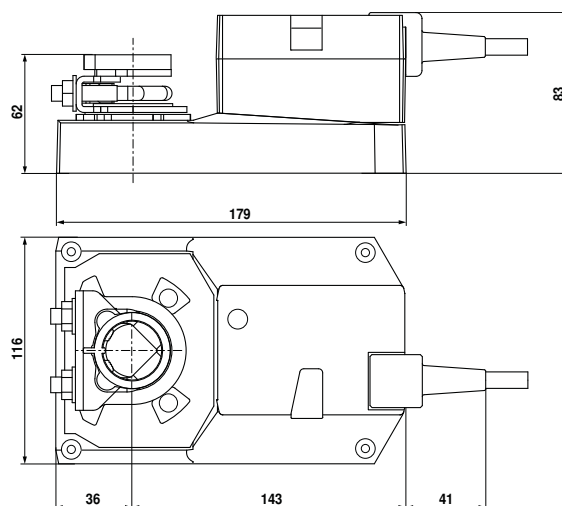

* When using an auxiliary switch or feedback potentiometer.

Modulating damper actuator for adjusting air control dampers in ventilation and air-conditioning systems for building services installations

- Torque 16Nm
- Nominal voltage AC/DC 24V
- Control: modulating DC (0)2...10V
- Position feedback DC 2...10V
- Running time 7s



Technical data


Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 15W @ nominal torque At rest 2W For wire sizing 26VA (I max. 20A @ 5ms)
	Connection	Cable 1m, 4 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 16Nm @ nominal voltage
	Control	Control signal Y DC (0)2...10V, input impedance 100kΩ Operating range DC 2...10V
	Position feedback (Measuring voltage)	DC 2...10V, max. 0.5mA
	Position accuracy	±5%
	Direction of rotation	Reversible with switch 0 / 1
	Direction of motion at Y = 0V	At switch position 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↔, can be limited at both ends with adjustable mechanical end stops
	Angle of rotation limiting	min. 30°↔
	Running time	7s / 90°↔
	Automatic adjustment of operating range and measuring signal U to match the mechanical angle of rotation	Manual triggering of the adaption by pressing the «Adaption» button
	Sound power level	63dB(A)
	Position indication	Mechanical, pluggable
	Negative torque	⚠ ≤50% from nominal torque (with restrictions)*
Safety	Protection class	III Safety extra-low voltage UL Class 2 Supply
	Degree of protection	IP54 in any mounting position, NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1
	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature	-30...+40°C (no restrictions) +50°C (with restrictions)*
	Non-operating temperature	⚠ -40...+80°C
	Ambient humidity	95% r.H., non-condensating
	Maintenance	Maintenance-free
	Dimensions / Weight	Dimensions See «Dimensions» Weight Approx. 1.9kg

* Under these operating conditions, the lift cycle of actuator will be reduced. Please contact your Belimo representative for details


Dimensions [mm]

Dimensional drawings

Damper spindle	Length			
	≥52	12...26.7	≥12	≤25.5
 *	≥20	12...26.7	≥12	≤25.5



* When using an auxiliary switch or feedback potentiometer.

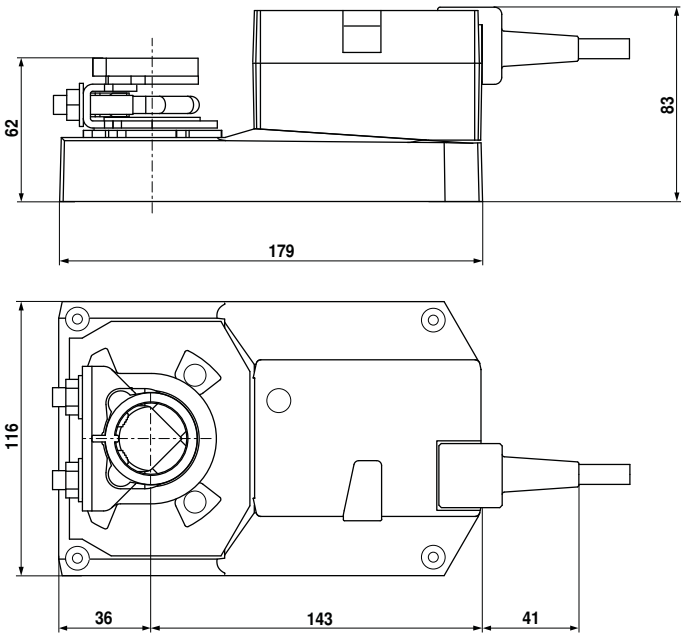

Damper actuator for adjusting air dampers in ventilation and air-conditioning systems for building services installations

- Torque 16Nm
- Nominal voltage AC 100...240V
- Control: Open-close or 3-point
- Running time 20s




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 4.5W @ nominal torque At rest 1W For wire sizing 8VA
	Connection	Cable 1m, 3 x 0.75mm ²
Functional data	Torque (nominal torque)	Min. 16Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Running time	20s / 90°↺
	Sound power level	Max. 55dB(A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated
	Degree of protection	IP54 NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1
	Rated impulse voltage	4kV
	Control pollution degree	3
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
Dimensions / Weight	Ambient humidity range	95% r.h., non-condensating
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 1.1kg

Dimensions [mm]

Dimensional drawings

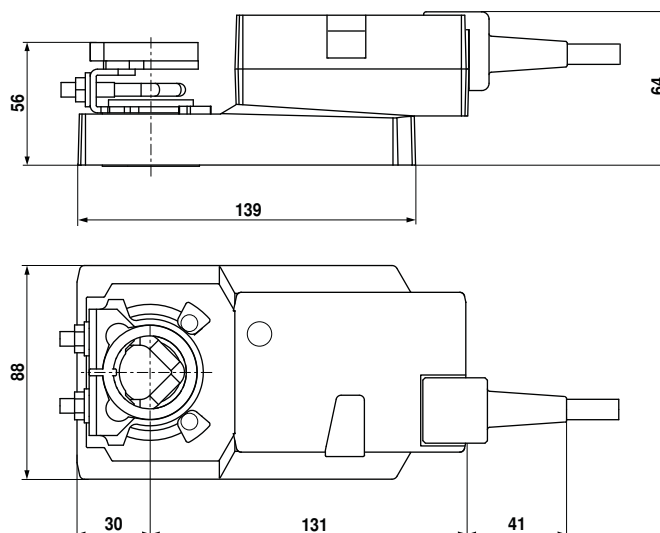

Damper spindle	Length			
	≥48	10...20 ¹⁾	≥10	≤20
	≥20	10...20 ¹⁾	≥10	≤20

¹⁾ CrNi (INOX) 12...20

Spring return actuator for the operation of air dampers that perform safety functions (e.g. frost and smoke protection, hygiene, etc.) for building services installations

- Torque 2.5Nm
- Nominal voltage AC/DC 24V
- Control: Open-close




Technical data

Electrical data	Nominal voltage		AC 24V, 50/60Hz DC 24V
	Nominal voltage range		AC 19.2...28.8V DC 21.6...28.8V
	Power consumption	In operation	2.5W @ nominal torque
		At rest	1.5W
Functional data	For wire sizing		5VA
	Connection		Cable 1m, 2 x 0.75mm ²
	Torque	Motor	Min. 2.5Nm @ nominal voltage
		Spring return	Min. 2.5Nm
	Direction of rotation		Selected by mounting L / R
	Angle of rotation		Max. 95° ↺ (adjustable 37...100% ↺ with built-in mechanical stop)
	Running time	Motor	< 75s (0...2Nm)
		Spring return	< 25s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor	Max. 50dB(A)
		Spring return	Approx. 62dB(A)
	Service life		Min. 60,000 operations
	Position indication		Mechanical
Safety	Protection class		III Safety extra-low voltage
	Degree of protection		IP42 in any mounting position
	EMC		CE according to 2004/108/EC
	Mode of operation		Type 1.AA (to EN 60730-1)
	Overvoltage category		III
	Control pollution degree		3
	Ambient temperature range		-30...+50°C
	Non-operating temperature		-40...+80°C
	Ambient humidity range		95% r.H., non-condensating (EN 60730-1)
	Maintenance		Maintenance-free
Dimensions / Weight	Dimensions		See «Dimensions»
	Weight		Approx. 0.68kg

Dimensions [mm]

Dimensional drawings

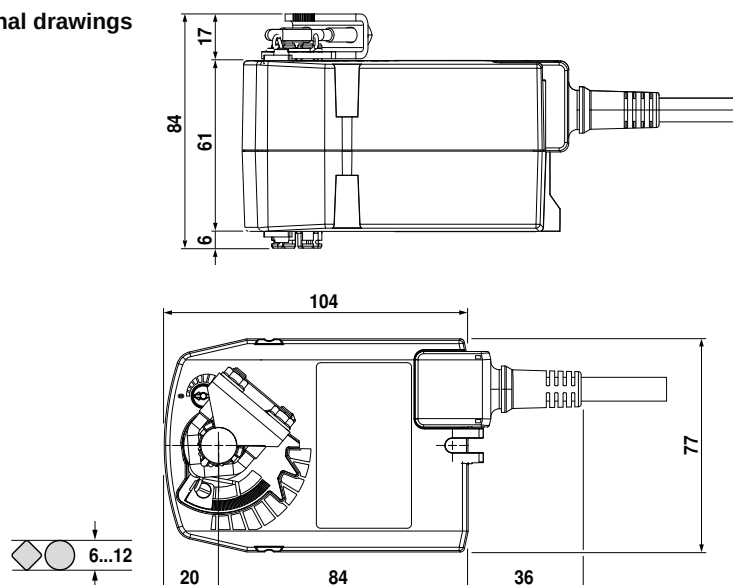

Spring return actuator for the operation of air dampers that perform safety functions (e.g. frost and smoke protection, hygiene, etc.) for building services installations

- Torque 2.5Nm
- Nominal voltage AC/DC 24V
- Control: Open-close
- Integrated auxiliary switch




Technical data

Electrical data	Nominal voltage		AC 24V, 50/60Hz DC 24V
	Nominal voltage range		AC 19.2...28.8V DC 21.6...28.8V
	Power consumption	In operation	2.5W @ nominal torque
		At rest	1.5W
		For wire sizing	5VA
	Auxiliary switch		1 x SPDT 3 (0.5) A, AC 250V □ (Switching point adjustable 0...100% ◁)
Functional data	Connection	Motor	Cable 1m, 2 x 0.75mm ²
		Auxiliary switch	Cable 1m, 3 x 0.75mm ²
	Torque Motor		Min. 2.5Nm @ nominal voltage
	Spring return		Min. 2.5Nm
	Direction of rotation		Selected by mounting L / R
	Angle of rotation		Max. 95° ◁ (adjustable 37...100% ◁ with built-in mechanical stop)
	Running time	Motor	< 75s (0...2Nm)
		Spring return	< 25s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor	Max. 50dB(A)
		Spring return	Approx. 62dB(A)
	Service life		Min. 60,000 operations
	Position indication		Mechanical
Safety	Protection class		III Safety extra-low voltage
	Degree of protection		IP42 in any mounting position
	EMC		CE according to 2004/108/EC
	Low voltage directive		CE according to 2006/95/EC
	Mode of operation		Type 1.AA.B (to EN 60730-1)
	Overvoltage category		III
	Control pollution degree		3
	Ambient temperature range		-30...+50°C
	Non-operating temperature		-40...+80°C
	Ambient humidity range		95% r.H., non-condensating (EN 60730-1)
Dimensions / Weight	Maintenance		Maintenance-free
	Dimensions		See «Dimensions»
	Weight		Approx. 0.78kg

Dimensions [mm]

Dimensional drawings

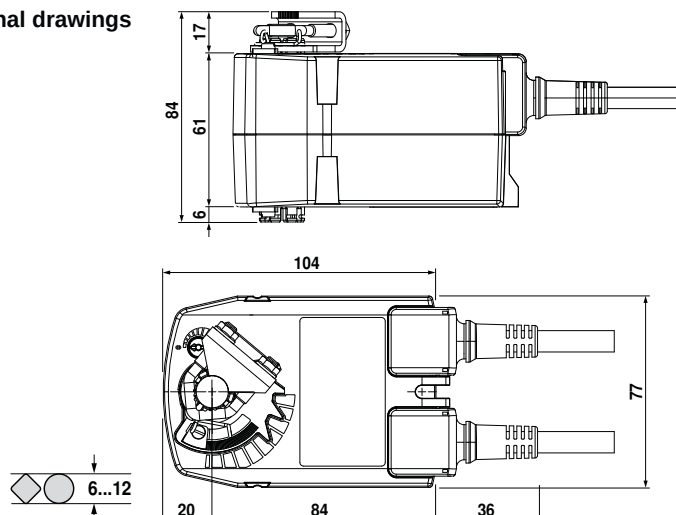

Spring return actuator for the operation of air dampers that perform safety functions (e.g. frost and smoke protection, hygiene, etc.) for building services installations

- Torque 2.5Nm
- Nominal voltage AC 24V
- Control: 3-point




Technical data

Electrical data	Nominal voltage		AC 24V, 50/60Hz
	Nominal voltage range		AC 19.2...28.8V
	Power consumption	In operation	2.5W @ nominal torque
		At rest	1W
Functional data	For wire sizing		4VA
	Connection		Cable 1m, 4 x 0.75mm ²
	Torque	Motor	Min. 2.5Nm @ nominal voltage
		Spring return	Min. 2.5Nm
	Direction of rotation	Motor	Selectet with switch ↺ bzw. ↻
		Spring return	Selected by mounting L / R
	Angle of rotation		Max. 95° ↺ (adjustable 37...100% ↺ with built-in mechanical stop)
	Running time	Motor	< 150s (0...2Nm)
		Spring return	< 25s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor	Max. 35dB(A)
		Spring return	Approx. 62dB(A)
	Service life		Min. 60,000 operations
	Position indication		Mechanical
Safety	Protection class		III Safety extra-low voltage
	Degree of protection		IP42 in any mounting position
	EMC		CE according to 2004/108/EC
	Mode of operation		Type 1.AA (to EN 60730-1)
	Overvoltage category		III
	Control pollution degree		3
	Ambient temperature range		-30...+50°C
	Non-operating temperature		-40...+80°C
	Ambient humidity range		95% r.H., non-condensating (EN 60730-1)
	Maintenance		Maintenance-free
Dimensions / Weight	Dimensions		See «Dimensions»
	Weight		Approx. 0.64kg

Dimensions [mm]

Dimensional drawings

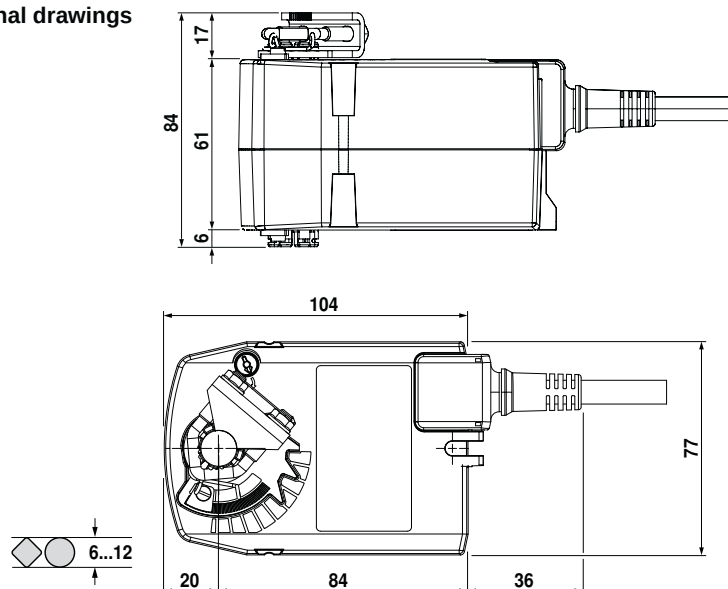

Spring return actuator for the operation of air dampers that perform safety functions (e.g. frost and smoke protection, hygiene, etc.) for building services installations

- Torque 2.5Nm
- Nominal voltage AC/DC 24V
- Control: modulating DC (0)2...10V, position feedback DC 2...10V




Technical data

Electrical data	Nominal voltage		AC 24V, 50/60Hz DC 24V
	Nominal voltage range		AC 19.2...28.8V DC 21.6...28.8V
	Power consumption	In operation	2.5W @ nominal torque
		At rest	1W
Functional data	For wire sizing		4VA
	Connection		Cable 1m, 4 x 0.75mm ²
	Torque	Motor	Min. 2.5Nm @ nominal voltage
		Spring return	Min. 2.5Nm
	Control	Control signal Y	DC (0)2...10V, typical input impedance 100kΩ
		Working range	DC 2...10V
	Position feedback (Measuring voltage)		DC 2...10V, max. 0.5mA
	Direction of rotation	Motor	Selectet with switch ↻ bzw. ↻
		Spring return	Selected by mounting L / R
	Angle of rotation		Max. 95° ↻ (adjustable 37...100% ↻ with built-in mechanical stop)
	Running time	Motor	150s (0...2Nm)
		Spring return	< 25s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor	Max. 35dB(A)
		Spring return	Approx. 62dB(A)
Safety	Service life		Min. 60,000 operations
	Position indication		Mechanical
	Protection class		III Safety extra-low voltage
	Degree of protection		IP42 in any mounting position
	EMC		CE according to 2004/108/EC
	Mode of operation		Type 1.AA (to EN 60730-1)
	Overvoltage category		III
	Control pollution degree		3
	Ambient temperature range		-30...+50°C
	Non-operating temperature		-40...+80°C
	Ambient humidity range		95% r.H., non-condensating (EN 60730-1)
	Maintenance		Maintenance-free
Dimensions / Weight	Dimensions		See «Dimensions»
	Weight		Approx. 0.69kg

Dimensions [mm]

Dimensional drawings

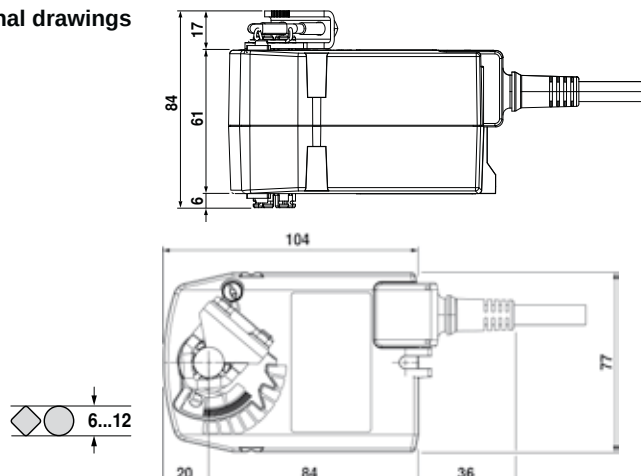

Spring return actuator for the operation of air dampers that perform safety functions (e.g. frost and smoke protection, hygiene, etc.) for building services installations

- Torque 2.5Nm
- Nominal voltage AC 100...240V
- Control: Open-close




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz	
	Nominal voltage range	AC 85...265V	
	Power consumption	In operation	2.5W @ nominal torque
		At rest	1.5W
Functional data		For wire sizing	5VA
	Connection	Cable 1m, 2 x 0.75mm ²	
	Torque	Motor	Min. 2.5Nm @ nominal voltage
		Spring return	Min. 2.5Nm
	Direction of rotation	Selected by mounting L / R	
	Angle of rotation	Max. 95° <↗ (adjustable 37...100% <↗ with built-in mechanical stop)	
	Running time	Motor	< 75s (0...2Nm)
		Spring return	< 25s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor	Max. 50dB(A)
		Spring return	Approx. 62dB(A)
Safety	Service life	Min. 60,000 operations	
	Position indication	Mechanical	
	Protection class	II Totally insulated ☐	
	Degree of protection	IP42 in any mounting position	
	EMC	CE according to 2004/108/EC	
	Low voltage directive	CE according to 2006/95/EC	
	Mode of operation	Type 1.AA (to EN 60730-1)	
	Overvoltage category	III	
	Control pollution degree	3	
	Ambient temperature range	-30...+50°C	
Dimensions / Weight	Non-operating temperature	-40...+80°C	
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)	
	Maintenance	Maintenance-free	
	Dimensions	See «Dimensions»	
	Weight	Approx. 0.68kg	

Dimensions [mm]

Dimensional drawings

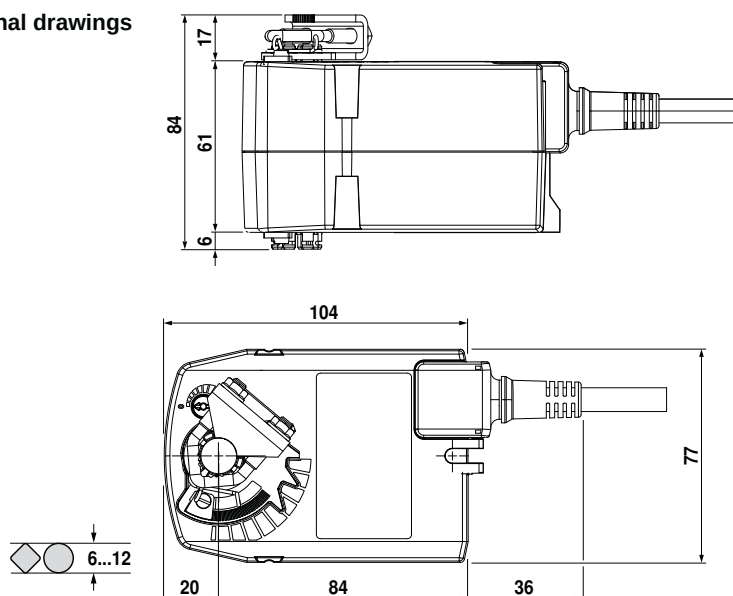

Spring return actuator for the operation of air dampers that perform safety functions (e.g. frost and smoke protection, hygiene, etc.) for building services installations

- Torque 2.5Nm
- Nominal voltage AC 100...240V
- Control: Open-close
- Integrated auxiliary switch




Technical data

Electrical data	Nominal voltage	AC 100...240V, 50/60Hz
	Nominal voltage range	AC 85...265V
	Power consumption	In operation 2.5W @ nominal torque At rest 1.5W For wire sizing 5VA
	Auxiliary switch	1 x SPDT 3 (0.5) A, AC 250V ☐ (Switching point adjustable 0...100% <Δ>)
	Connection	Motor Cable 1m, 2 x 0.75mm ² Auxiliary switch Cable 1m, 3 x 0.75mm ²
Functional data	Torque	Motor Min. 2.5Nm @ nominal voltage Spring return Min. 2.5Nm
	Direction of rotation	Selected by mounting L / R
	Angle of rotation	Max. 95° <Δ> (adjustable 37...100% <Δ> with built-in mechanical stop)
	Running time	Motor < 75s (0...2Nm) Spring return < 25s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor Max. 50dB(A) Spring return Approx. 62dB(A)
	Service life	Min. 60,000 operations
	Position indication	Mechanical
Safety	Protection class	II Totally insulated ☐
	Degree of protection	IP42 in any mounting position
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Mode of operation	Type 1.AA.B (to EN 60730-1)
	Overvoltage category	III
	Control pollution degree	3
	Ambient temperature range	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity range	95% r.H., non-condensating (EN 60730-1)
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 0.79kg

Dimensions [mm]

Dimensional drawings

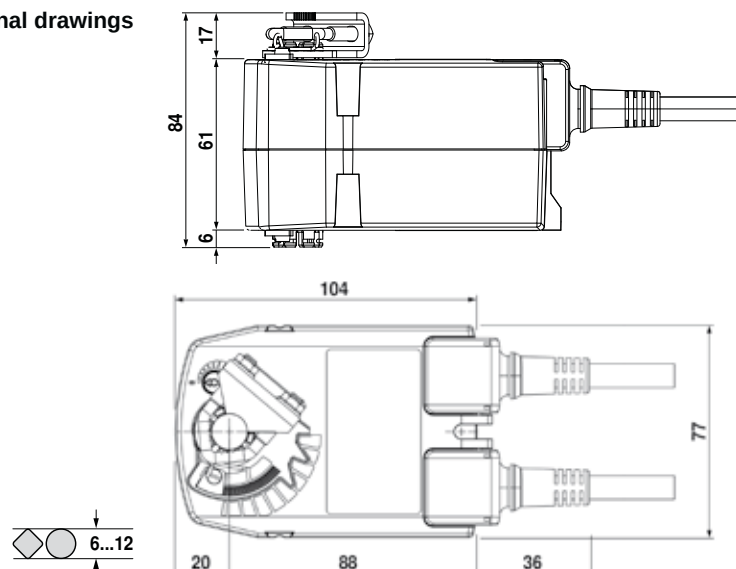

For operation of air control dampers that perform safety function


- Torque: 4Nm
- Nominal voltage: AC/DC 24V
- Control: Open/Close
- Integrated auxiliary switch (LF24-S)



Technical data

Electrical data	Nominal voltage	AC 24V 50/60Hz, DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	5W @ nominal torque / 2.5W @ holding
	For transformer sizing	7VA
	Auxiliary switch (-S)	1 SPDT, 1mA...3(0.5)A, AC 250V, adjustable
	Connection	- motor Cable 1m, 2x0.75mm ² - auxiliary switch (-S) Cable 1m, 3x0.75mm ²
Functional data	Torque	4Nm @ nominal voltage
	Direction of rotation	Selectable by mounting L/R
	Angle of rotation	Max. 95°, 37...100% adjustable by mechanical stops
	Running time	- motor 40...75s - spring return 20s @ -20...+50°C / max. 60s @ -30°C
	Sound power level	- motor Max. 50dB(A) - spring return Max. 62dB(A)
Safety	Position indicator	Mechanical
	Protection class	III (safety extra-low voltage)
	Degree of protection	IP54
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Ambient temp.	-30...+50°C
Dimensions / weight	Non-operation temp.	-40...+80°C
	Humidity	5...95% RH, non-condensing
	Maintenance	Maintenance-free
	Dimensions (LxWxH)	See «Dimensions»
	Shaft length	Clamp up Min. 84mm Clamp down Min. 20mm
	Shaft	8...16mm
	Weight	Approx. 1.6kg

Dimensions [mm]

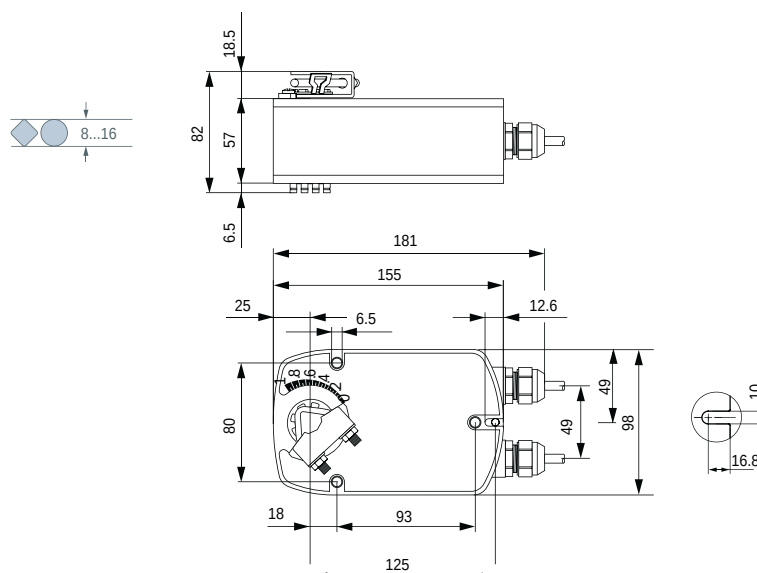

UL marked actuators is optional, please contact your local Sales Representative for details.

For operation of air control dampers that perform safety function


- Torque: 4Nm
- Nominal voltage: AC/DC 24V
- Control: 3-point



Technical data

Electrical data	Nominal voltage	AC 24V 50/60Hz, DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	2.5W @ nominal torque / 1W @ holding
	For transformer sizing	5VA
	Connection	Cable 1m, 4x0.75mm ²
Functional data	Torque	4Nm @ nominal voltage
	Direction of rotation	Selectable by mounting L/R
	Angle of rotation	Max. 95°, 37...100% adjustable by mechanical stops
	Running time	- motor 150s - spring return 20s @ -20...+50°C / max. 60s @ -30°C
	Sound power level	- motor Max. 30dB(A) - spring return Max. 62dB(A)
Safety	Position indicator	Mechanical
	Protection class	III (safety extra-low voltage)
	Degree of protection	IP54
	EMC	CE according to 2004/108/EC
	Low voltage directive	CE according to 2006/95/EC
	Ambient temp.	-30...+50°C
	Non-operation temp.	-40...+80°C
	Humidity	5...95% RH, non-condensing
	Maintenance	Maintenance-free
	Dimensions (LxWxH)	See «Dimensions»
Dimensions / weight	Shaft length	Clamp up Min. 84mm Clamp down Min. 20mm
	Shaft	8...16mm
	Weight	Approx. 1.4kg

Dimensions [mm]

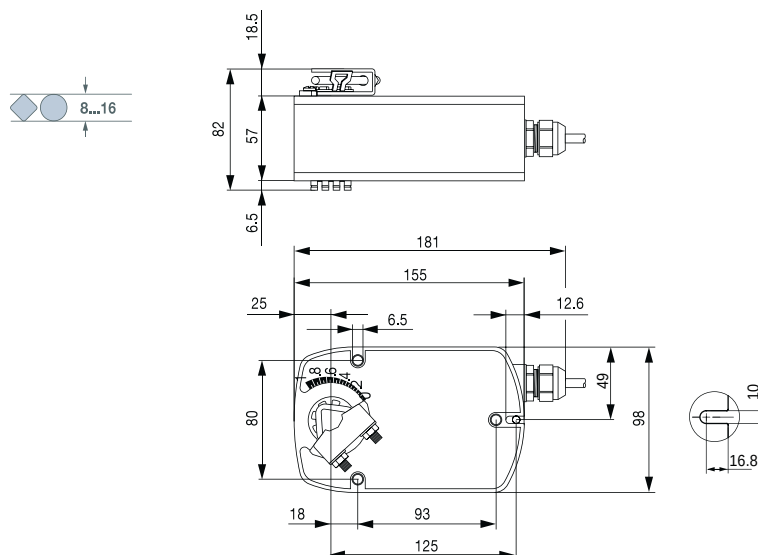

For operation of air control dampers that perform safety function


- Torque: 4Nm
- Nominal voltage: AC/DC 24V
- Control signal: DC (0)2...10V
- Position feedback: DC 2...10V



Technical data

Electrical data	Nominal voltage	AC 24V 50/60Hz, DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	2.5W @ nominal torque / 1W @ holding
	For transformer sizing	5VA
Functional data	Connection	Cable 1m, 4x0.75mm ²
	Torque	4Nm @ nominal voltage
	Control signal Y	DC (0)2...10V @ input impedance 100kΩ
	Position feedback signal U	DC 2...10V @ max. 0.7mA
	Direction of rotation	Selectable by L/R switch Selectable by L/R mounting
	Angle of rotation	Max. 95°, 37...100% adjustable by mechanical stops
	Running time	- motor 150s - spring return 20s @ -20...+50°C / max. 60s @ -30°C
	Sound power level	- motor Max. 30dB(A) - spring return Max. 62dB(A)
	Position indicator	Mechanical
	Protection class	III (safety extra-low voltage)
Safety	Degree of protection	IP54
	EMC	CE according to 2004/108/EC
	Mode of operation	Type 1.AA (EN 60730-1)
	Ambient temp.	-30...+50°C
	Non-operation temp.	-40...+80°C
	Humidity	5...95% RH, non-condensing
	Maintenance	Maintenance-free
	Dimensions (LxWxH)	See «Dimensions»
	Shaft length	Clamp up Min. 84mm Clamp down Min. 20mm
	Shaft	⌀ 8...16mm
Dimensions / weight	Weight	Approx. 1.6kg

Dimensions [mm]

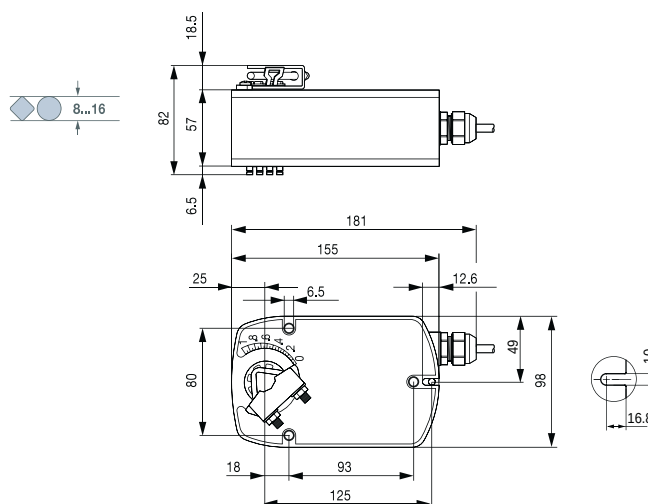

For operation of air control dampers that perform safety function


- Torque: 4Nm
- Nominal voltage: AC 230V
- Control: Open/Close
- Integrated auxiliary switch (LF230-S)



Technical data

Electrical data	Nominal voltage	AC 230V 50/60Hz
	Nominal voltage range	AC 198...264V
	Power consumption	5W @ nominal torque / 3W @ holding
	For transformer sizing	7VA
Functional data	Auxiliary switch (-S)	1 SPDT, 1mA...3(0.5)A, AC 250V, adjustable
	Connecting cable	-motor Cable 1m, 2x0.75mm ² -auxiliary switch (-S) Cable 1m, 3x0.75mm ²
	Torque	4Nm @ nominal voltage
	Direction of rotation	Selectable by mounting L/R
Safety	Angle of rotation	Max. 95°, 37...100% adjustable by mechanical stops
	Running time	- motor 40...75s - spring return 20s @ -20...+50°C / max. 60s @ -30°C
	Sound power level	- motor Max. 50dB(A) - spring return Max. 62dB(A)
	Position indicator	Mechanical
Dimensions / weight	Protection class	II (Totally insulated)
	Degree of protection	IP54
	EMC Low voltage directive	CE according to 2004/108/EC CE according to 2006/95/EC
	Ambient temp. / Non-operation temp.	-30...+50°C -40...+80°C
	Humidity	5...95% RH, non-condensing
	Maintenance	Maintenance-free
	Dimensions (LxWxH)	See «Dimensions»
	Shaft length	Clamp up Min. 84mm Clamp down Min. 20mm
	Shaft	8...16mm
	Weight	Approx. 1.8kg

Dimensions [mm]

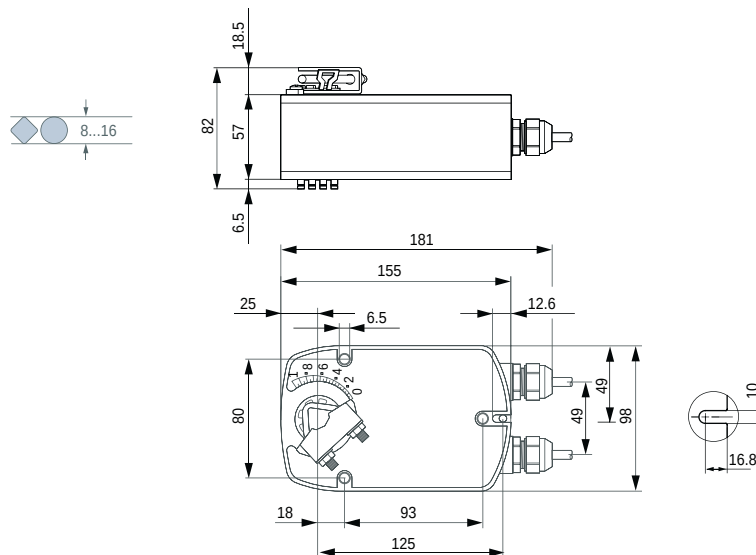

Spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- Torque 10Nm
- Nominal voltage AC 24...240V / DC 24...125V
- Control: Open-close



Technical data

Electrical data	Nominal voltage	AC 24...240V, 50/60Hz / DC 24...125V
	Nominal voltage range	AC 19.2...264V / DC 21.6...137.5V
	Power consumption	In operation 6W @ nominal torque At rest 2.5W For wire sizing 9.5VA
Functional data	Connection	Cable 1m, 2 x 0.75mm ²
	Torque	Motor Min. 10Nm @ nominal voltage Spring return Min. 10Nm
	Direction of rotation	Can be selected by mounting L / R
	Manual override	With hand crank and interlocking switch
	Angle of rotation	Max. 95°<, can be limited with adjustable mechanical end stop
	Running time	Motor ≤75s (0...10Nm) Spring return 20s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor ≤45dB(A) Spring return ≤62dB(A)
	Service life	Min. 60,000 emergency positions
	Position indication	Mechanical
	Position indication	Mechanical
Safety	Protection class	II Totally insulated ☒
	Degree of protection	IP54 NEMA2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Low-voltage directive	CE according to 2006/95/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1.AA
	Rated impulse voltage	4kV
	Control pollution degree	3
	Ambient temperature	-30...+50°C
	Non-operating temperature	-40...+80°C
Dimensions / Weight	Ambient humidity	95% r.h., non-condensating
	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 2.1kg

Dimensions [mm]

Dimensional drawings

Variant 1a:

¾"-spindle clamp (with insertion part) EU Standard

Damper spindle	Length			
	≥85	10...22	10	14...25.4
	≥15			

Variant 1b:


1"-spindle clamp (without insertion part) EU Standard

Damper spindle	Length		
	≥85	19...25.4 (26.7)	12...18
	≥15		

Variant 2:

½"-spindle clamp (optional via configuration)

Damper spindle	Length		
	≥85	10...19	14...20
	≥15		

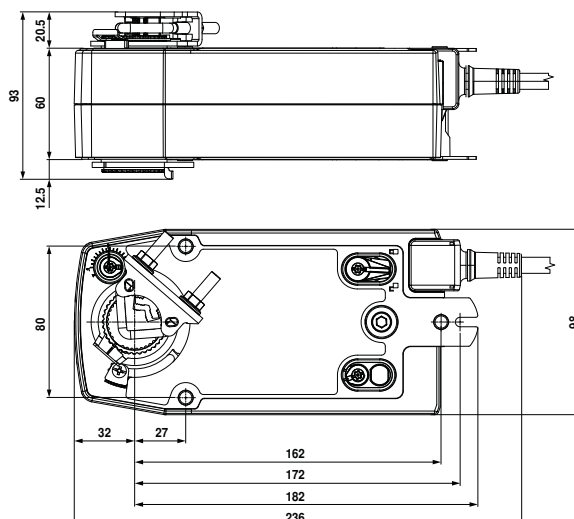

Spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- Torque 10Nm
- Nominal voltage AC 24...240V / DC 24...125V
- Control: Open-close
- Two integrated auxiliary switches



Technical data

Electrical data	Nominal voltage	AC 24...240V, 50/60Hz / DC 24...125V
	Nominal voltage range	AC 19.2...264V / DC 21.6...137.5V
	Power consumption	In operation 6W @ nominal torque At rest 2.5W For wire sizing 9.5VA
	Auxiliary switch	2 x SPDT, 1 x 10% / 1 x 11...90%
Functional data	Connection	Motor Cable 1m, 2 x 0.75mm ² Auxiliary switch Cable 1m, 6 x 0.75mm ²
	Torque	Motor Min. 10Nm @ nominal voltage Spring return Min. 10Nm
	Direction of rotation	Can be selected by mounting L / R
	Manual override	With hand crank and interlocking switch
	Angle of rotation	Max. 95°<, can be limited with adjustable mechanical end stop
	Running time	Motor ≤75s (0...10Nm) Spring return 20s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor ≤45dB(A) Spring return ≤62dB(A)
	Service life	Min. 60,000 emergency positions
	Position indication	Mechanical
	Safety	Protection class II Totally insulated ☒
		Degree of protection IP54 NEMA2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Low-voltage directive	CE according to 2006/95/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1.AA.B
	Rated impulse voltage	Actuator 4kV Auxiliary switch 2.5kV
	Control pollution degree	3
	Ambient temperature	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity	95% r.h., non-condensating
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 2.3kg

Dimensions [mm]

Dimensional drawings

Variant 1a:
¾"-spindle clamp (with insertion part) EU Standard


Damper spindle	Length			
	≥85	10 ... 22	10	14 ... 25.4
	≥15			

Variant 1b:
1"-spindle clamp (without insertion part) EU Standard

Damper spindle	Length		
	≥85	19 ... 25.4 (26.7)	12 ... 18
	≥15		

Variant 2:
¾"-spindle clamp (optional via configuration)

Damper spindle	Length		
	≥85	10 ... 19	14 ... 20
	≥15		

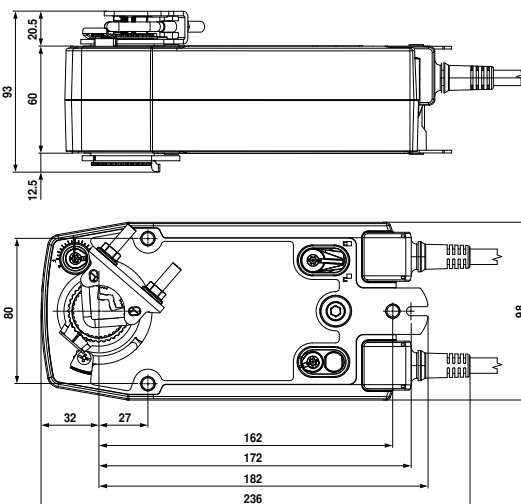

Modulating spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- Torque 10Nm
- Nominal voltage AC/DC 24V
- Control: modulating DC 0...10V
- Position feedback DC 2...10V



Type overview

Electrical data	Nominal voltage		AC 24V, 50/60Hz / DC 24V
	Nominal voltage range		AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation	3.5W @ nominal torque
		At rest	2.5W
Functional data	For wire sizing		5.5VA
	Connection		Cable 1m, 4 x 0.75mm ²
	Torque	Motor	Min. 10Nm @ nominal voltage
		Spring return	Min. 10Nm
	Control	Control signal Y	DC 0...10V, input impedance 100kΩ
		Operating range	DC 2...10V
	Position feedback (measuring voltage U)		DC 2...10V, max. 0.5mA
	Position accuracy		±5%
	Direction of rotation	Motor	Reversible with switch ↺ / ↻
		Spring return	Can be selected by mounting L / R
	Manual override		With hand crank and interlocking switch
	Angle of rotation		Max. 95°↺, can be limited with adjustable mechanical end stop
	Running time	Motor	≤150s (0...10Nm)
		Spring return	≤20s @ -20...50°C / max. 60s @ -30°C
Safety	Sound power level	Motor	≤40dB(A) @ 150s running time
		Spring return	≤62dB(A)
	Service life		Min. 60,000 emergency positions
	Position indication		Mechanical
	Protection class		III Extra low voltage
			UL Class 2 Supply
	Degree of protection		IP54
	NEMA2, UL Enclosure Type 2		
	EMC		CE according to 2004/108/EC
	Certification		Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation		Type 1.AA
	Rated impulse voltage		0.8kV
	Control pollution degree		3
Dimensions / Weight	Ambient temperature		-30...+50°C
	Non-operating temperature		-40...+80°C
	Ambient humidity		95% r.h., non-condensating
	Maintenance		Maintenance-free
	Dimensions		See «Dimensions»
	Weight		Approx. 2.1kg

Dimensions [mm]

Dimensional drawings

Variant 1a:
¾"-spindle clamp (with insertion part) EU Standard


Damper spindle	Length	● I	■ I	◆ I
	≥85	10...22	10	14...25.4
	≥15			

Variant 1b:
1"-spindle clamp (without insertion part) EU Standard

Damper spindle	Length	● I	■ I
	≥85	19...25.4 (26.7)	12...18
	≥15		

Variant 2:
¾"-spindle clamp (optional via configuration)

Damper spindle	Length	● I	◆ I
	≥85	10...19	14...20
	≥15		

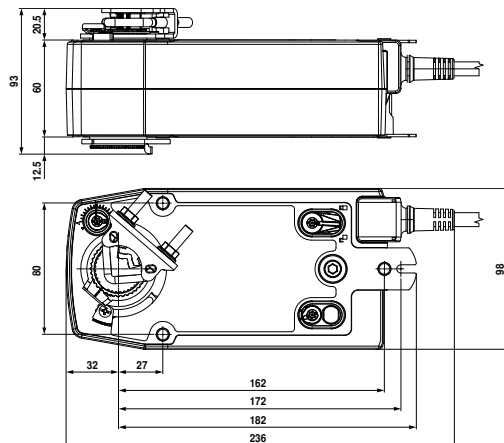

Spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- Torque 20Nm
- Nominal voltage AC 24...240V / DC 24...125V
- Control: Open-close



Type overview

Electrical data	Nominal voltage	AC 24...240V, 50/60Hz / DC 24...125V
	Nominal voltage range	AC 19.2...264V / DC 21.6...137.5V
	Power consumption	In operation 7W @ nominal torque At rest 3.5W For wire sizing 18VA
	Connection	Cable 1m, 2 x 0.75mm ²
Functional data	Torque	Motor Min. 20Nm @ nominal voltage Spring return Min. 20Nm
	Direction of rotation	Can be selected by mounting L / R
	Manual override	With hand crank and interlocking switch
	Angle of rotation	Max. 95°<, can be limited with adjustable mechanical end stop
	Running time	Motor ≤75s (0...10Nm) Spring return 20s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor ≤45dB(A) Spring return ≤62dB(A)
	Service life	Min. 60,000 emergency positions
	Position indication	Mechanical
	Safety	Protection class II Totally insulated ☒ Degree of protection IP54 NEMA2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC CE according to 2006/95/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1.AA
	Rated impulse voltage	4kV
	Control pollution degree	3
	Ambient temperature	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity	95% r.h., non-condensating
	Maintenance	Maintenance-free
	Dimensions / Weight	Dimensions See «Dimensions» Weight Approx. 2.3kg

Dimensions [mm]

Dimensional drawings

Variant 1a:

¾"-spindle clamp (with insertion part) EU Standard

Damper spindle	Length			
	≥85	10...22	10	14...25.4
	≥15			

Variant 1b:


1"-spindle clamp (without insertion part) EU Standard

Damper spindle	Length		
	≥85	19...25.4 (26.7)	12...18
	≥15		

Variant 2:

½"-spindle clamp (optional via configuration)

Damper spindle	Length		
	≥85	10...19	14...20
	≥15		

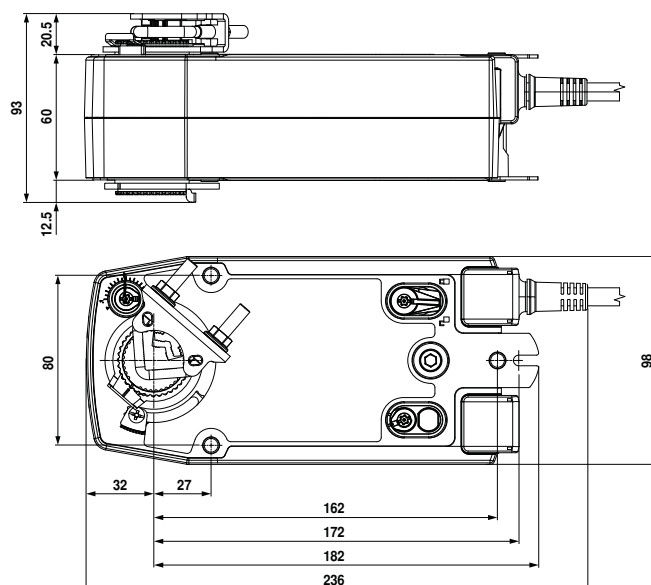

Spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- Torque 20Nm
- Nominal voltage AC 24...240V / DC 24...125V
- Control: Open-close
- Two integrated auxiliary switches



Technical data

Electrical data	Nominal voltage		AC 24...240V, 50/60Hz / DC 24...125V
	Nominal voltage range		AC 19.2...264V / DC 21.6...137.5V
	Power consumption	In operation	7W @ nominal torque
		At rest	3.5W
Functional data	For wire sizing		18VA
	Auxiliary switch		2 x SPDT, 1 x 10% / 1 x 11...90%
	Connection	Motor	Cable 1m, 2 x 0.75mm ²
		Auxiliary switch	Cable 1m, 6 x 0.75mm ²
Safety	Torque	Motor	Min. 20Nm @ nominal voltage
		Spring return	Min. 20Nm
	Direction of rotation		Can be selected by mounting L / R
	Manual override		With hand crank and interlocking switch
	Angle of rotation		Max. 95°↺, can be limited with adjustable mechanical end stop
	Running time	Motor	≤75s (0...20Nm)
		Spring return	20s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor	≤45dB(A)
		Spring return	≤62dB(A)
	Service life		Min. 60,000 emergency positions
	Position indication		Mechanical
	Protection class		II Totally insulated ☐
	Degree of protection		IP54 NEMA2, UL Enclosure Type 2
	EMC		CE according to 2004/108/EC
	Low-voltage directive		CE according to 2006/95/EC
	Certification		Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
Dimensions / Weight	Mode of operation		Type 1.AA.B
	Rated impulse voltage	Actuator	4kV
		Auxiliary switch	2.5kV
	Control pollution degree		3
	Ambient temperature		-30...+50°C
	Non-operating temperature		-40...+80°C
	Ambient humidity		95% r.h., non-condensating
	Maintenance		Maintenance-free
	Dimensions		See «Dimensions»
	Weight		Approx. 2.4kg

Dimensions [mm]

Dimensional drawings

Variant 1a:
¾"-spindle clamp (with insertion part) EU Standard


Damper spindle	Length			
	≥85	10...22	10	14...25.4
	≥15			

Variant 1b:
1"-spindle clamp (without insertion part) EU Standard

Damper spindle	Length		
	≥85	19...25.4 (26.7)	12...18
	≥15		

Variant 2:
½"-spindle clamp (optional via configuration)

Damper spindle	Length		
	≥85	10...19	14...20
	≥15		

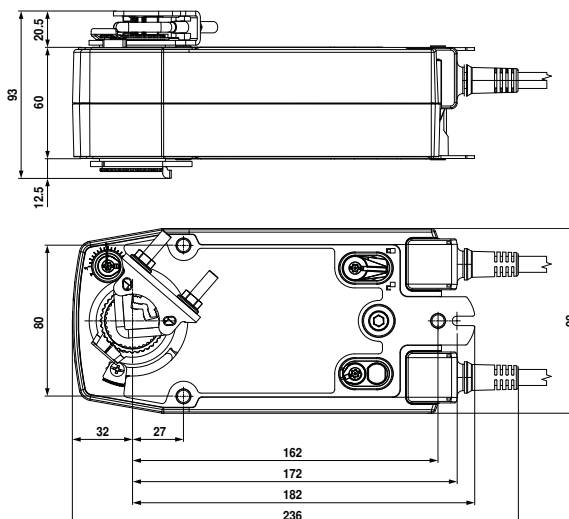

Modulating spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- Torque 20Nm
- Nominal voltage AC/DC 24V
- Control: modulating DC (0)2...10V
- Position feedback DC 2...10V



Technical data

Electrical data	Nominal voltage		AC 24V, 50/60Hz / DC 24V	
	Nominal voltage range		AC 19.2...28.8V / DC 21.6...28.8V	
	Power consumption	In operation	5W @ nominal torque	
		At rest	3W	
		For wire sizing	7VA	
	Connection		Cable 1m, 4 x 0.75mm ²	
Functional data	Torque	Motor	Min. 20Nm @ nominal voltage	
		Spring return	Min. 20Nm	
	Control	Control signal Y	DC (0) 2...10V, input impedance 100kΩ	
		Operating range	DC 2...10V	
	Position feedback (measuring voltage U)		DC 2...10V, max. 0.5mA	
	Position accuracy		±5%	
	Direction of rotation	Motor	Reversible with switch 	
		Spring return	Can be selected by mounting L / R	
	Manual override		With hand crank and interlocking switch	
	Angle of rotation		Max. 95°↺, can be limited with adjustable mechanical end stop	
	Running time	Motor	≤150s (0...20Nm)	
		Spring return	≤20s @ -20...50°C / max. 60s @ -30°C	
	Sound power level	Motor	≤40dB(A) @ 150s running time	
		Spring return	≤62dB(A)	
		Service life		Min. 60,000 emergency positions
		Position indication		Mechanical
	Safety	Protection class		III Extra low voltage UL Class 2 Supply
Degree of protection		IP54 NEMA2, UL Enclosure Type 2		
EMC		CE according to 2004/108/EC		
Certification		Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02		
Mode of operation		Type 1.AA		
Rated impulse voltage		0.8kV		
Control pollution degree		3		
Ambient temperature		-30...+50°C		
Non-operating temperature		-40...+80°C		
Ambient humidity		95% r.h., non-condensating		
Maintenance		Maintenance-free		
Dimensions / Weight		Dimensions		See «Dimensions»
		Weight		Approx. 2.3kg

Dimensions [mm]

Dimensional drawings

Variant 1a:
¾"-spindle clamp (with insertion part) EU Standard


Damper spindle	Length	10...22	10	14...25.4
	≥85			
	≥15			

Variant 1b:
1"-spindle clamp (without insertion part) EU Standard

Damper spindle	Length	19...25.4 (26.7)	12...18
	≥85		
	≥15		

Variant 2:
½"-spindle clamp (optional via configuration)

Damper spindle	Length	10...19	14...20
	≥85		
	≥15		

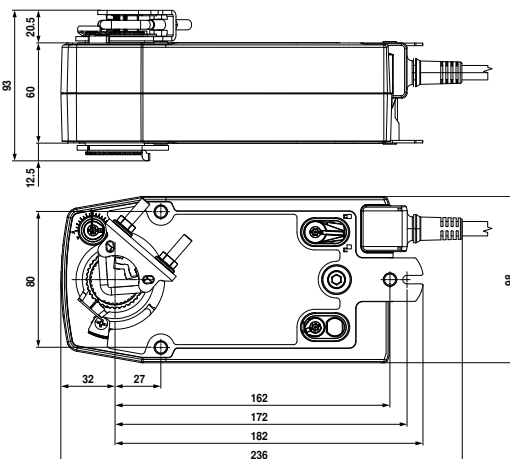

Mechanical Fail-Safe Damper Actuator EF24A-S2



Spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- Torque 30Nm
- Nominal voltage AC/DC 24V
- Control: Open-close
- Two integrated auxiliary switches





Technical data

Electrical data	Nominal voltage		AC 24V, 50/60Hz / DC 24V
	Nominal voltage range		AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation	9.5W @ nominal torque
		At rest	4.5W
		For wire sizing	16VA
Auxiliary switch		2 x SPDT, 1 x 10% / 1 x 11...90%	
Connection	Motor	Cable 1m, 2 x 0.75mm ²	
	Auxiliary switch	Cable 1m, 6 x 0.75mm ²	
Functional data	Torque	Motor	Min. 30Nm @ nominal voltage
		Spring return	Min. 30Nm
	Direction of rotation		Can be selected by mounting L / R
	Manual override		With hand crank and interlocking switch
	Angle of rotation		Max. 95°↔, can be limited with adjustable mechanical end stop
	Running time	Motor	≤75s (0...30Nm)
		Spring return	≤20s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor	≤55dB(A)
		Spring return	≤71dB(A)
	Service life		Min. 60,000 emergency positions
	Position indication		Mechanical
Safety	Protection class		III Extra low voltage UL Class 2 Supply
	Degree of protection		IP54 NEMA2, UL Enclosure Type 2
	EMC		CE according to 2004/108/EC
	Low-voltage directive		CE according to 2006/95/EC
	Certification		Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation		Type 1.AA.B
	Rated impulse voltage	Actuator	0.8kV
		Auxiliary switch	2.5kV
	Control pollution degree		3
	Ambient temperature		-30...+50°C
	Non-operating temperature		-40...+80°C
	Ambient humidity		95% r.h., non-condensating
	Maintenance		Maintenance-free
	Dimensions / Weight	Dimensions	
Weight		Approx. 4.4kg	

Dimensions [mm]

Dimensional drawings

Damper spindle	Length	●	■	◆
	≥117	12...26.7	>12	< 25.2
	≥20	12...26.7	>12	< 25.2

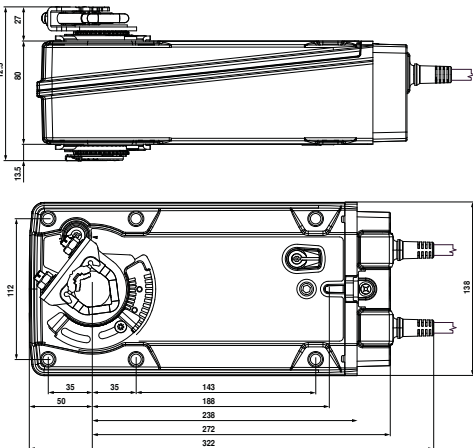

Modulating spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- Torque 30Nm
- Nominal voltage AC/DC 24V
- Control: modulating DC (0)2...10V
- Position feedback DC 2...10V





Technical data

Electrical data	Nominal voltage		AC 24V, 50/60Hz / DC 24V	
	Nominal voltage range		AC 19.2...28.8V / DC 21.6...28.8V	
	Power consumption	In operation	7W @ nominal torque	
		At rest	4.5W	
	For wire sizing		12VA	
	Connection		Cable 1m, 4 x 0.75mm ²	
Functional data	Torque	Motor	Min. 30Nm @ nominal voltage	
		Spring return	Min. 30Nm	
	Control	Control signal Y	DC (0)2...10V, input impedance 100kΩ	
		Operating range	DC 2...10V	
	Position feedback (measuring voltage U)		DC 2...10V, max. 0.5mA	
	Position accuracy		±5%	
	Direction of rotation	Motor	Reversible with switch 	
		Spring return	Can be selected by mounting L / R	
	Manual override		With hand crank and interlocking switch	
	Angle of rotation		Max. 95°↺, can be limited with adjustable mechanical end stop	
	Running time	Motor	150s (0...30Nm)	
		Spring return	≤20s @ -20...50°C / max. 60s @ -30°C	
	Sound power level	Motor	≤45dB(A) @ 150s running time	
		Spring return	≤71dB(A)	
		Service life		Min. 60,000 emergency positions
		Position indication		Mechanical
	Safety	Protection class		III Extra low voltage UL Class 2 Supply
Degree of protection		IP54 NEMA2, UL Enclosure Type 2		
EMC		CE according to 2004/108/EC		
Certification		Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02		
Mode of operation		Type 1.AA		
Rated impulse voltage		0.8kV		
Control pollution degree		3		
Ambient temperature		-30...+50°C		
Non-operating temperature		-40...+80°C		
Ambient humidity		95% r.h., non-condensating		
Maintenance		Maintenance-free		
Dimensions / Weight		Dimensions		See «Dimensions»
		Weight		Approx. 5.3kg

Dimensions [mm]

Dimensional drawings

Damper spindle	Length	Ø	1	2
	≥117	12...26.7	>12	< 25.2
	≥20	12...26.7	>12	< 25.2

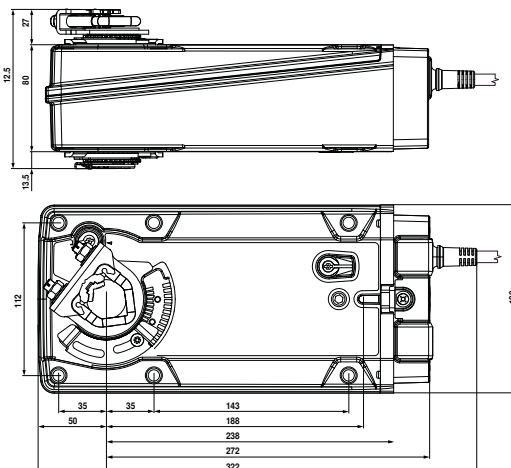

Spring return actuator with emergency function for adjusting air dampers in ventilation and air conditioning systems in buildings

- Torque 30Nm
- Nominal voltage AC 230V
- Control: Open-close
- Two integrated auxiliary switches





Technical data

Electrical data	Nominal voltage	AC 230V, 50/60Hz
	Nominal voltage range	AC 90...264V
	Power consumption	In operation 9W @ nominal torque At rest 4.5W For wire sizing 21VA
	Auxiliary switch	2 x SPDT, 1 x 10% / 1 x 11...90%
	Connection	Motor Cable 1m, 2 x 0.75mm ² Auxiliary switch Cable 1m, 6 x 0.75mm ²
Functional data	Torque	Motor Min. 30Nm @ nominal voltage Spring return Min. 30Nm
	Direction of rotation	Can be selected by mounting L / R
	Manual override	With hand crank and interlocking switch
	Angle of rotation	Max. 95°↔, can be limited with adjustable mechanical end stop
	Running time	Motor ≤75s (0...30Nm) Spring return ≤20s @ -20...50°C / max. 60s @ -30°C
	Sound power level	Motor ≤56dB(A) Spring return ≤71dB(A)
	Service life	Min. 60,000 emergency positions
	Position indication	Mechanical
	Safety Protection class	II Totally insulated □
	Protection mode	IP54 NEMA2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Low-voltage directive	CE according to 2006/95/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1.AA.B
	Rated impulse voltage	Actuator 2.5kV Auxiliary switch 2.5kV
	Control pollution degree	3
	Ambient temperature	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity	95% r.h., non-condensating
	Maintenance	Maintenance-free
Dimensions / Weight	Dimensions	See «Dimensions»
	Weight	Approx. 5.4kg

Dimensions [mm]

Dimensional drawings

Damper spindle	Length	● I	■ I	◆ I
	≥117	12...26.7	>12	< 25.2
	≥20	12...26.7	>12	< 25.2

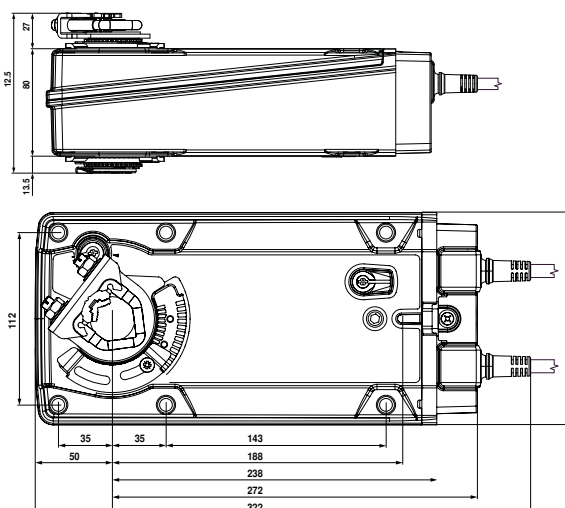

SuperCap rotary actuator with emergency setting function and extended functionalities for adjusting air dampers in ventilation and air-conditioning systems for building services installations and in laboratories

- Torque 40Nm
- Nominal voltage AC/DC 24V
- Control: Open-close
- Design life SuperCaps 15 years





Technical data

Electrical data	Nominal voltage	AC 24V, 50/60Hz / DC 24V
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation: 11W @ nominal torque At rest: 3W
	For wire sizing	21VA (I _{max} 20A @ 5ms)
	Connection	Cable 1m, 3 x 0.75mm ²
	Parallel operation	Yes (note the performance data)
Functional data	Torque	≥40Nm
	Inhibiting torque	≥40Nm
	Setting emergency position (POP)	0...100%, adjustable (POP rotary button) of maximum angle of rotation
	Bridging time with voltage interruption	2s
	Position accuracy	±5%
	Direction of rotation	Reversible with switch ↺ / ↻
	Emergency setting position	Reversible with switch 0 ... 100%
	Direction of rotation	At switch position 1 ↺ and 0 ↻, respectively
	Manual override	Gearing latch disengaged with push button
	Angle of rotation	Max. 95°↺, can be limited at both ends with adjustable mechanical end stops
	Running time Motor	150s / 90°↺
	Emergency setting position	35s @ 0...50°C
	Sound power Motor level	≤53 dB (A) @ 90 s running time ≤52 dB (A) @ 150 s running time
	Emergency setting position	≤61 dB (A)
	Position indication	Mechanical, pluggable
Safety	Protection class	III Safety extra-low voltage UL Class 2 Supply
	Degree of protection	IP54 NEMA 2, UL Enclosure Type 2
	EMC	CE according to 2004/108/EC
	Certification	Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14 cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-1:02
	Mode of operation	Type 1.AA
	Rated impulse voltage	0.8kV
	Control pollution degree	3
	Ambient temperature	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity	95% r.h., non-condensating
Dimensions / Weight	Maintenance	Maintenance-free
	Dimensions	See «Dimensions»
	Weight	Approx. 2kg

Dimensions [mm]

Dimensional drawings

Damper spindle	Length	Ø1	Ø2	Ø3
	≥52	12...26.7	≥12	≤25.5
	≥20	12...26.7	≥12	≤25.5

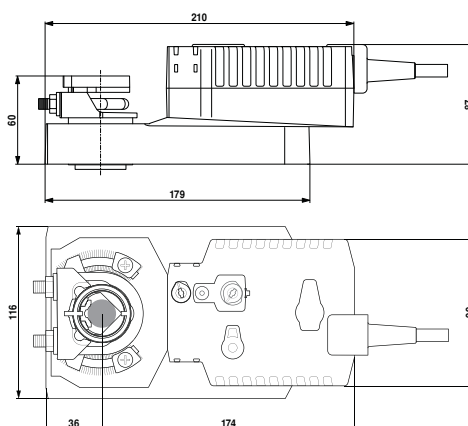

* When an auxiliary switch or a feedback potentiometer is used.

UL marked actuators is optional, please contact your local Sales Representative for details.

Parameterisable SuperCap rotary actuator with emergency setting function and extended functionalities for adjusting air dampers in ventilation and air-conditioning systems for building services installations and in laboratories

- Air damper size up to approx. 8m²
- Nominal torque 40Nm
- Nominal voltage AC/DC 24V
- Control Modulating DC (0)2...10V Variable
- Position feedback DC 2...10V Variable
- Design life SuperCaps: 15 years



Technical data

Electrical data	Nominal voltage	AC/DC 24V
	Nominal voltage frequency	50/60Hz
	Nominal voltage range	AC 19.2...28.8V / DC 21.6...28.8V
	Power consumption	In operation 11W
		At rest 3W
		For wire sizing 21VA (I _{max} 20A @ 5ms)
	Connection	Cable 1m, 3 x 0.75mm ²
	Parallel operation	Yes (note the performance data)
Functional data	Torque	Min. 40Nm
	Positioning signal Y	DC 0...10V
	Positioning signal Y note	Input impedance 100kΩ
	Control signal Y variable	Open-close
		3-point (AC only)
		Modulating (DC 0...32V)
	Position feedback U	DC 2...10V
	Position feedback U note	Max. 0.5mA
	Position feedback U variable	Start point DC 0.5...8V
		End point DC 2.5...10V
	Emergency setting position (POP)	0%, adjustable in increments of 10% (POP rotary knob on 0 corresponds to left end stop)
	Emergency setting position variable	0...100%, adjustable
	Bridging time (PF)	2s
	Bridging time (PF) variable	1...10s
	Position accuracy	±5%
	Direction of motion motor	Selectable with switch 0 / 1
	Direction of motion emergency control function	Selectable with switch 0...100%
	Direction of motion note	Y = 0V: At switch position 0 (ccw rotation) / 1 (cw rotation)
	Direction of motion variable	Electronically reversible
	Manual override	Gear disengagement with push-button
	Angle of rotation	Max. 95°
	Angle of rotation note	Can be limited on both sides with adjustable mechanical end stops
	Running time motor	150s / 90°
	Motor running time variable	90...150s
	Running time emergency control position	35s / 90°
	Adaption setting range	Manual (automatic on first power-up)
	Adaption setting range variable	No action
		Adaption when switched on
		Adaption after pushing the gear disengagement button
	Override control	MAX (maximum position) = 100%
		MIN (minimum position) = 0%
		ZS (intermediate position, AC only) = 50%
	Override control variable	MAX = (MIN + 32%)...100%
		MIN = 0%...(MAX - 32%)
		ZS = MIN...MAX
	Sound power level motor	52dB(A)
	Sound power level emergency control position	61dB(A)
	Spindle driver	Universal spindle clamp reversible 12...26.7mm
	Position indication	Mechanical, pluggable
Safety	Protection class IEC/EN	III Safety extra-low voltage
	Protection class UL	UL Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2, UL Enclosure Type 2


Technical data

Safety	EMC	CE according to 2004/108/EC
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1.AA
	Rated impulse voltage supply/control	0.8kV
	Control pollution degree	3
	Ambient temperature	-30...+50°C
	Non-operating temperature	-40...+80°C
	Ambient humidity	95% r.h., non-condensating
Weight	Maintenance	Maintenance-free
	Weight	Approx. 2.0kg
Terms	Abbreviations	POP = Power off position / emergency setting position CPO = Controlled power off / controlled emergency control function PF = Power fail delay time / bridging time


Dimensions [mm]

Dimensional drawings


Spindle length








	Min. 52
	Min. 20







Clamping range

		
	12...22	12...18
		
	22...26.7	12...18


*Option: Spindle clamp mounted below: When an auxiliary switch or a feedback potentiometer is used the adapter Z-SPA is required.

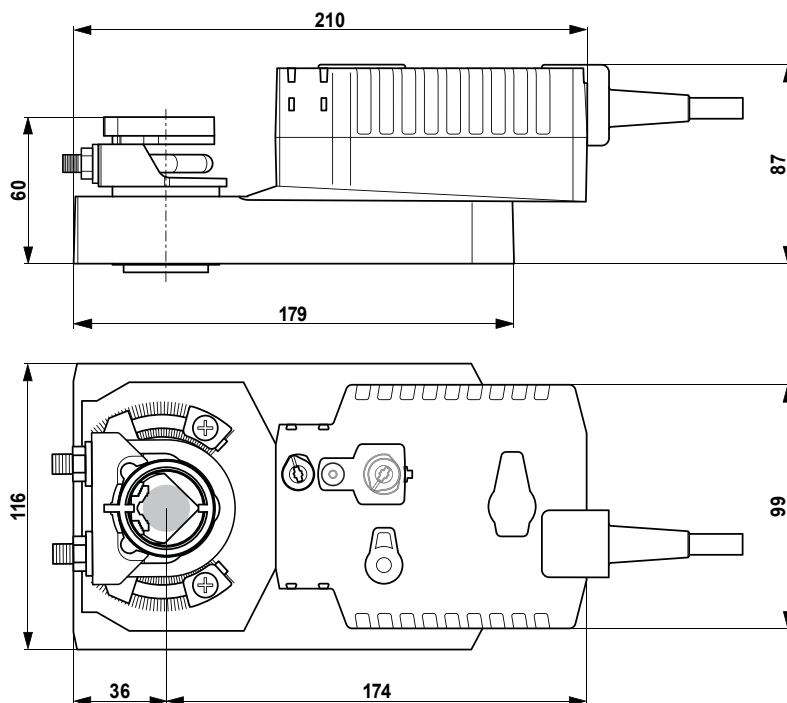

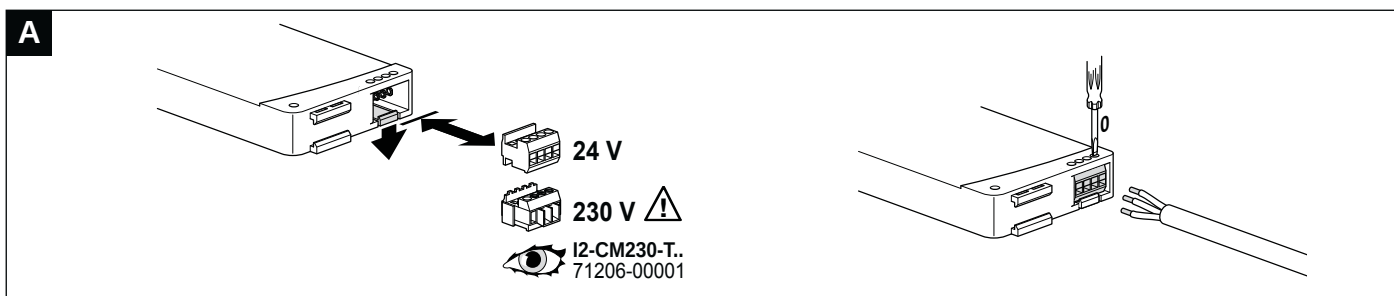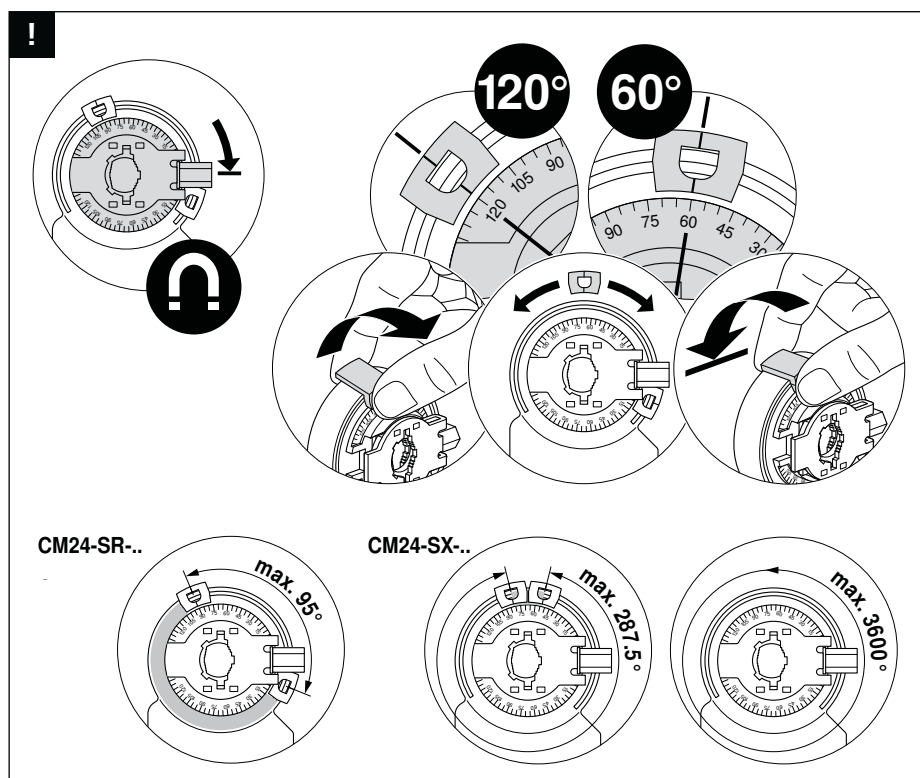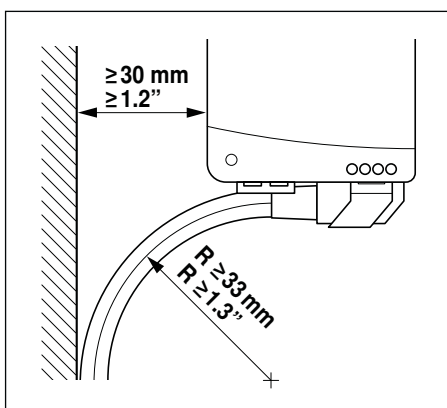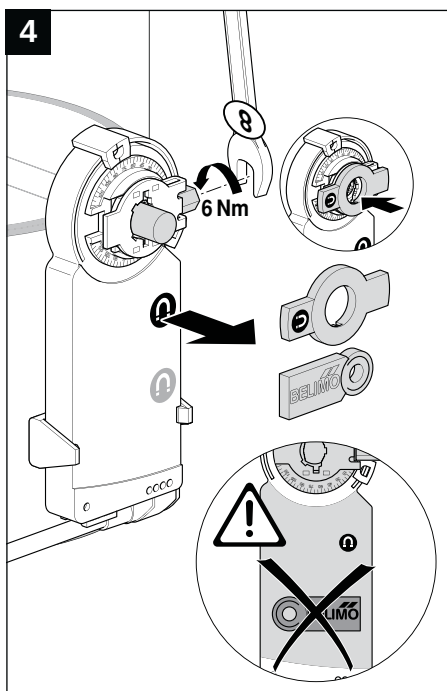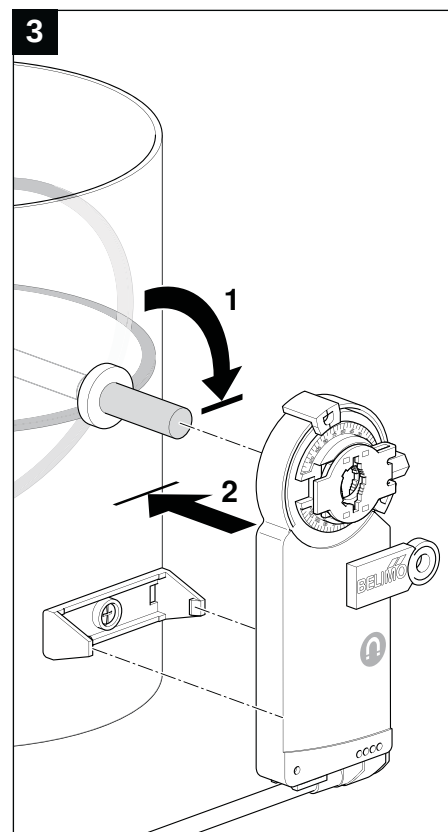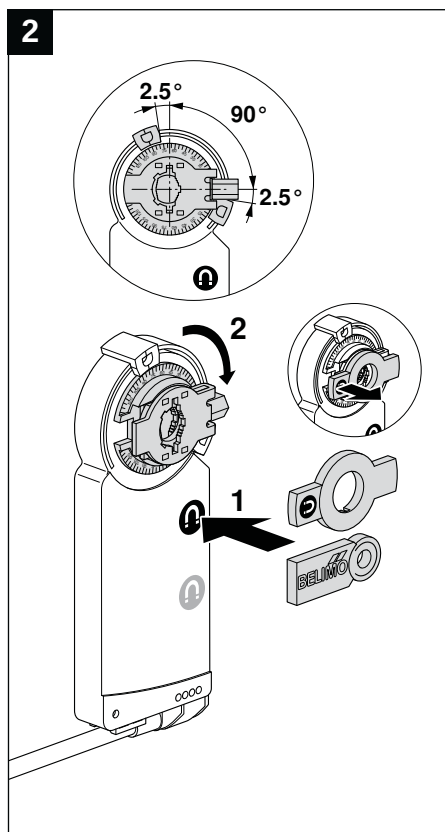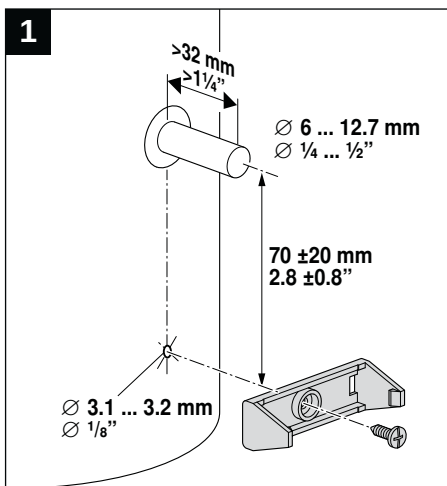

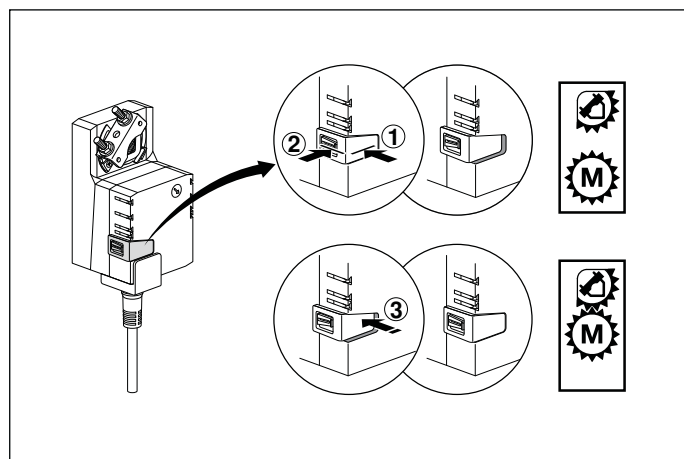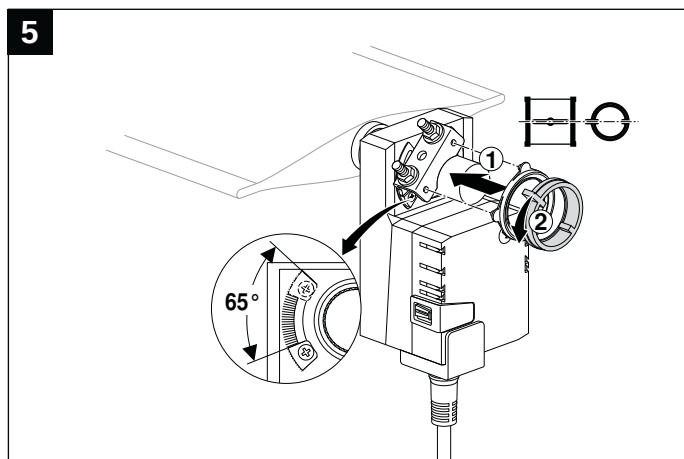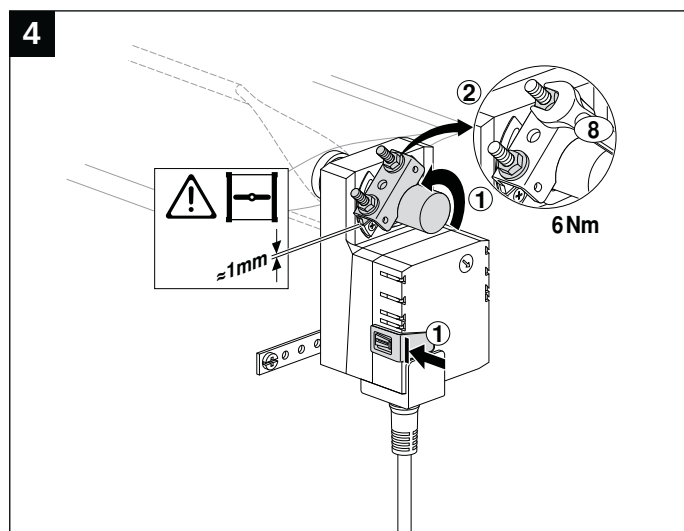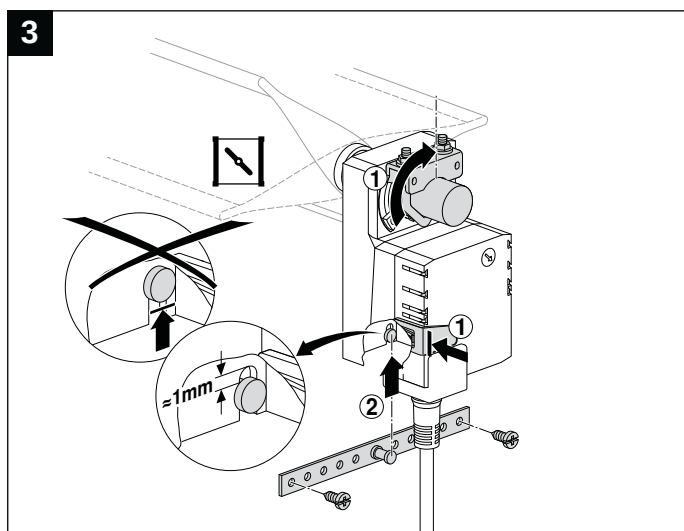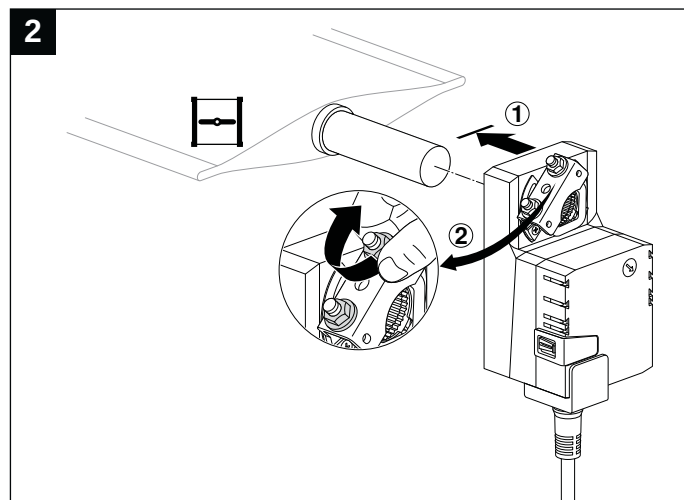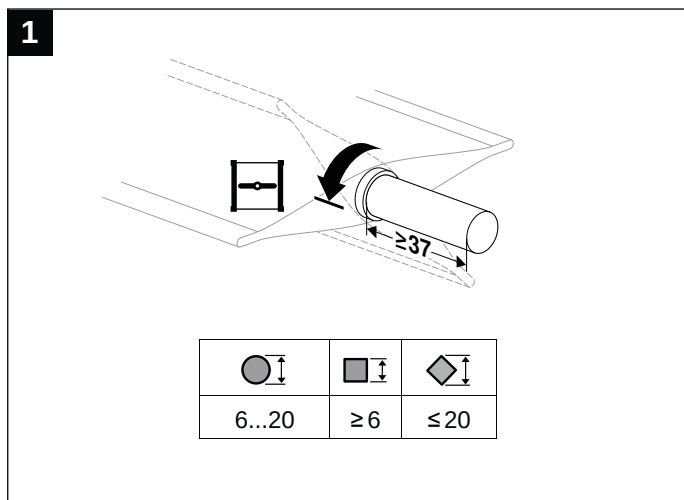


1

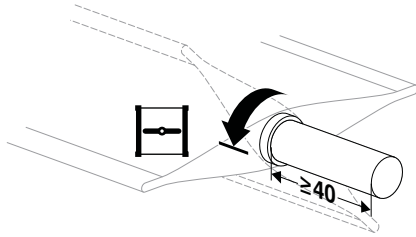


8...26.7	≥8	≤26.7


2

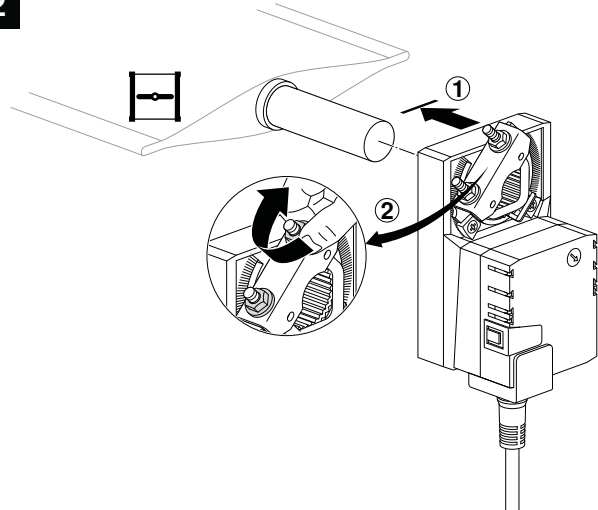



3






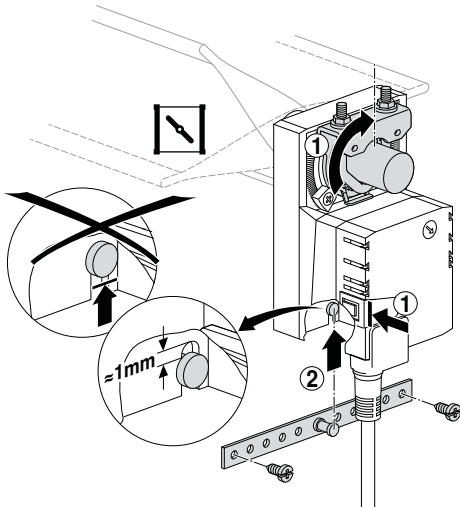










4






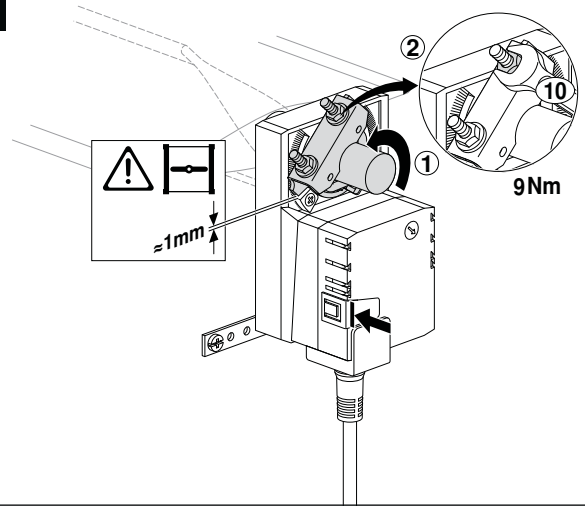










5




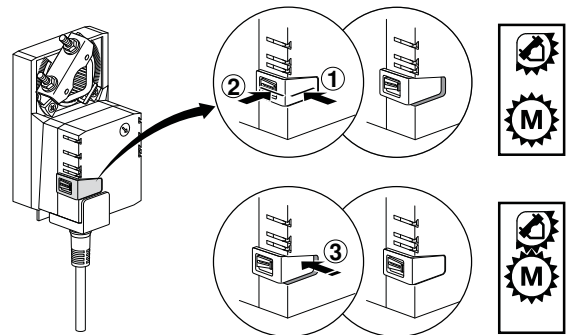
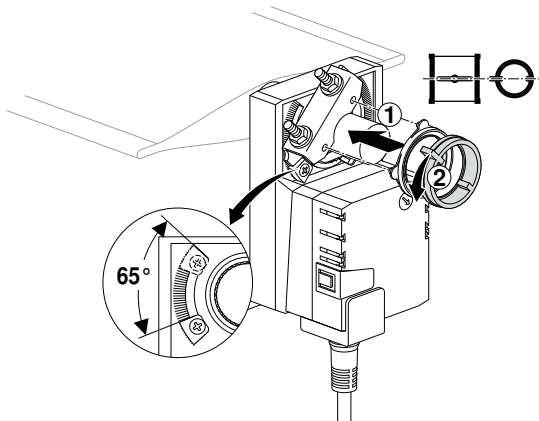




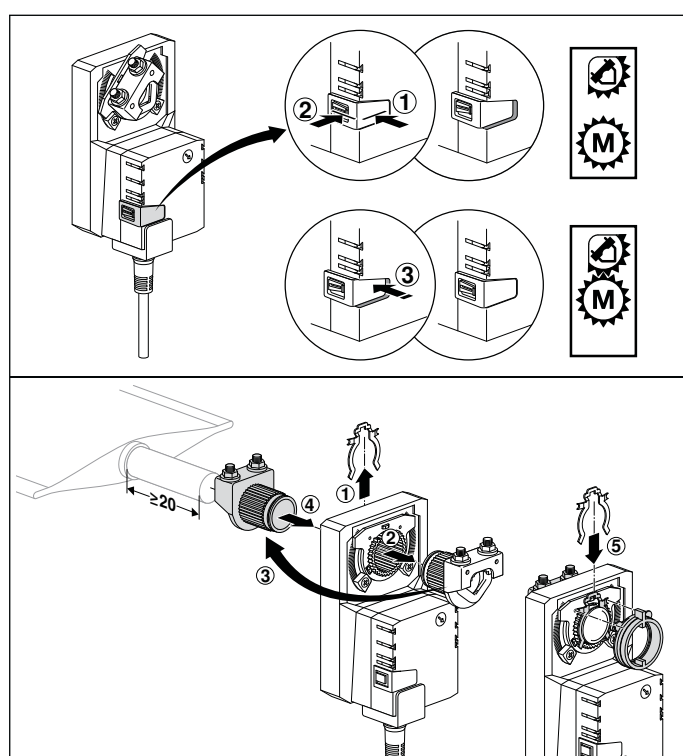
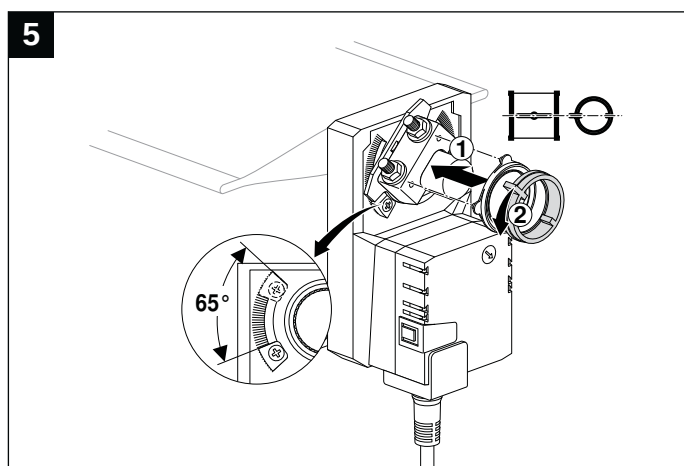
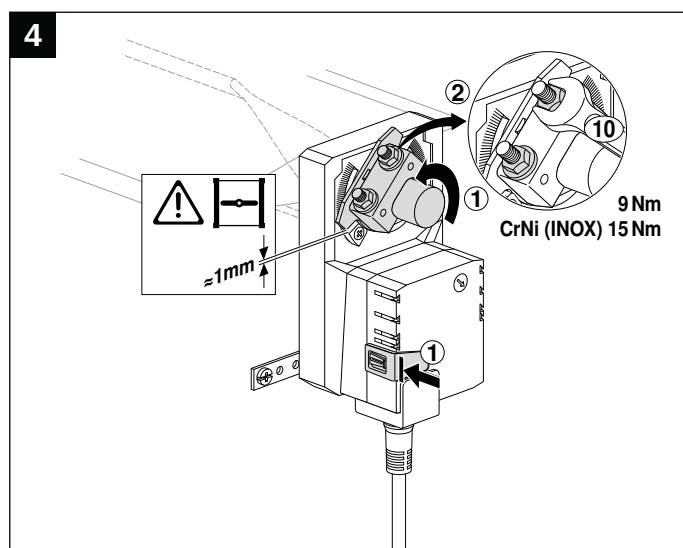
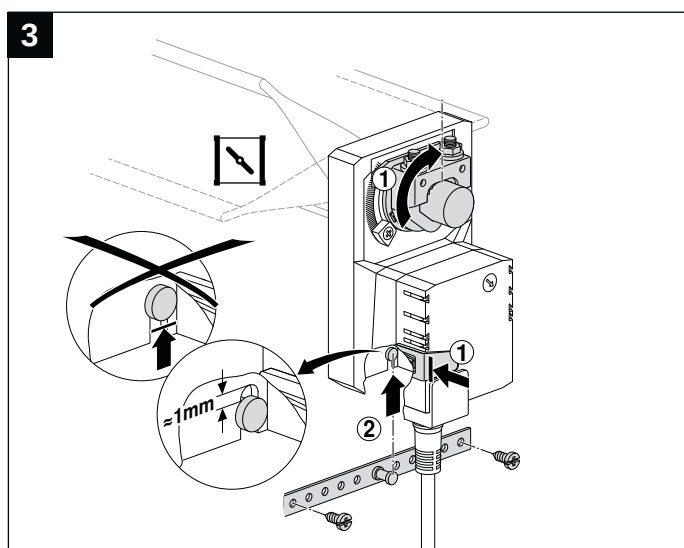
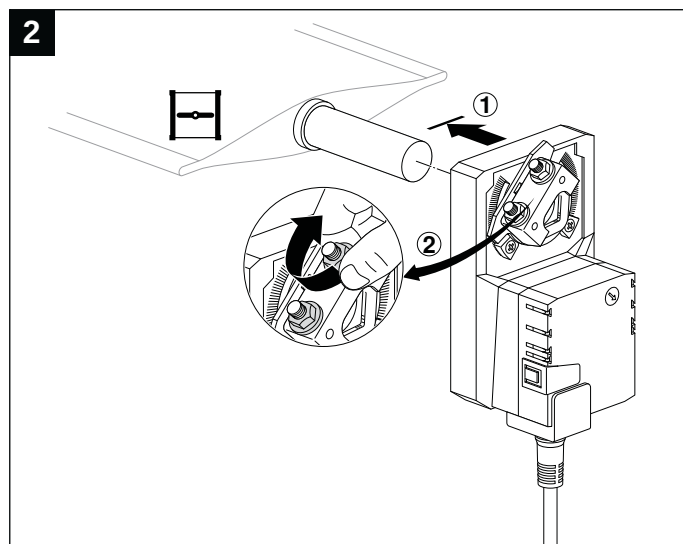
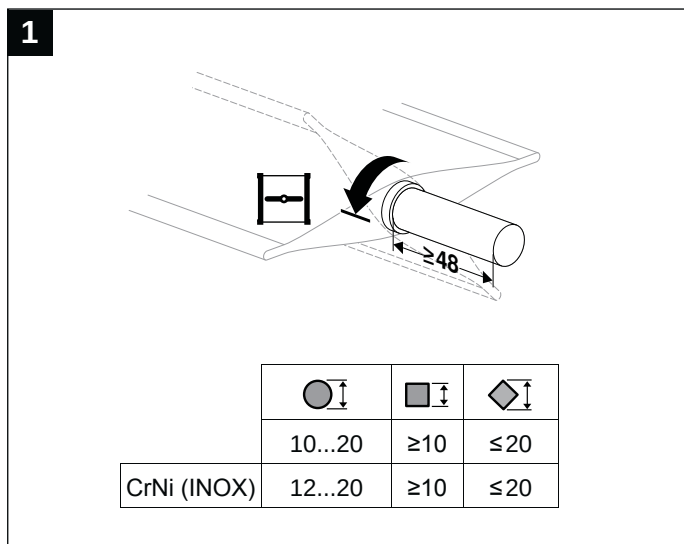



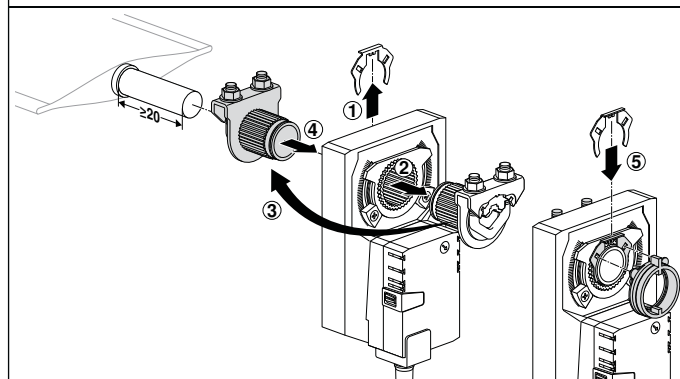
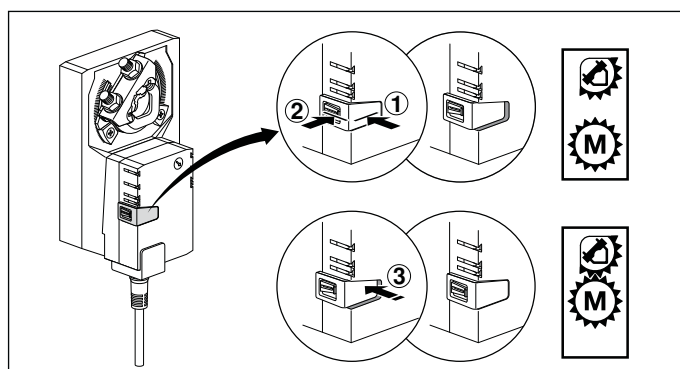
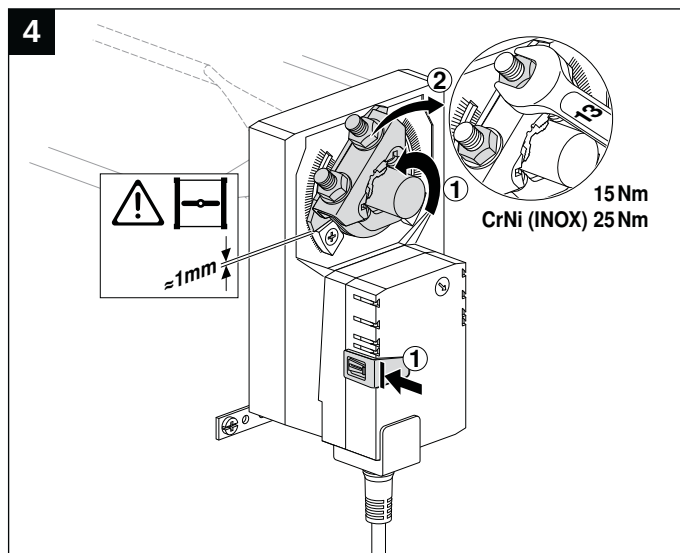
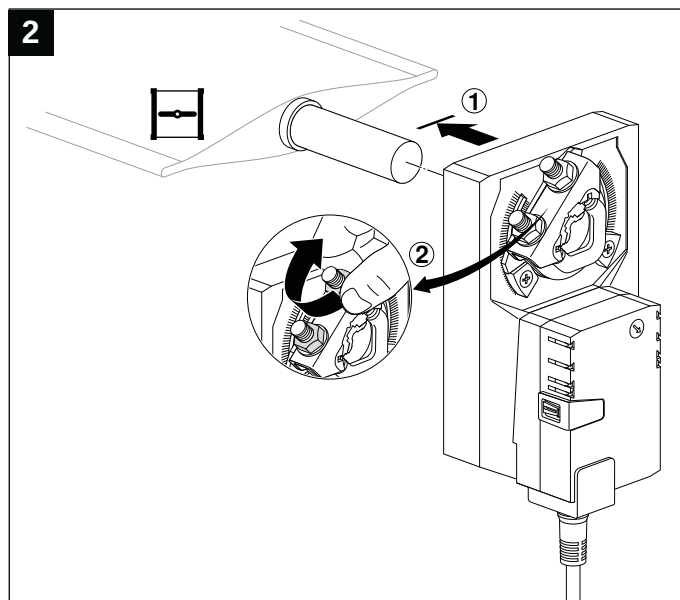
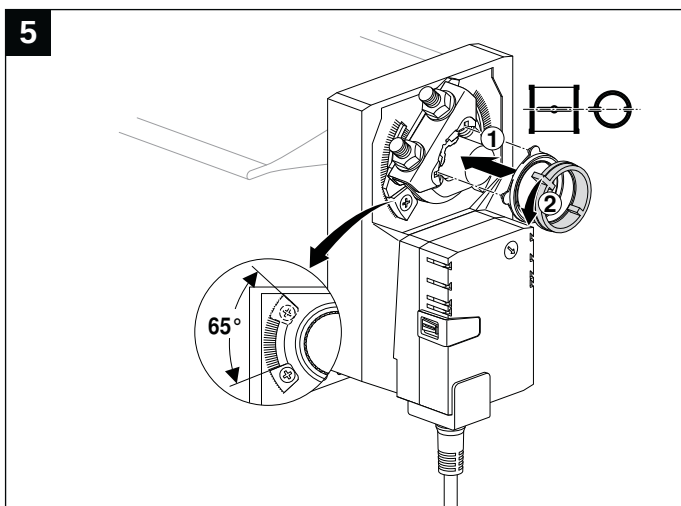
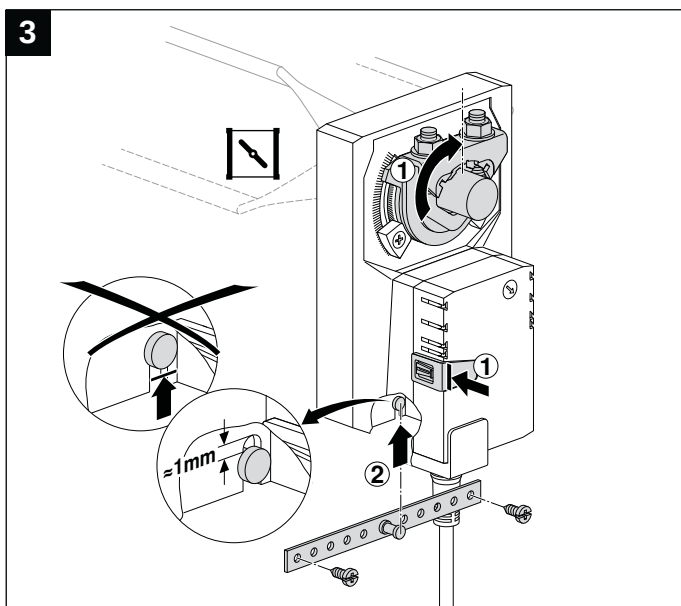
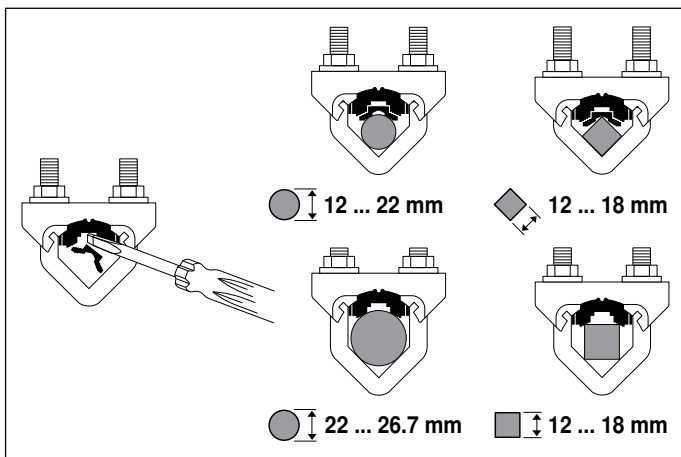
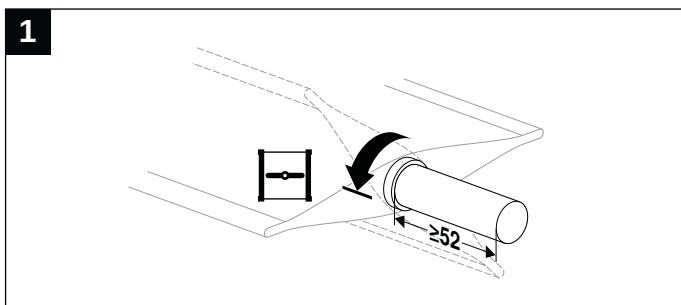


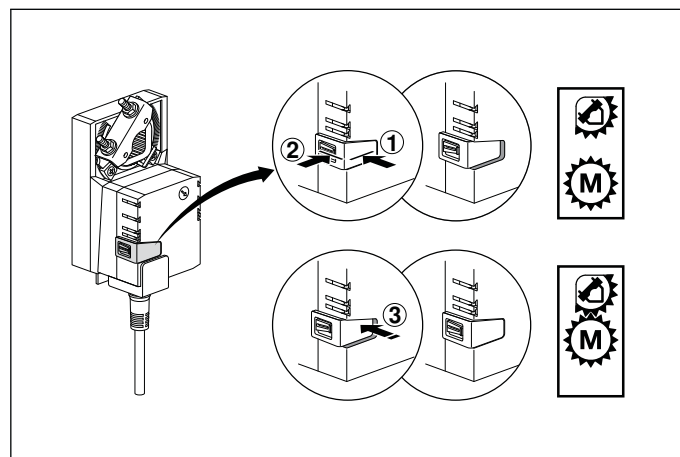
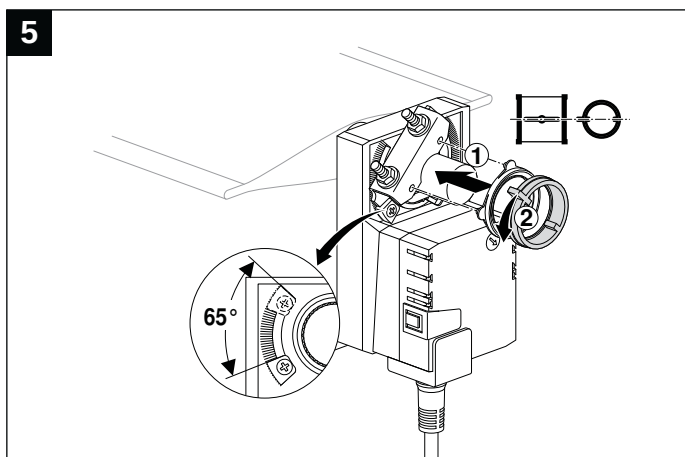
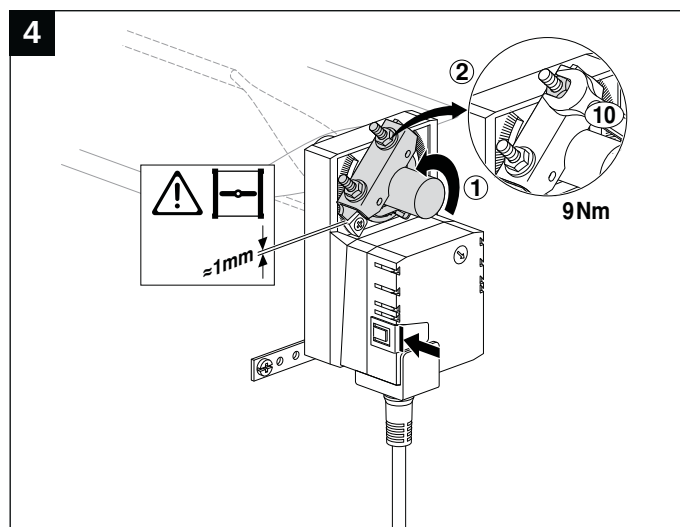
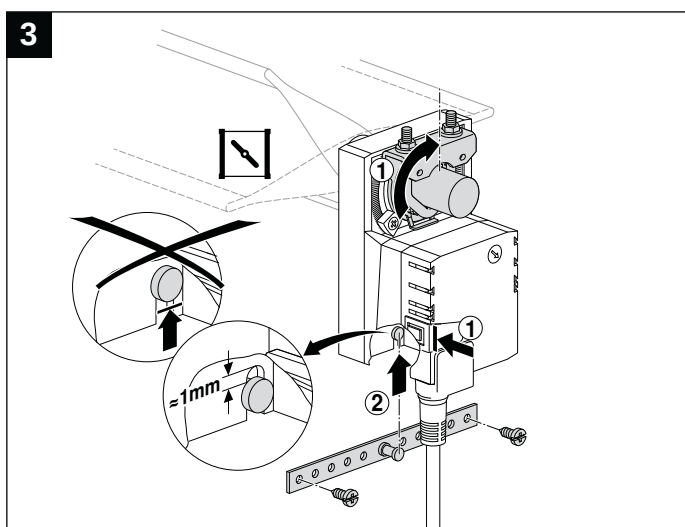
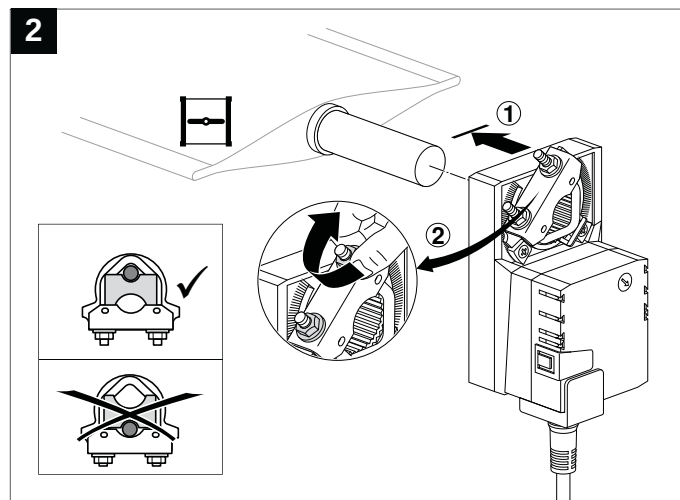
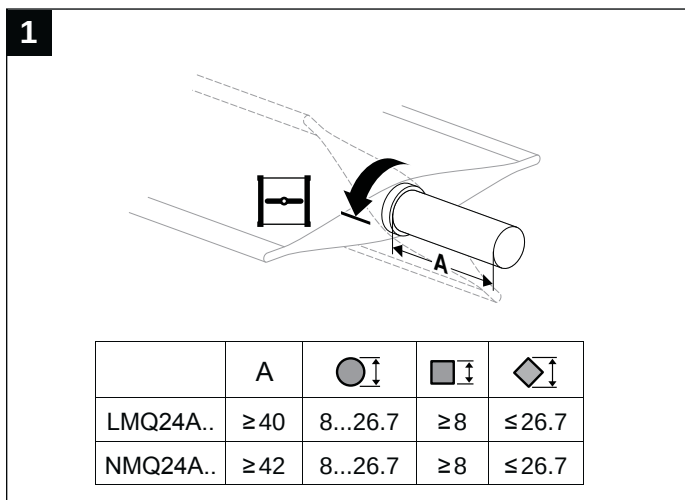


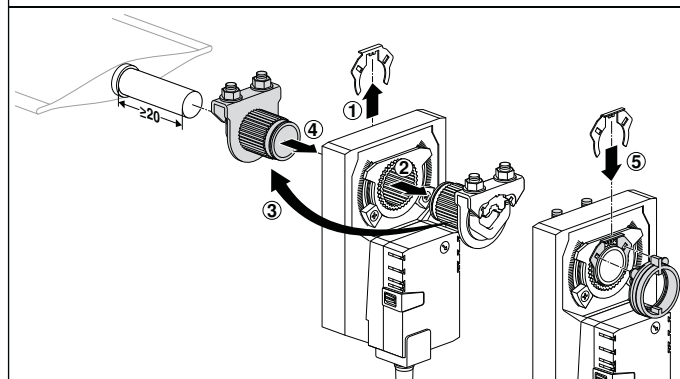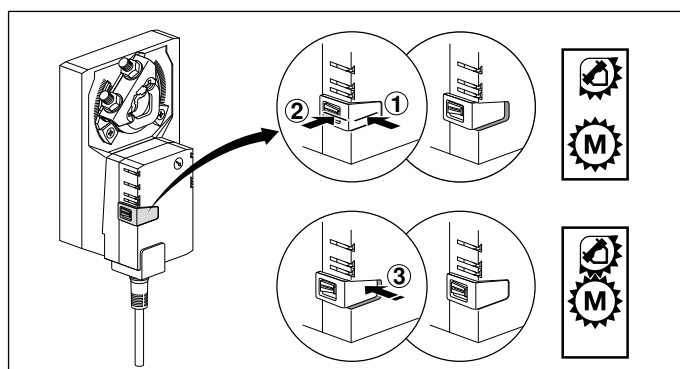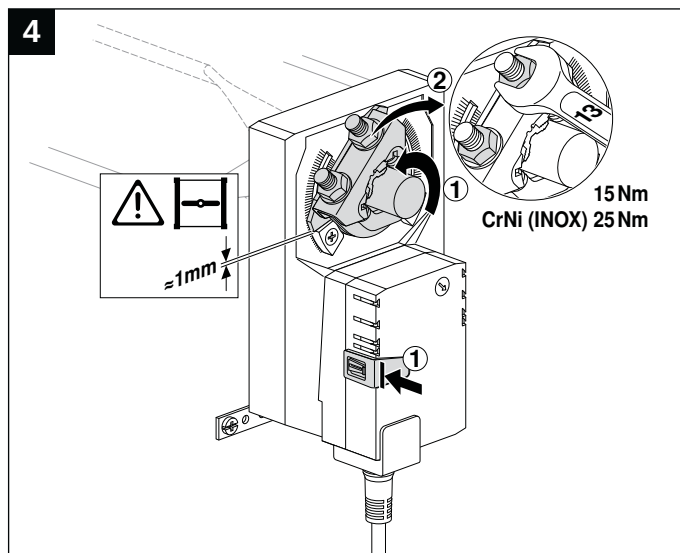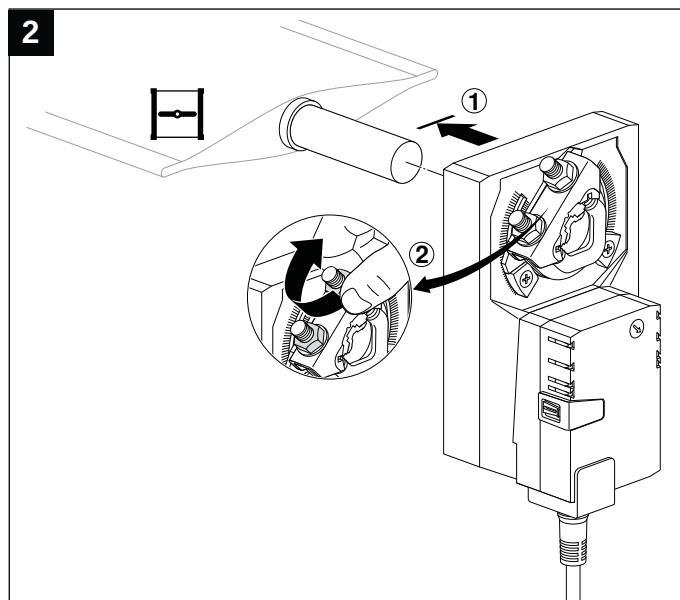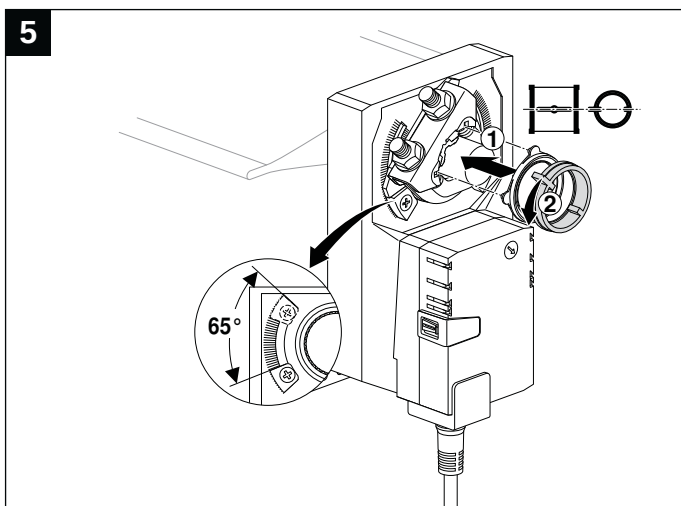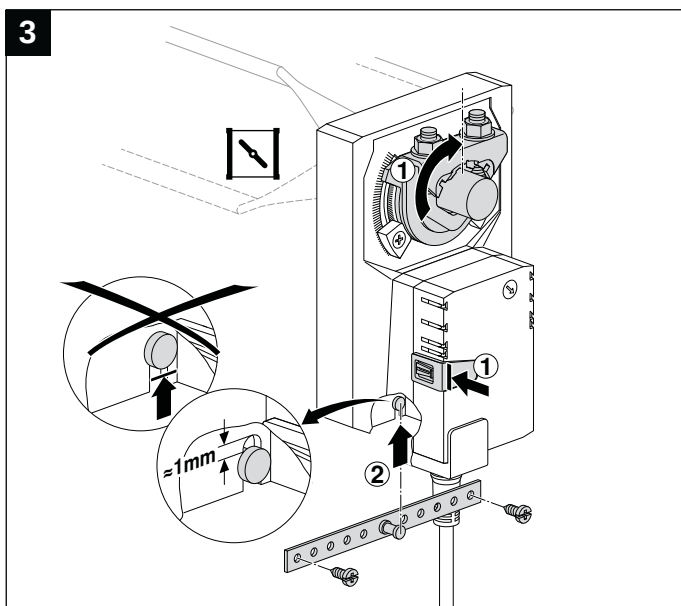
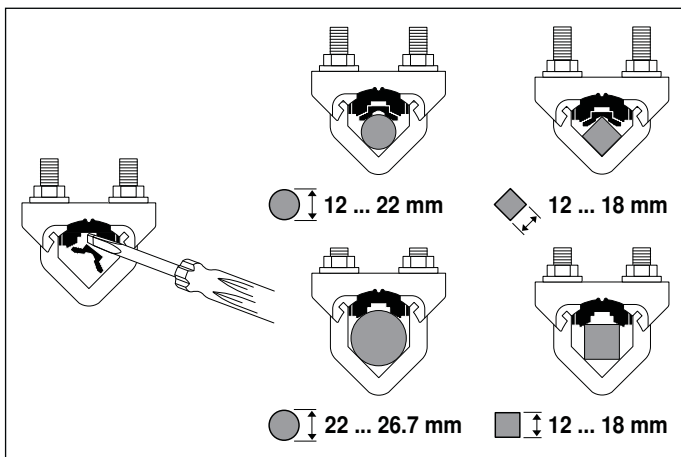
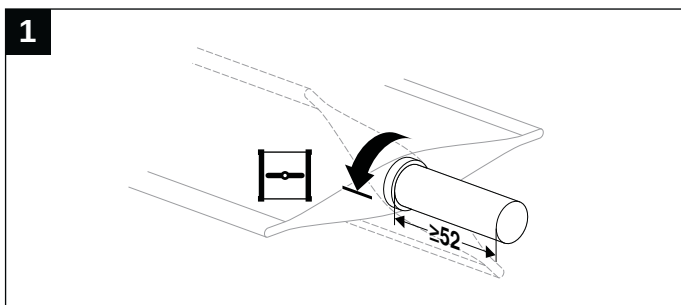




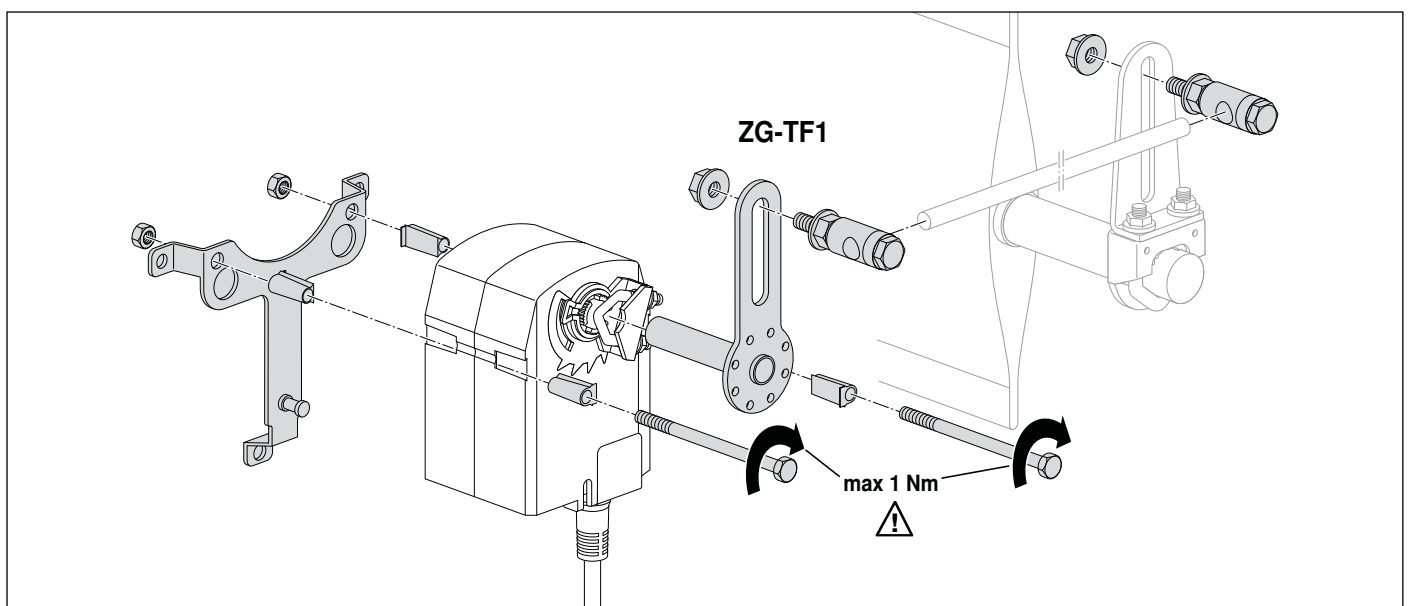
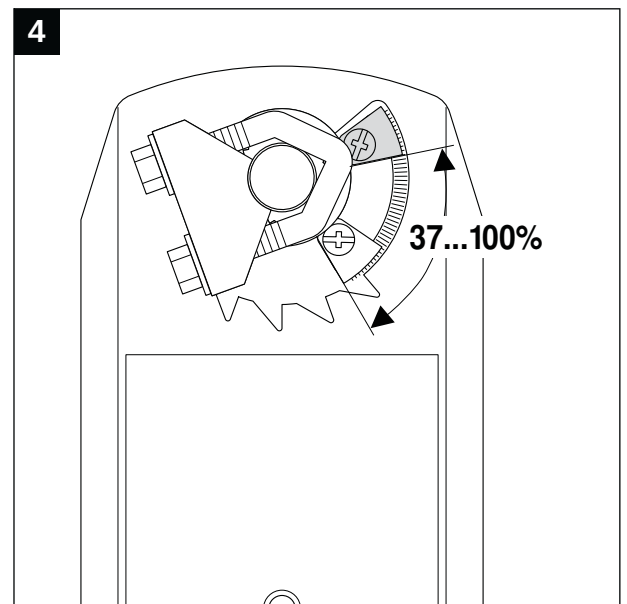
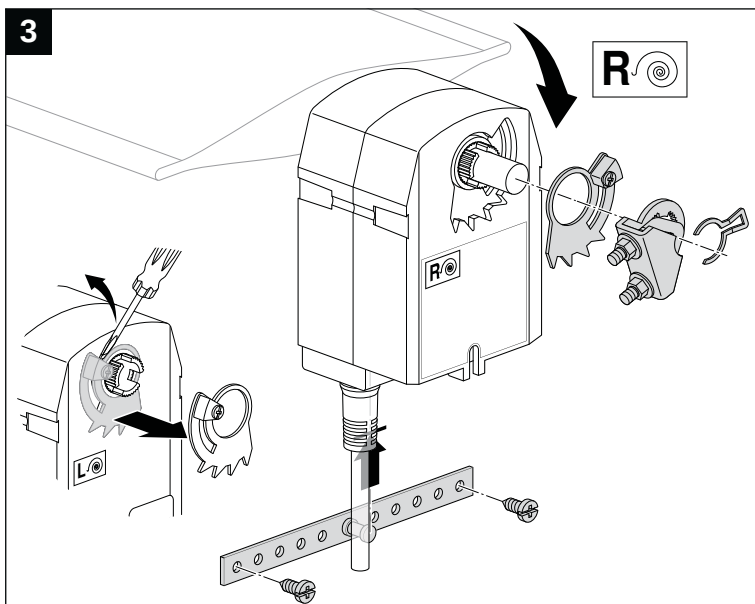
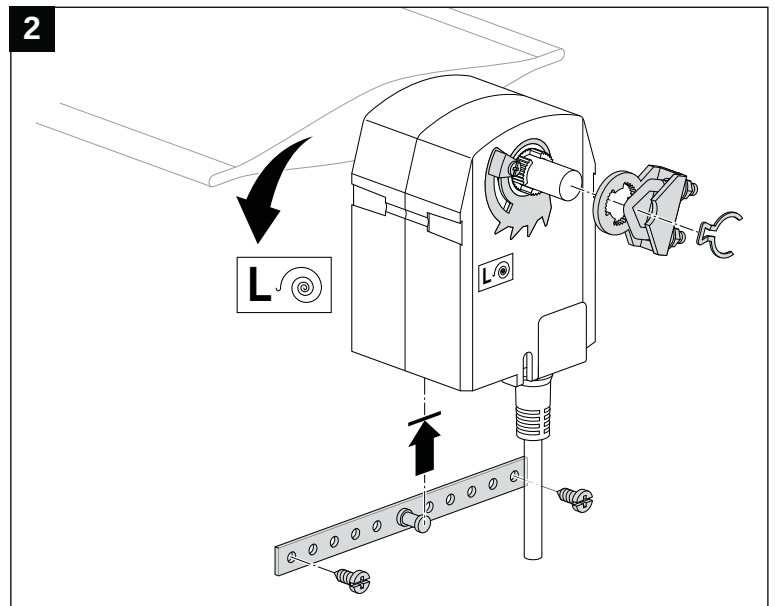
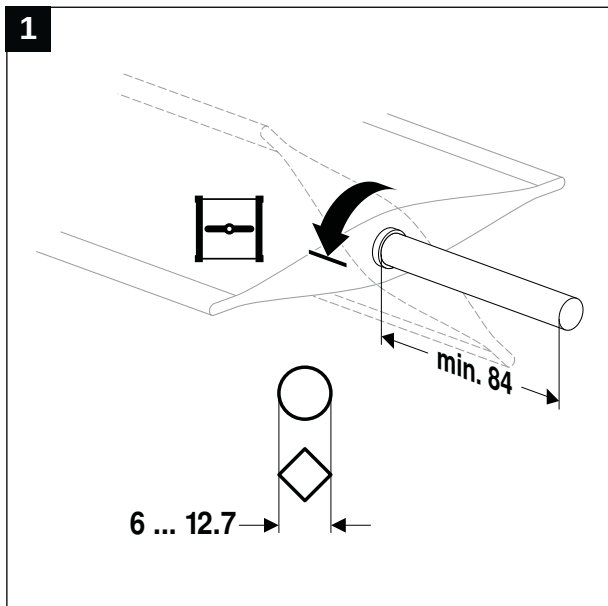


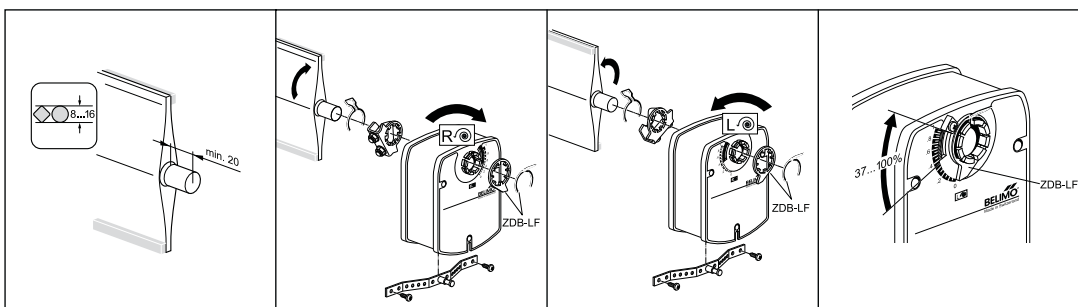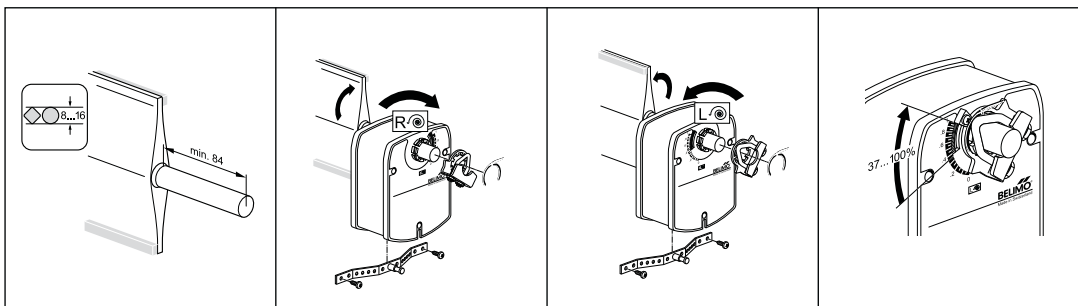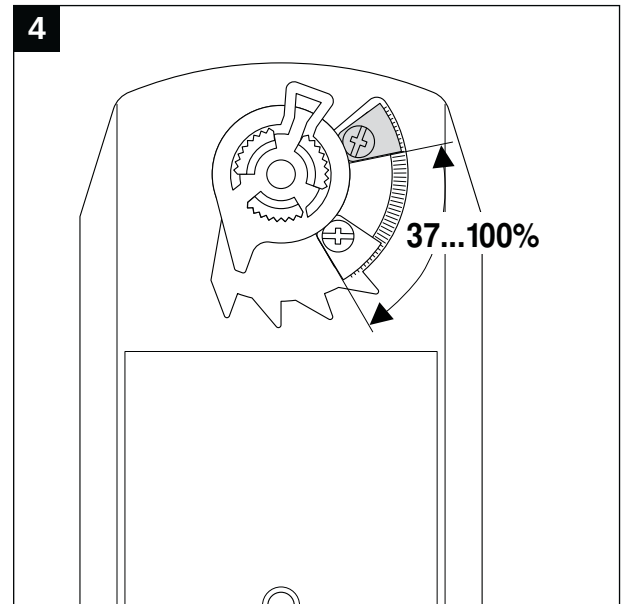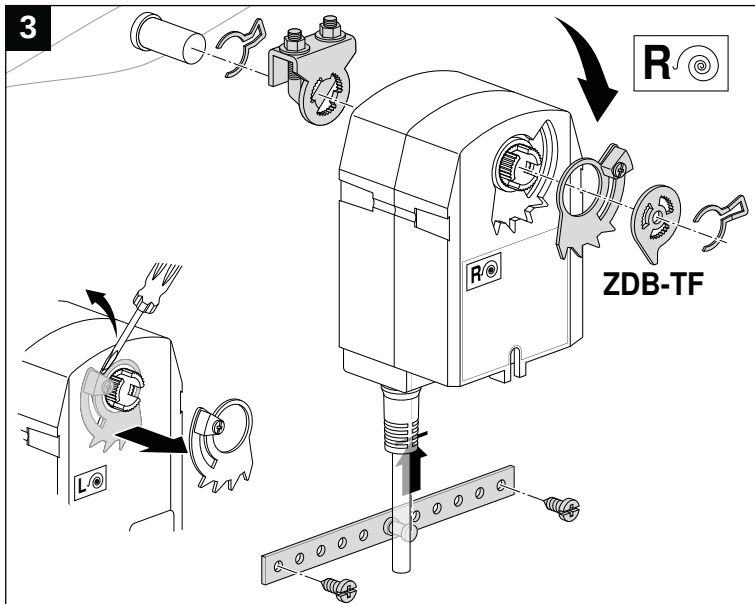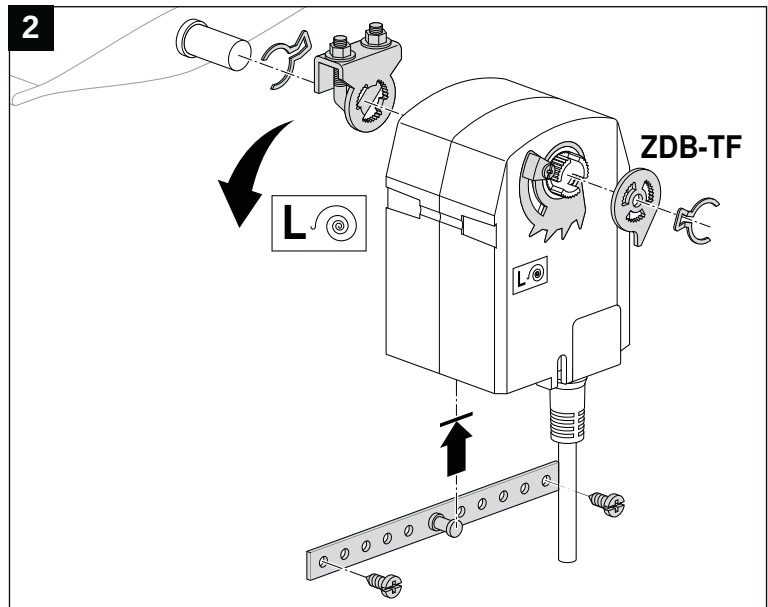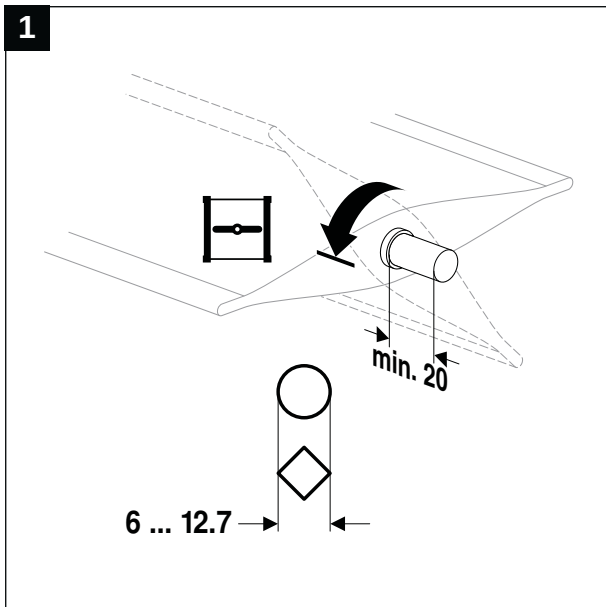


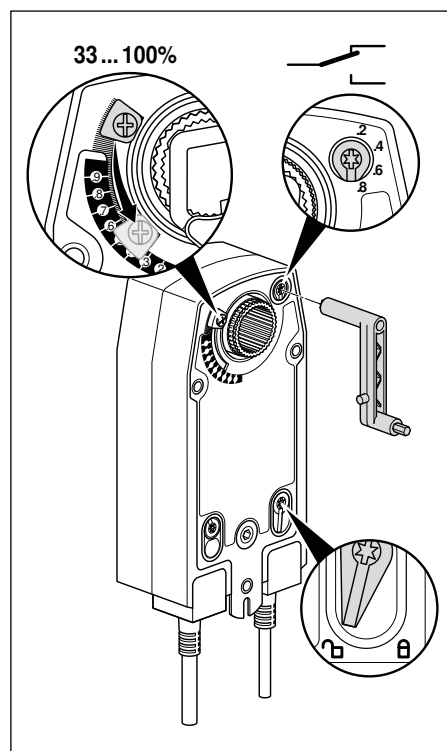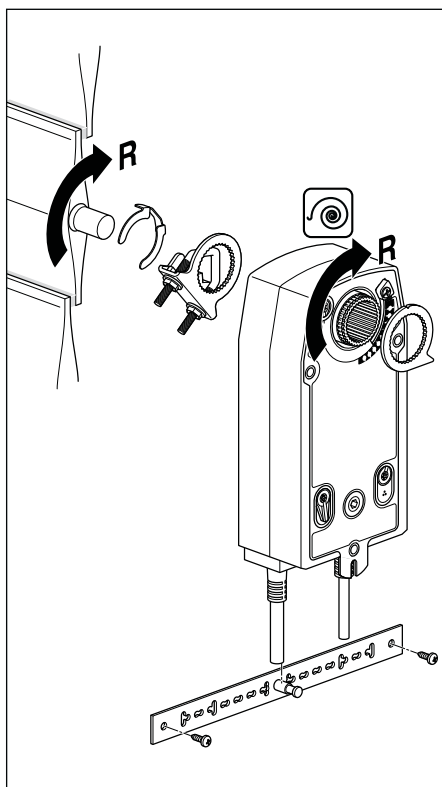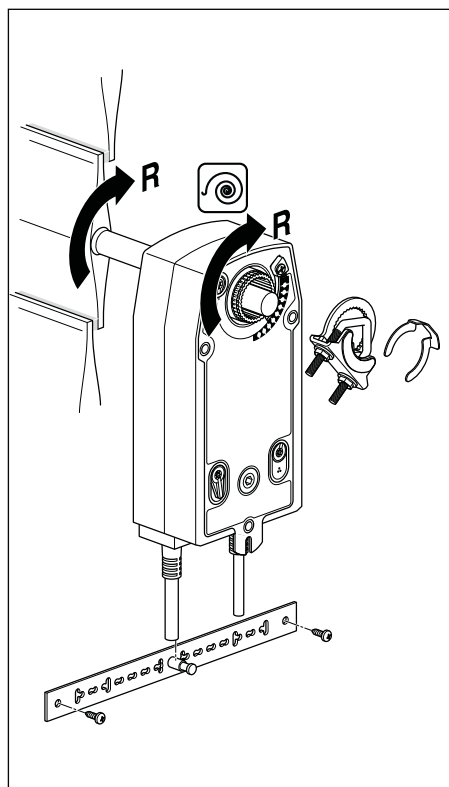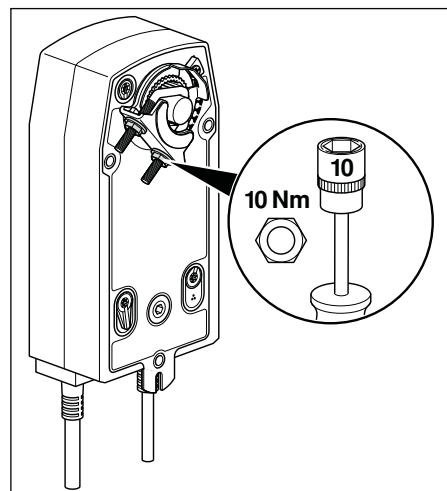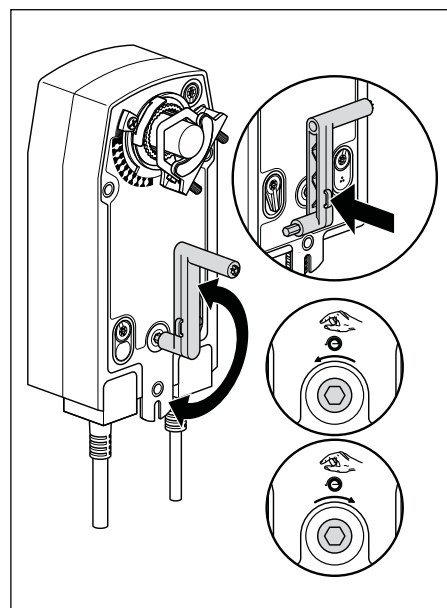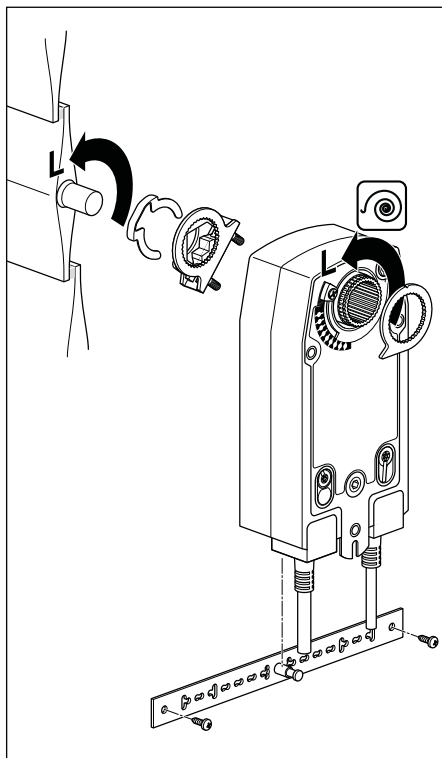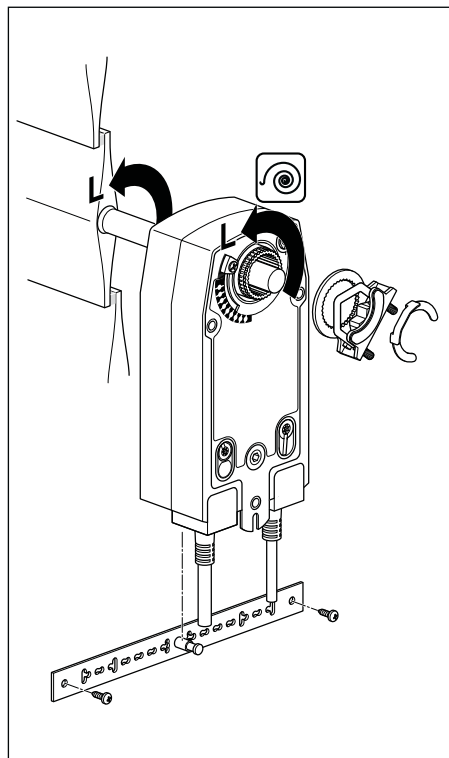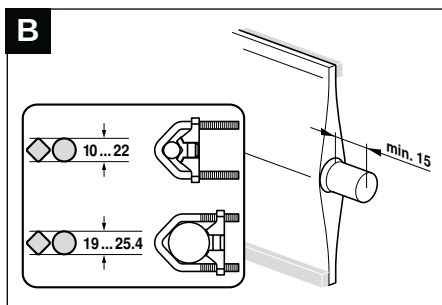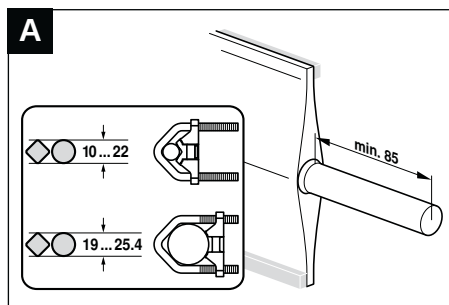

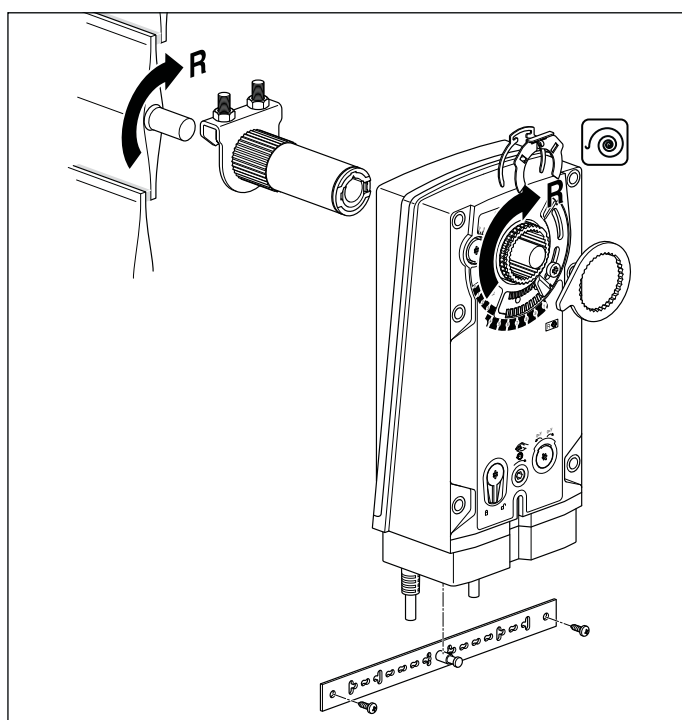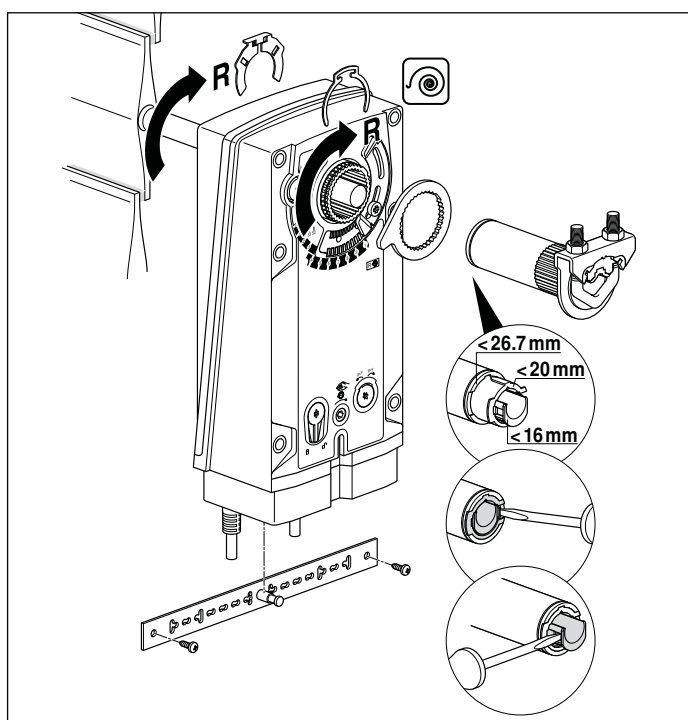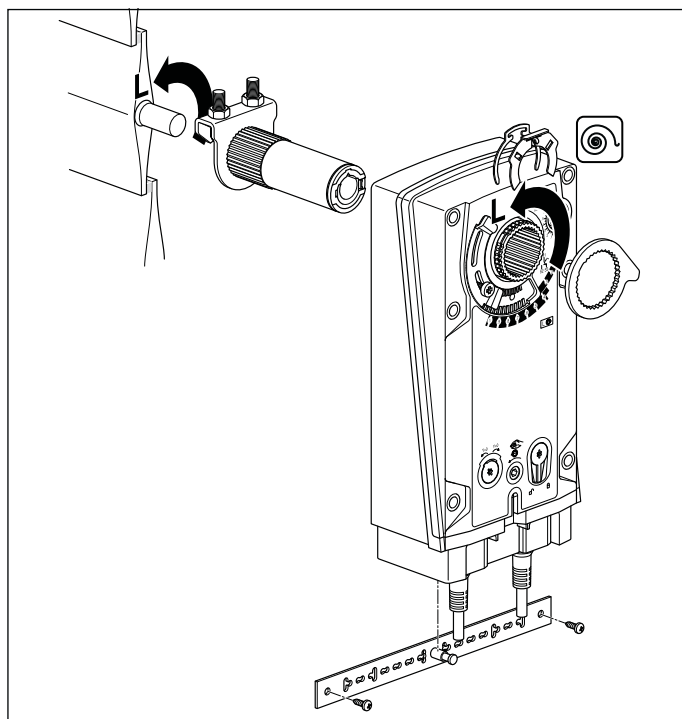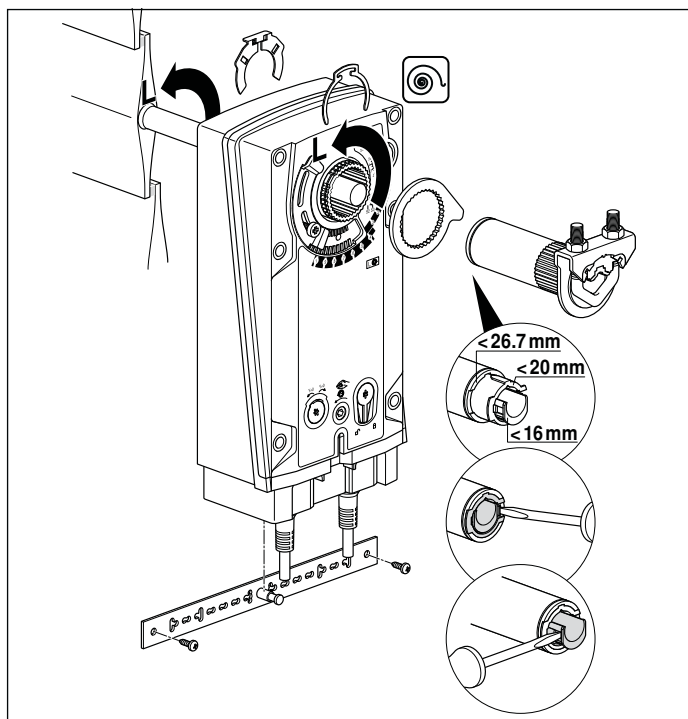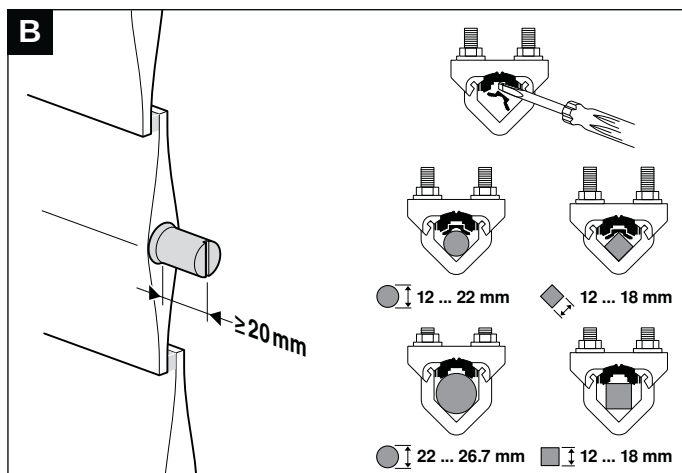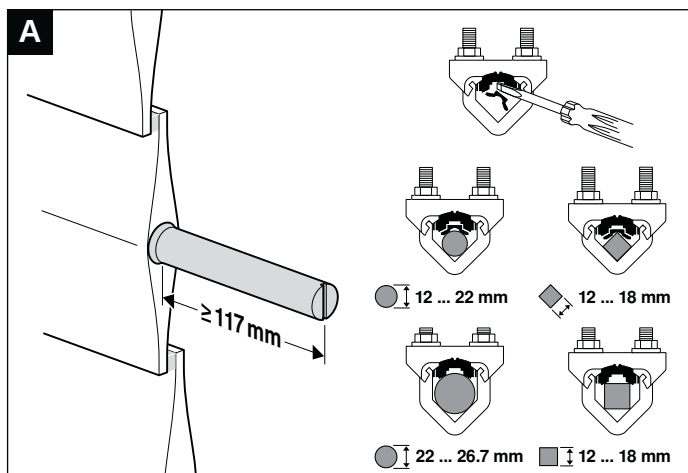

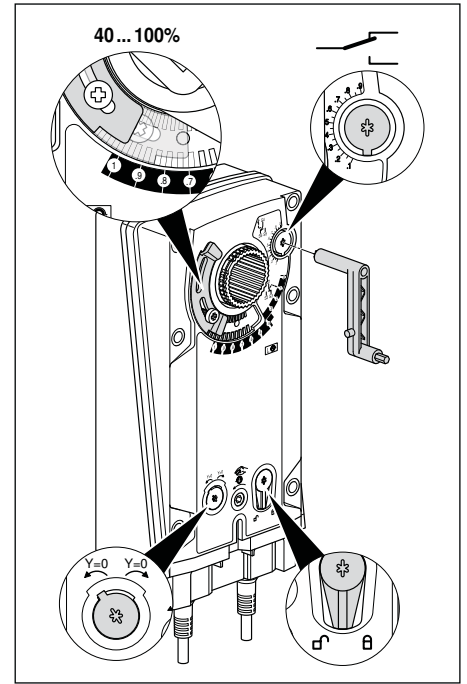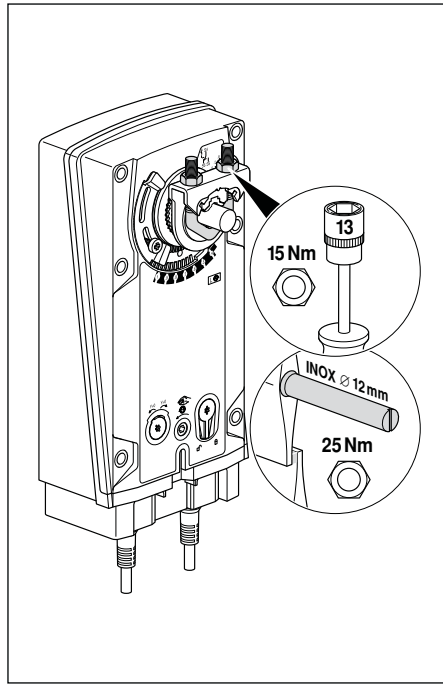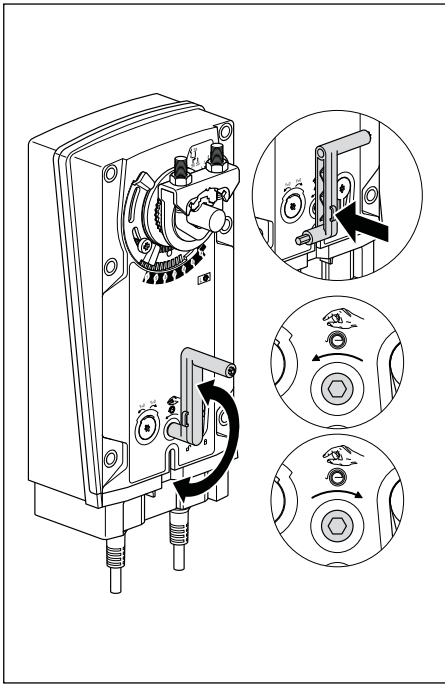

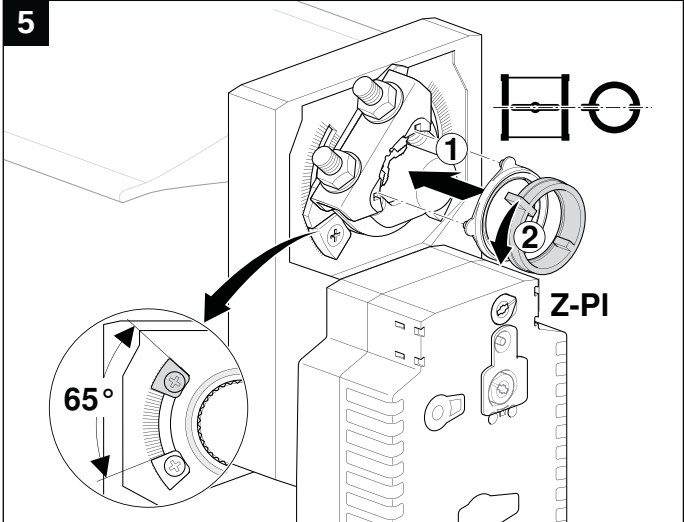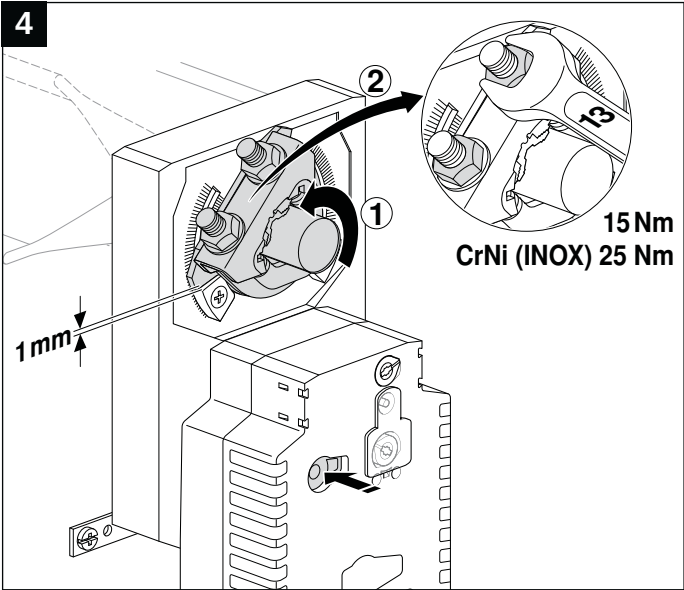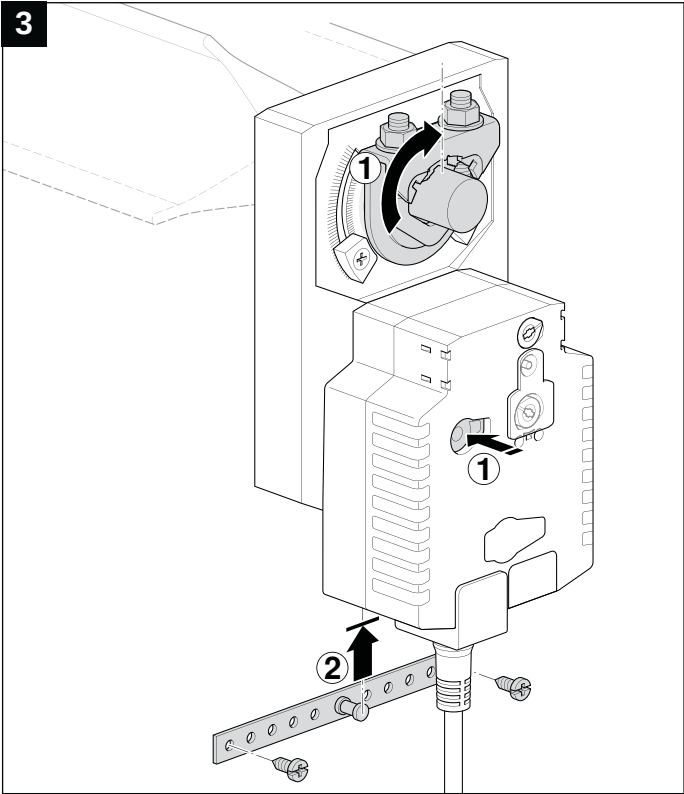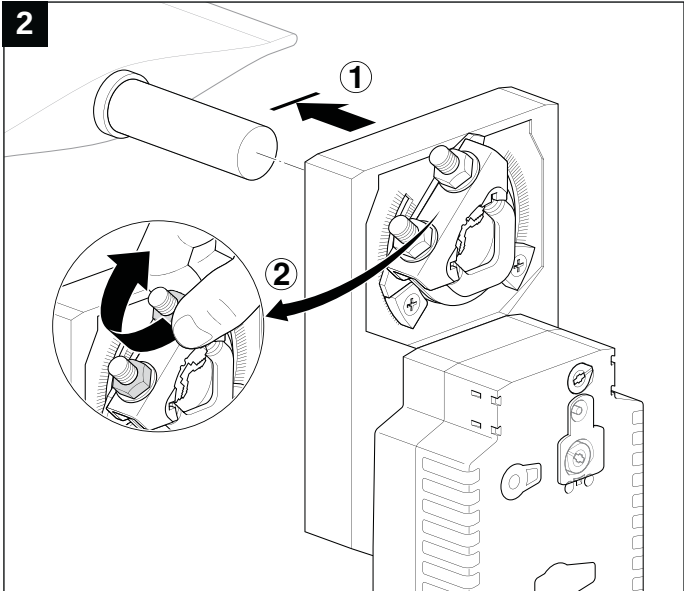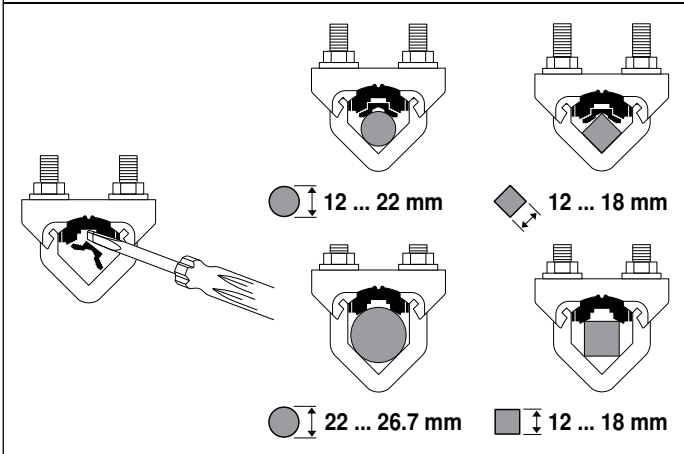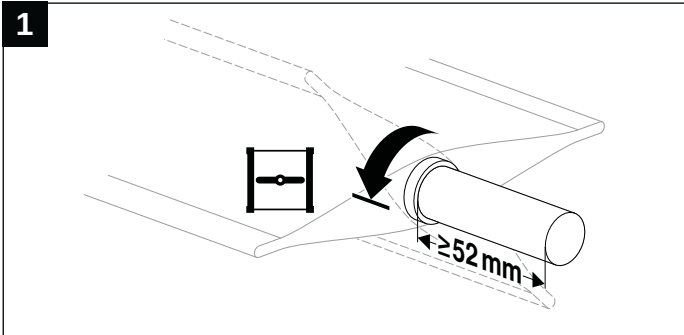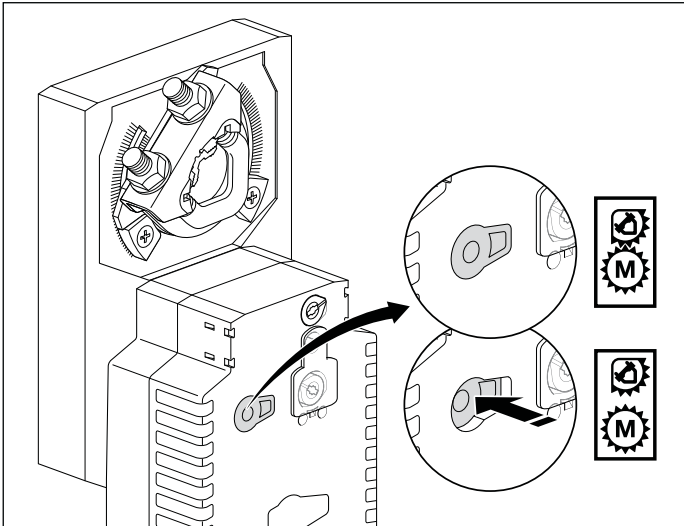

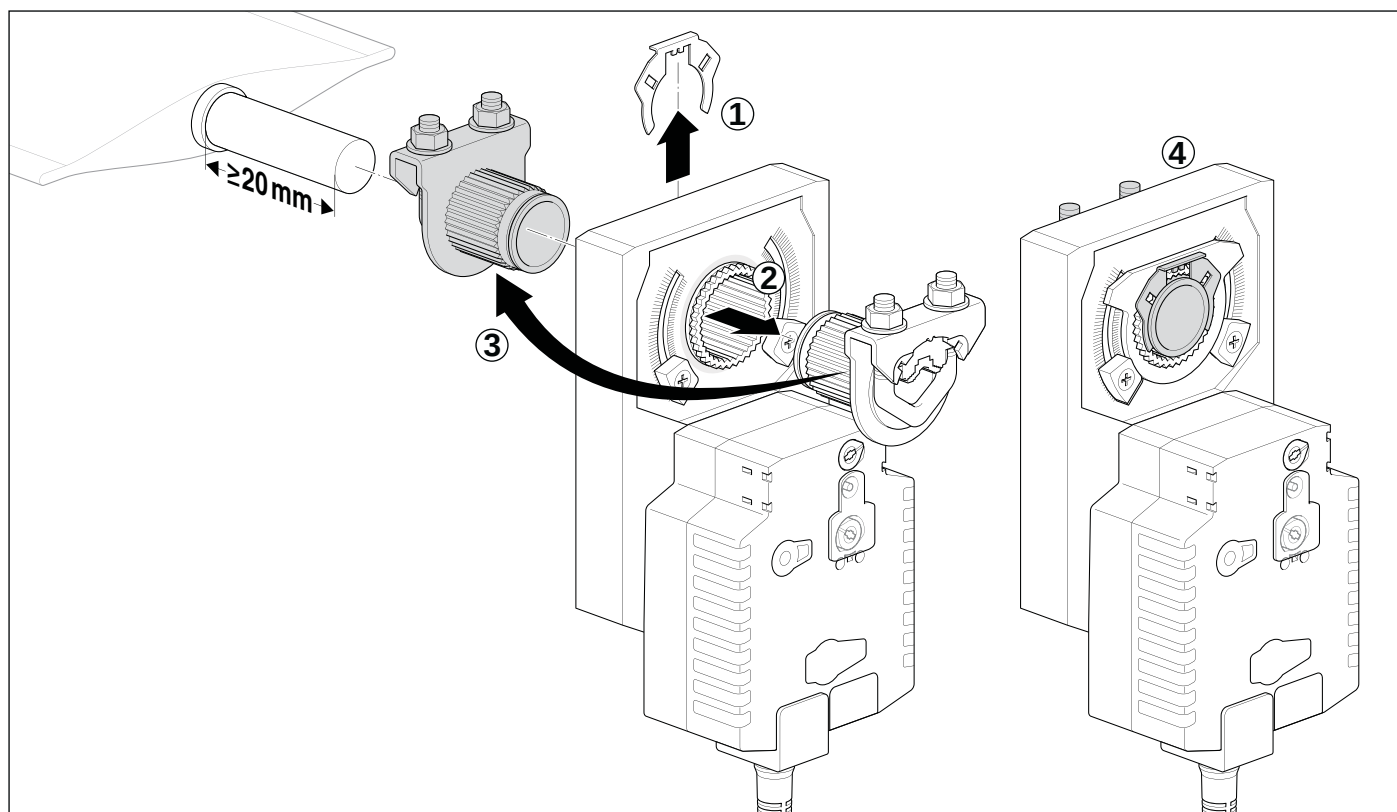


Wiring diagrams: CM..series actuators


Notes:

- Parallel connection of several actuators is possible.
- Power consumption must be observed.


Open/Close control

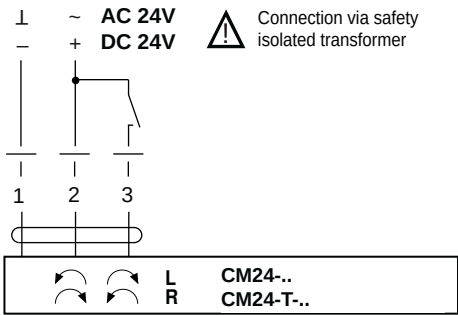


3-point control

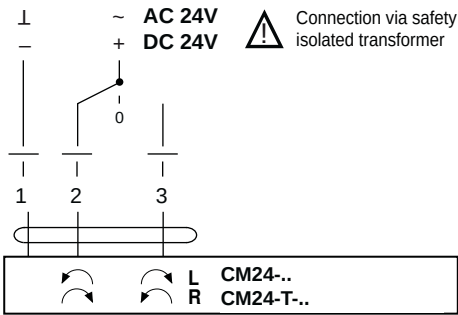


Modulating control

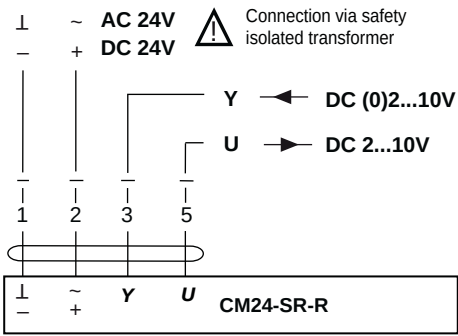



Open/Close control

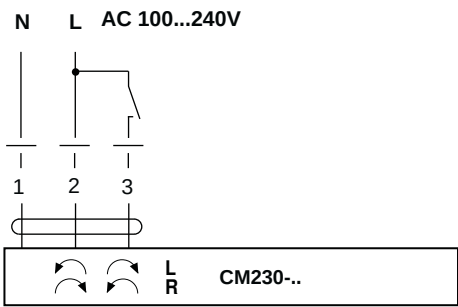


3-point control

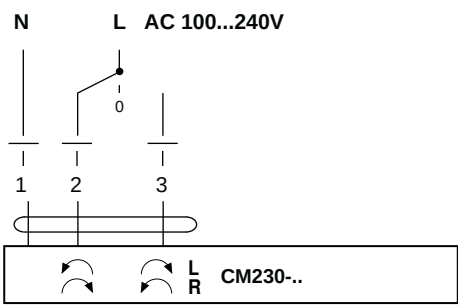


Wiring diagrams: Open/Close actuators – parallel connection possible, please note the performance data

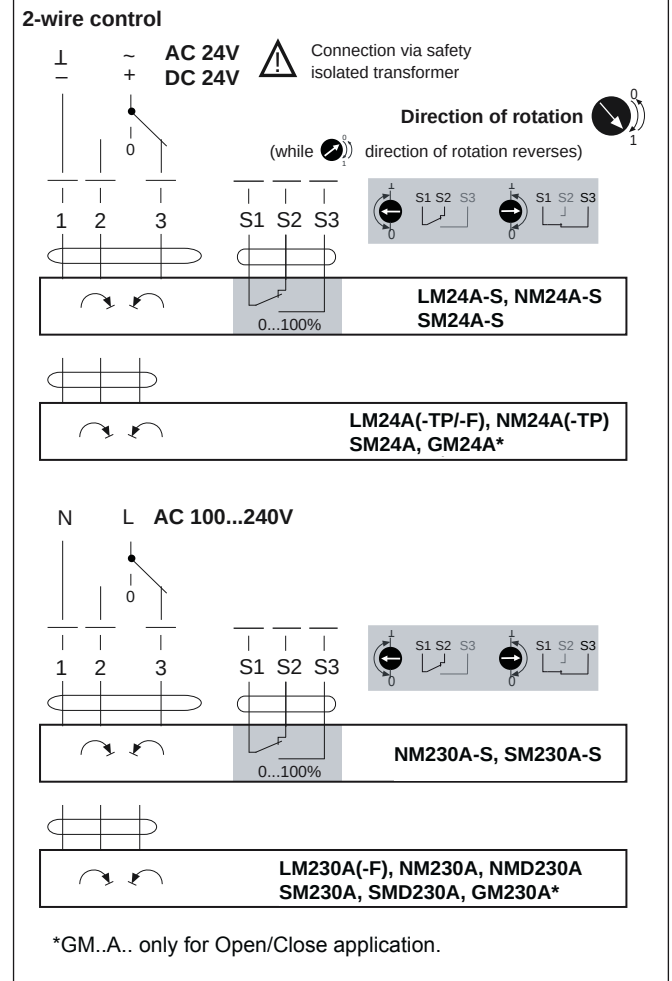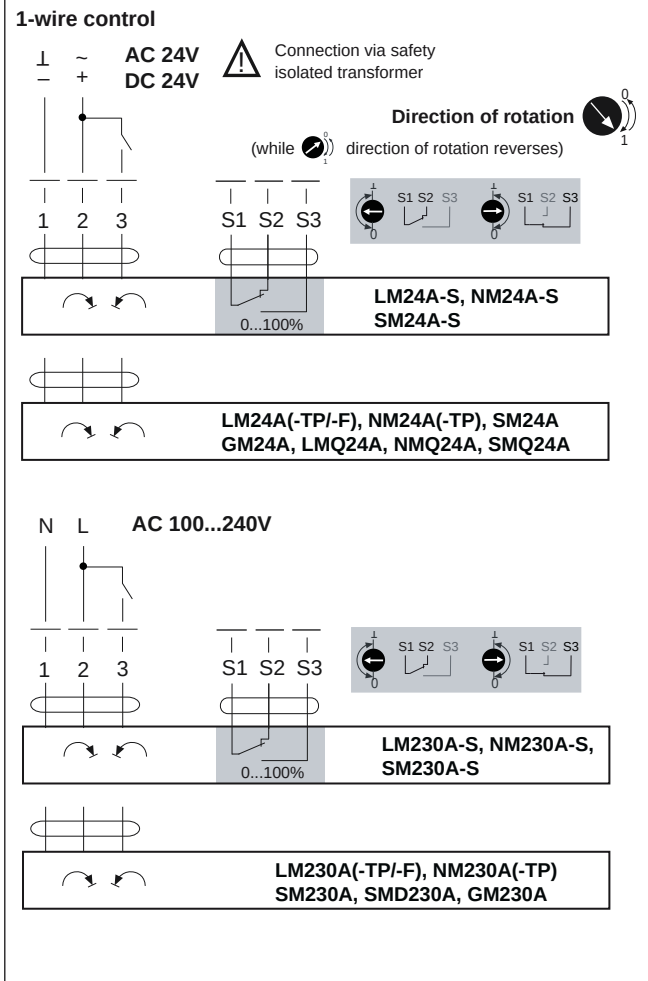

Wiring diagrams: Modulating actuators – parallel connection possible, please note the performance data

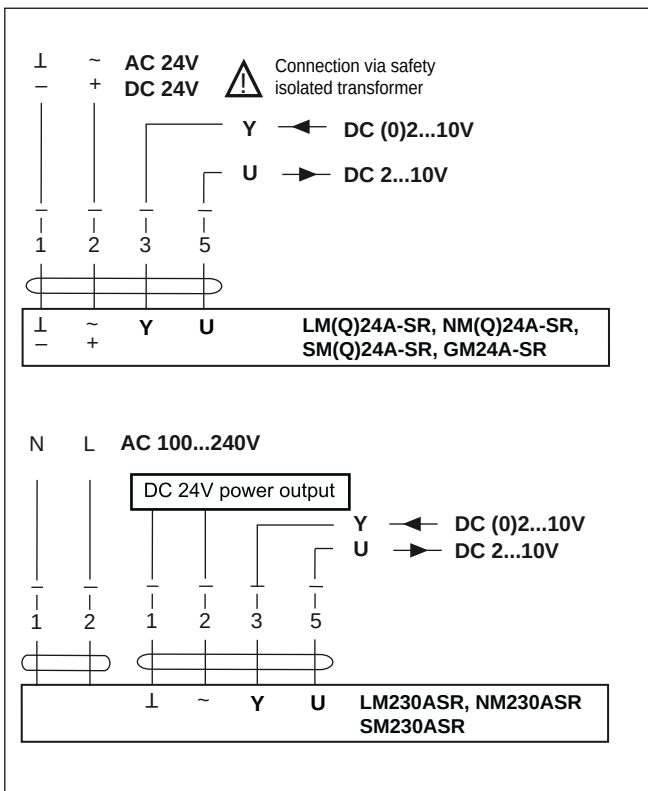

Position - signal voltage

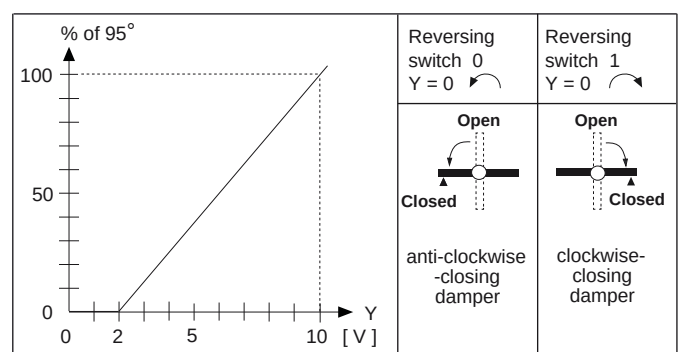

Direction of rotation 





Notes:

- N L AC 100...240V (for TF230..)

⊥ ~ AC/DC 24V







Connection via safety
isolated transformer

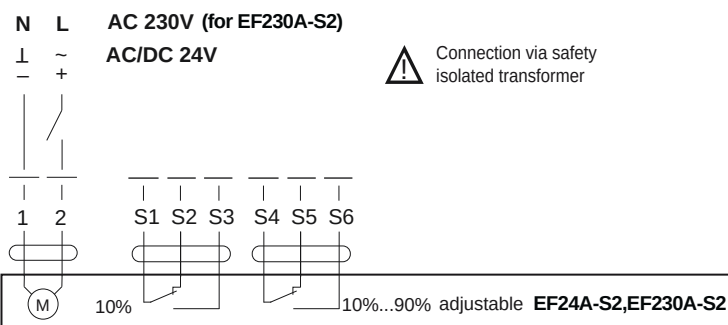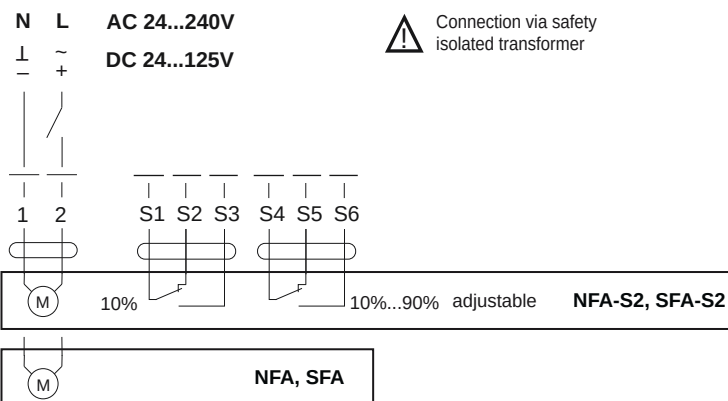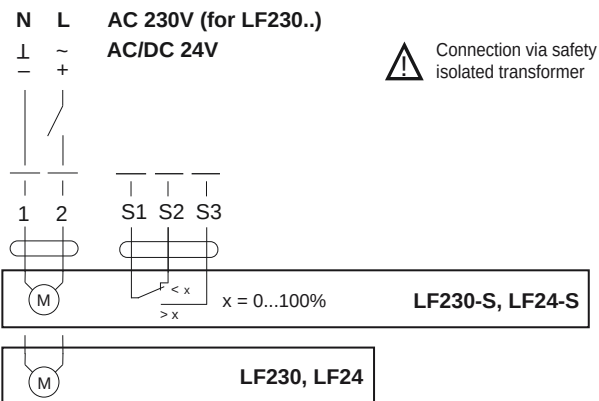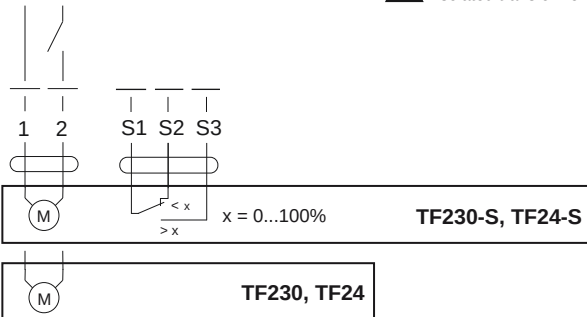

Wiring diagrams: 3-point actuators

Notes:







- Connection via safety isolating transformer.
- Parallel connection of several actuators is possible.
- Power consumption must be observed.

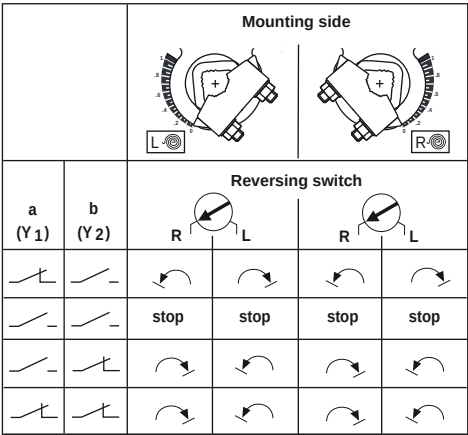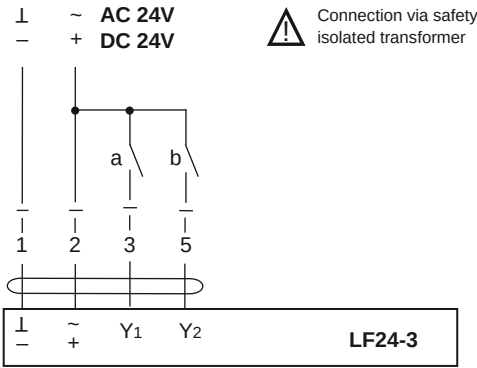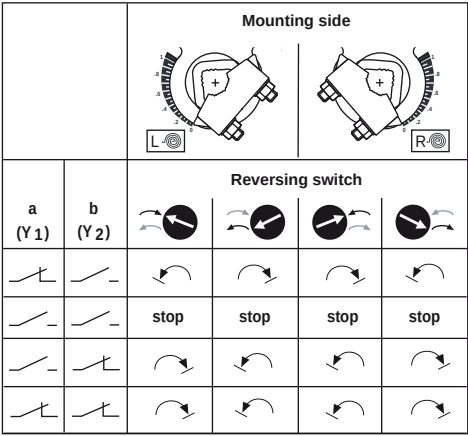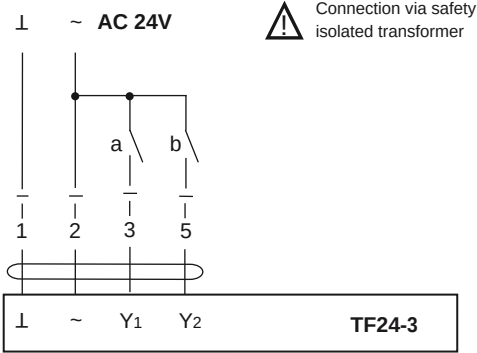


Wiring diagrams: modulating actuators

Notes:


- Connection via safety isolating transformer.
- Parallel connection of several actuators is possible.
- Power consumption must be observed.

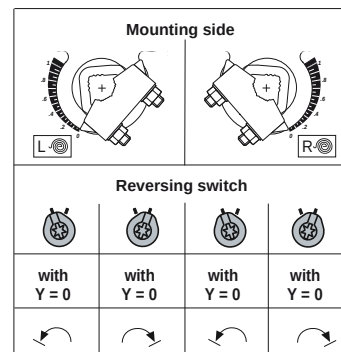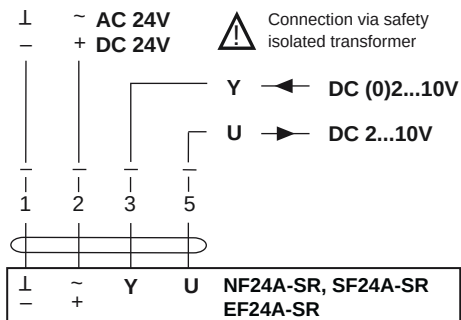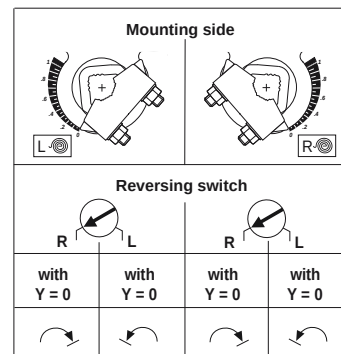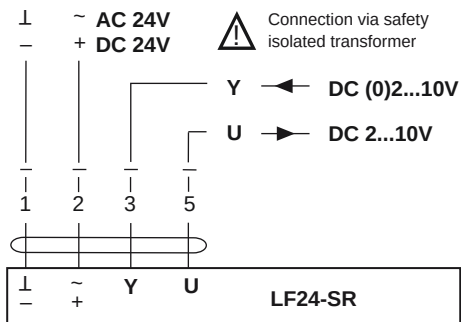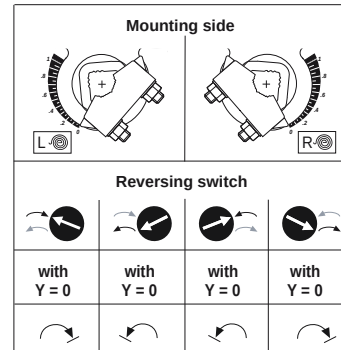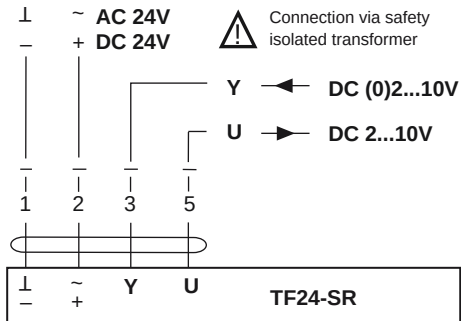


Wiring diagrams: Open/Close actuators

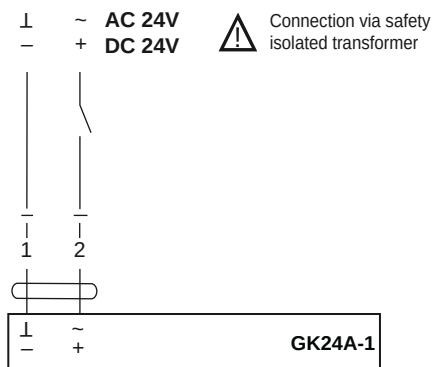


Wiring diagram: -MF

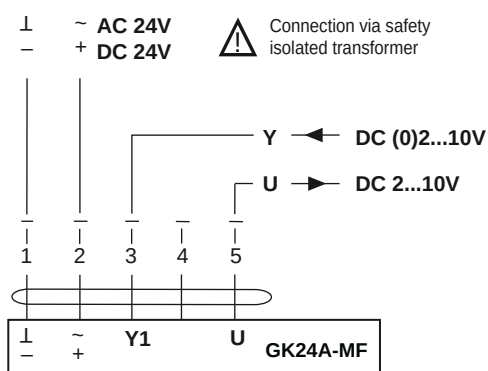

Open/Close control

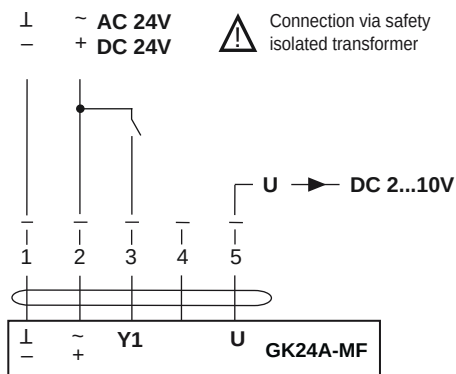

3-point control

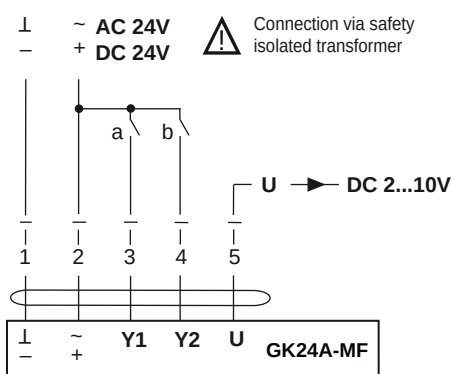


a (Y 1)	b (Y 2)	Reversing switch	
			
		stop	stop
			
			

Auxiliary switch adjustment for General Damper Actuators

1. Press the pushbutton, manually operate the universal clamp to desired switch position.
2. Turn switch pointer to the middle line.
3. When actuator moves clockwise (counter clockwise) to switch position, switch indicator passes the middle line counter clockwise (clockwise), the contact between S1 and S3 is disconnected (connected) and the contact between S1 and S2 is connected (disconnected).

Note: The switching point should be about 5° from the mechanical end stops (1 short step on the scale).

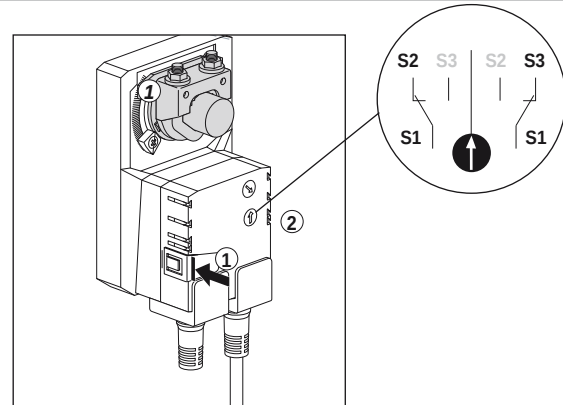

Auxiliary switch adjustment for Mechanical Fail-Safe Damper Actuators


LF.-S (Mounting side R); NFA-S2, SFA-S2, EF..A-S2 (Mounting side L)

Starting point: Actuator in safe position

Procedure

Turn the knob of the auxiliary switch until the tip of the arrow is pointing to the required switching position (see right). Example: Switching point setting = 4 corresponds to 40% angle of rotation.

When the actuator runs to the operating position (ccw ↺), the switch knob will also rotate counter-clockwise (ccw ↺) and the auxiliary switch will operate as the tip of the arrow passes the scale zero (S1–S3 linked).

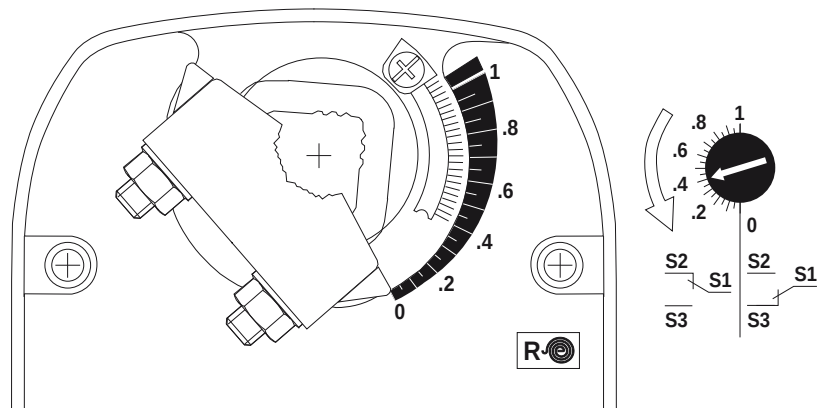

Fast Running Q.. Actuators operating controls and indicators



- ① **Direction of rotation switch**
Switching over: Direction of rotation changes
- ② **Pushbutton and green LED display**
Off: No voltage supply or fault
On: In operation
Press button: Switches on angle of rotation adaption followed by standard operation
- ③ **Pushbutton and yellow LED display**
Off: Standard operation
On: Adaption or synchronising process active
Press button: No function
- ④ **Gear disengagement switch**
Press button: Gear disengaged, motor stops, manual override possible
Release button: Gear engaged, synchronisation starts, followed by standard operation

Check voltage supply connection


- ② Off and ③ On } Check the supply connections.
- ② Blinking and ③ Blinking } Possibly $\perp$ and ∇ are swapped over.


- ⑤ **No function**


		Actuators										
		CM	LM	NM	SM	GM	TF	LF	NFA	SFA	EF	GK
S..A..	Auxiliary switch, add on											
	S1A 1xSPDT 3A(0.5A), AC 250V		•	•	•	•						•
	S2A 2xSPDT 3A(0.5A), AC 250V		•	•	•	•						•
	S2A -F 2xSPDT 3A(0.5A), AC 250V							•	•	•		
P..A..	Feedback potentiometer, add on											
	P140A.. 140Ω		•	•	•	•						•
	P500A.. 500Ω		•	•	•	•						•
	P1000A.. 1000Ω		•	•	•	•						•
	P2800A.. 2800Ω		•	•	•	•						•
	P5000A.. 5000Ω		•	•	•	•						•
	P10000A.. 10000Ω		•	•	•	•						•
	P200A-F 200Ω							•	•	•		
SGA24	Positioner for surface mounting	1)	1)	1)	1)	1)	1)	1)	1)	1)	1)	2)
	0...100% Reversible operating range DC 0...10V or DC 2...10V											
SGE24	Positioner for rack mounting	1)	1)	1)	1)	1)	1)	1)	1)	1)	1)	2)
	0...100% Reversible operating range DC 0...10V or DC 2...10V											
SGF24	Positioner for front-panel mounting	1)	1)	1)	1)	1)	1)	1)	1)	1)	1)	2)
	0...100% Reversible operating range DC 0...10V or DC 2...10V											
ZDA24	Digital position indicator for front-panel mounting	1)	1)	1)	1)	1)	1)	1)	1)	1)	1)	2)
	0...99% Front size 72x72mm Operating range DC 2...10V											

1) For ...-SR

2) For ...-MF

		Actuators							
		LM	NM LMQ NMQ	SM SMD	GM SMQ	TF	LF	NFA	SFA
AN-20	Actuator arm 		•	•					
AH-25	Actuator arm 		•	•					
AH-GMA	Actuator arm 				•				
AV6-20	Shaft extension Length approximately 170mm For damper spindles ø6...20mm Extension ø10mm 	•				•	•		
AV8-25	Shaft extension Length approximately 250mm For damper spindles ø8...25mm Extension ø20mm 		•	•					
IND-AFB	NFA/SFA.. position indicator 							•	•
K6-1	Spindle clamp for LF.. For damper spindles ø16...20mm 						•		
K7-2	NFA/SFA.. standard clamp 1/2", 3/4", 1.05" 							•	•
K-ENSA	Spindle clamp For damper spindles ø8...20mm 		•	•					
K-NA	Reversible spindle clamp For damper spindles ø8...20mm 		• (except NMQ)						
K-SA	Reversible spindle clamp For damper spindles ø10...20mm 			• (NMQ)					
KG8	Ball joint Suitable for damper crank arm KH8 For round steel rod with ø8mm Zinc-plated steel 		•	•		•	•	•	•
KG10A	Ball joint Suitable for damper crank arm KH8 For round steel rod with ø10mm Zinc-plated steel 		•	•	•	•	•	•	•

		Actuators							
		LM	NM LMQ NMQ	SM SMD..	GM SMQ	TF	LF	NFA	SFA
ZG-118	NFA/SFA.. mounting bracket 							•	•
ZG-AFB	NFA/SFA.. crank arm adapter kit 							•	•
ZG-AFB118	NFA/SFA.. crank arm adapter kit 							•	•
ZG-GMA	Mounting kit For flat and side mounting 				•				
ZG-LF1	Damper linkage kit For side mounting (with 2 ball joint KG8) 						•		
ZG-LF3	Damper linkage kit For side mounting (with 2 ball joint KG8) 						•		
ZG-NMA	Mounting kit For flat and side mounting 		•						
ZG-SMA	Mounting kit For flat and side mounting 			•					
ZG-TF1	Damper linkage For flat mounting 					•			
Z-SF	Retrofit adapter for NG NFA/SFA.. while replacing old NF/AF/AFR 							•	•
ZF10-NSA-F	10x10 formfit adapter mutipack 20 pieces							•	•
ZF12-NSA-F	12x12 formfit adapter mutipack 20 pieces							•	•
ZF16-NSA-F	16x16 formfit adapter mutipack 20 pieces							•	•

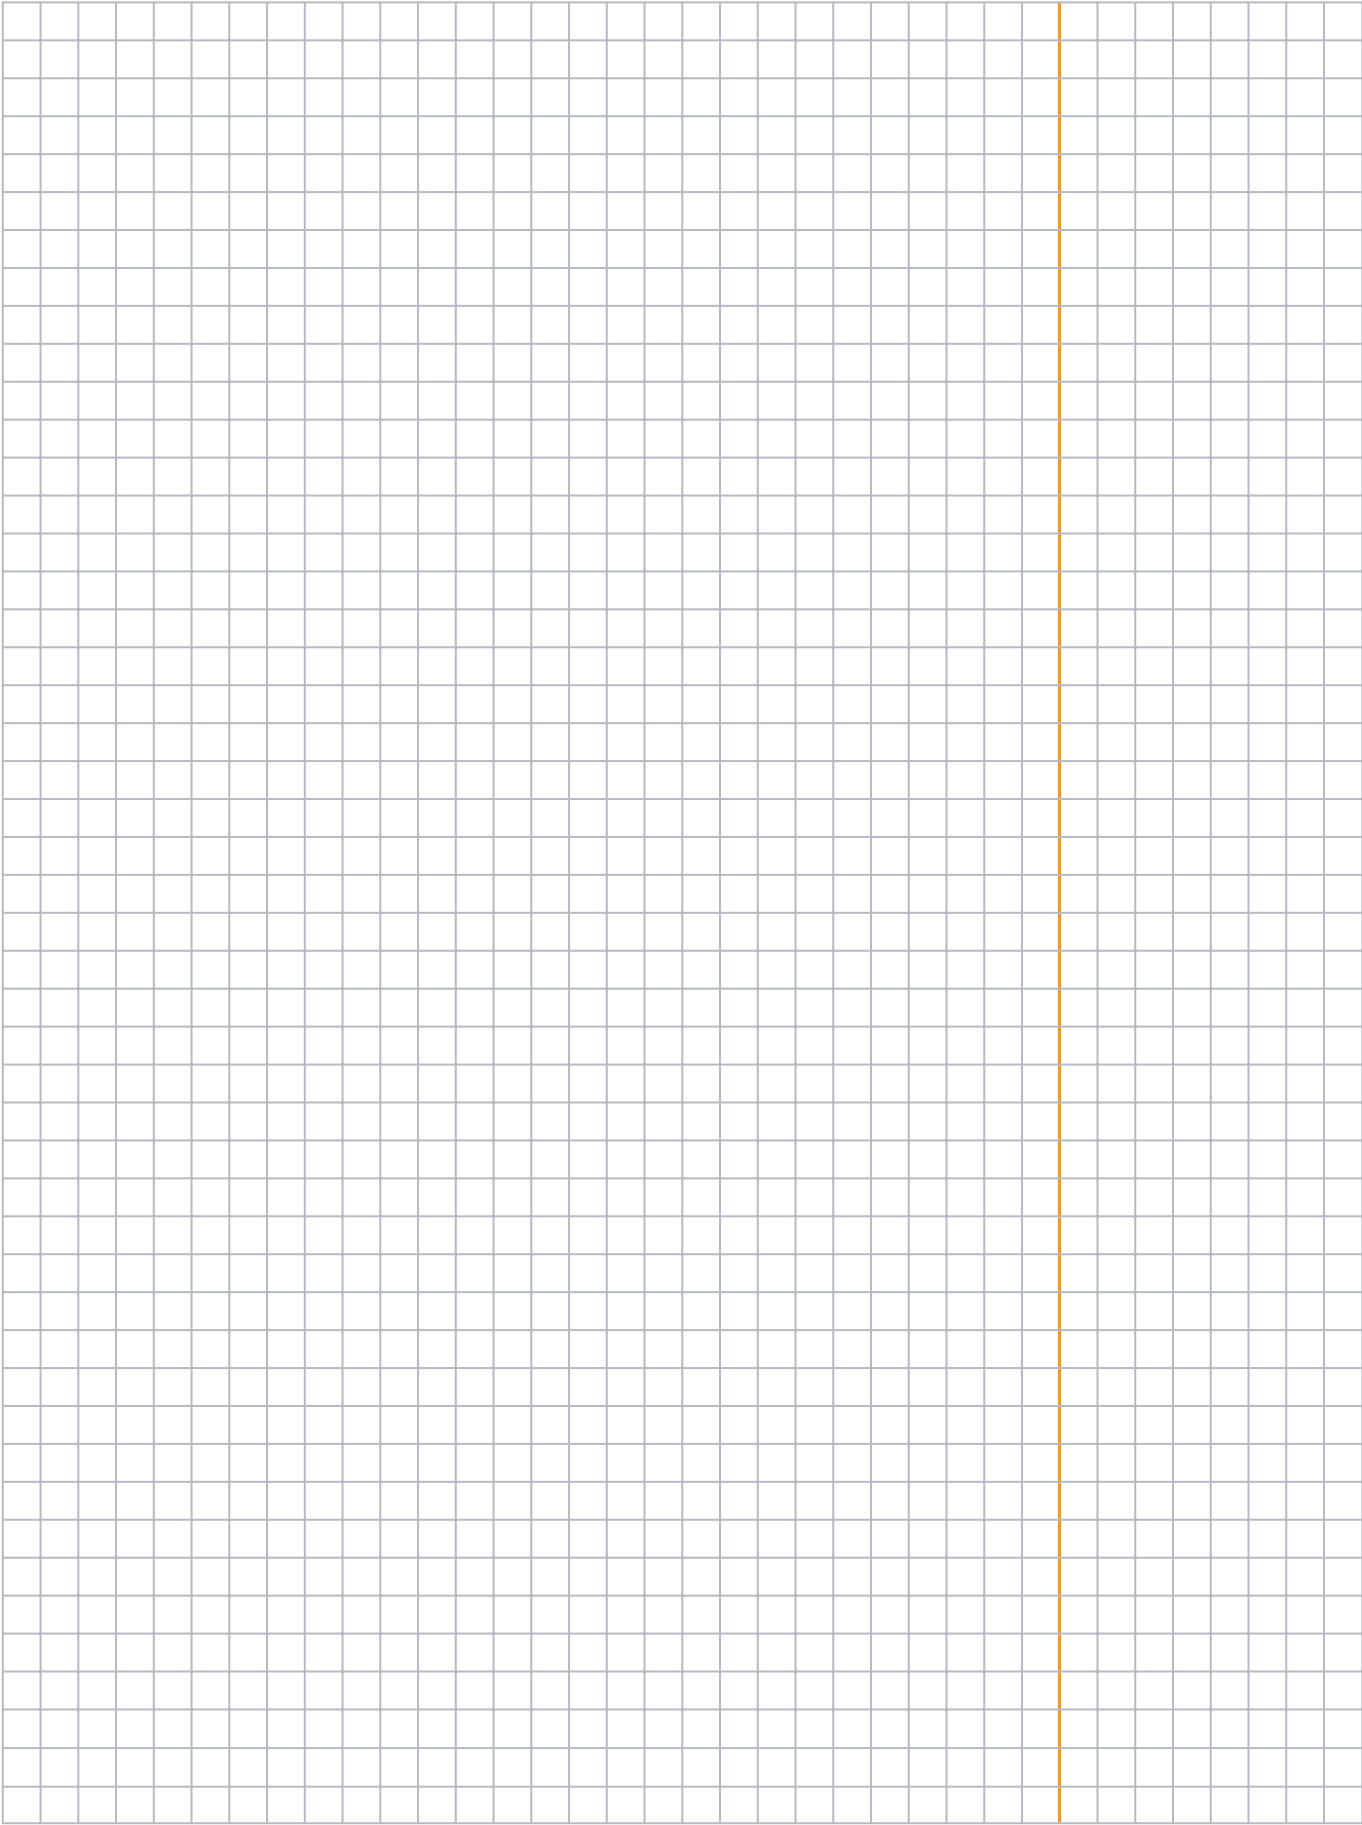

ASIA PACIFIC HEADQUARTERS**Belimo Actuators Ltd.**

Room 1601-6, 16/F, New Commerce Centre
19 On Sum Street, Shatin, N.T., Hong Kong
Tel: +852 2687 1716
Fax: +852 2687 1795
E-mail: info.asiapacific@belimo.ch

Belimo AUSTRALIA**Melbourne Office:**

Belimo Actuators Pty. Ltd.
12 Enterprise Court
Mulgrave Business Park
Mulgrave, VIC 3170, Australia
Tel: +61 (0)3 8585 7800
Fax: +61 (0)3 8585 7811
E-mail: info.australia@belimo.ch

Brisbane Office:

Belimo Actuators Pty. Ltd.
Unit 26 / 23 Ashtan Place
Banyo, QLD 4014, Australia
Tel: +61 (0)7 3267 1760

Sydney Office:

Belimo Actuators Pty. Ltd.
Suite 2.20, 32 Delhi Road
North Ryde, NSW 2113, Australia
Tel: +61 (0)2 9805 1777

Belimo CHINA**Shanghai Office:**

Belimo Actuators (Shanghai) Trading Ltd.
479 Chun Dong Road, Building C-2
Xin Zhuang Industry Park
Shanghai 201108, P.R. China
Tel: +86 21 5483 2929
Fax: +86 21 5483 2930
E-mail: info.shanghai@belimo.ch

Beijing Office:

Belimo Actuators Ltd.
Unit 1528-1530, 15F, Tower A
Jiatai International Mansion
No. 41, Middle East Fourth Ring Road
Chaoyang District, Beijing, 100025,
P.R. China
Tel: +86 10 6462 1382/1386
Fax: +86 10 6462 1383
E-mail: info.beijing@belimo.ch

Guangzhou Office:

Belimo Actuators Ltd.
Room 5217-5218, China International Centre,
Tower B, 33 Zhong Shan San Road, Yuexiu District,
Guangzhou 510055, P.R. China
Tel: +86 20 3435 1860
Fax: +86 20 3435 1870
E-mail: info.guangzhou@belimo.ch

Belimo HONG KONG**Hong Kong Office:**

Belimo Actuators Ltd.
Room 1601-6, 16/F, New Commerce Centre
19 On Sum Street, Shatin, N.T., Hong Kong
Tel: +852 2687 1716
Fax: +852 2687 1795
E-mail: info.hongkong@belimo.ch

Indonesia Office:

Belimo Actuators Ltd.
Graha Kencana Building 8th Floor Block B
Jl. Raya Perjuangan 88
Kebon Jeruk - Jakarta Barat 11530, Indonesia
Tel: +62 21 5367 8278
Fax: +62 21 5366 0688
E-mail: info.indonesia@belimo.ch

Japan Office:

Belimo Actuators Ltd.
2nd Floor, Yamaki Building III
3-1-5 Azumabashi, Sumida-ku
Tokyo 130-0001, Japan
Tel: +81 3 6823 6961
Fax: +81 3 3626 3911
E-mail: info.japan@belimo.ch

Malaysia Office:

Belimo Actuators Ltd
S-13-12, First Subang, Jalan SS15/4G
47500 Subang Jaya, Selangor, Malaysia
Tel: +03-56125833
Fax: +03-56125233
E-mail: info.malaysia@belimo.ch

Singapore Office

Belimo Actuators Ltd.
1 Tannery Road #08-04
One Tannery, Singapore 347719
Tel: +65 6842 1626
Fax: +65 6842 1630
E-mail: info.singapore@belimo.ch

Taiwan Office:

Belimo Actuators Ltd.
7F-2, No.343, Jhonghe Rd., Yonghe District
New Taipei City 234, Taiwan
Tel: +886 2 2922 8805
Fax: +886 2 2922 8806
E-mail: info.taiwan@belimo.ch

Thailand Office:

Belimo Actuators Ltd.
90/2 Pensiri Place, Soi Phaholyothin 32
Phaholyothin Road, Chandrakasem, Jatujak
Bangkok 10900, Thailand
Tel: +662 9415582-3
Fax: +662 9415584
E-mail: info.thailand@belimo.ch

Belimo INDIA**Mumbai Office:**

Belimo Actuators India Pvt. Ltd.
23/ ABCD, Govt. Industrial Estate, Charkop
Kandivali West, Mumbai 400067, India
Tel: +91 22 4025 4800
Fax: +91 22 4025 4899
E-mail: info.india@belimo.ch

Bangalore office:

Belimo Actuators India Pvt. Ltd.
Sreerama Complex, No. 13, 2nd Floor
5th Cross Road, 6th Block, Koramangala
Bangalore – 560097, India
Tel: +91-80-40906311
Fax: +91-80-40906288
E-mail: info.india@belimo.ch

New Delhi Office:

Belimo Actuators India Pvt. Ltd.
Flat No. 515, DLF Tower – B
Jasola Distt. Centre, Jasola
New Delhi 110025, India
Tel: +91 11 41078501
Fax: +91 11 41078508
E-mail: info.india@belimo.ch

Chennai Office:

Belimo Actuators India Pvt. Ltd.
Flat no.3B, Urmilla House
#15, ARK Colony, Eldams Road
Chennai-600 018, India
Tel: +91 44 24355154/5153
E-mail: info.india@belimo.ch

FIRE &
SMOKE



DAMPER



PICCV
EPIV
EV



CCV



BUTTERFLY
VALVE



GLOBE
VALVE



Innovation, Quality and Consultancy:

A partnership for motorising HVAC actuators



5 year warranty



On site around the globe



A complete range of
products from one source



Tested quality



Short delivery
times



Comprehensive
support

Belimo regional head offices

EU BELIMO Automation AG
Brunnenbachstrasse 1
8340 Hinwil, Switzerland
Tel: +41 43 843 61 11
Fax: +41 43 843 62 68
E-mail: info@belimo.ch

AP Belimo Actuators Ltd.
Room 1601-6, 16/F, New Commerce Centre
19 On Sum Street, Shatin, N.T., Hong Kong
Tel: +852 2687 1716
Fax: +852 2687 1795
E-mail: info.asiapacific@belimo.ch

US BELIMO Aircontrol (USA), Inc.
33 Turner Road
Danbury, CT 06810
USA
Tel: +800 543-9038 / 203 791-9915
Fax: +800 228-8283 / 203 791-9919

Or contact your nearest Sales Representative

www.belimo.com

BELIMO®

93010-00170