
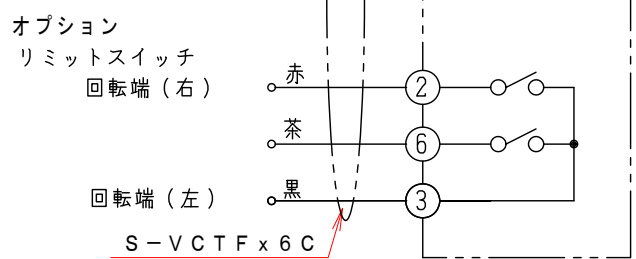


注記
 図中の寸法については現場調査及び機器設計等の進捗にともなって変更することがある。

ロータリーアクチュエーター結線図

MB-1-L-24

電源
 AC/DC-24V

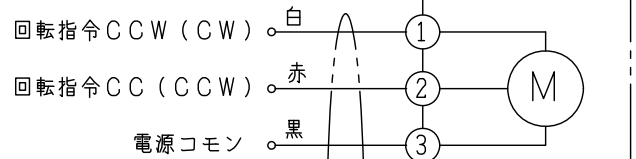

特記

- 板フランジとケーシング接合部の内面は全溶接、外側は点付溶接。
- 内外面仕上げは酸洗いとする。
- 本図ダンパーの使用範囲は下記の通です。

静圧：±2.0KPa以下 風速：2.0m/s以下 温度：-10~60℃以下

- ☆ ロータリーアクチュエーターは仕様により異なります、別途お問い合わせ下さい。
- ☆ 屋内使用清浄空気用です。屋外使用、腐食性ガス等の場合はお問い合わせ下さい。

10	ロータリーアクチュエーター	1	MB-1-L-24
9	カップリング	1	C10670S
8	駆動部取付金具	1	SPCC 2.3t
7	接続金具	2	SPCC 2.3t
6	取付架台	1	SPCC 2.3t
5	フランジ	1	SUS-304 4.0t
4	ドライブッシュ	1	LFZF13-10
3	シャフト	1	SUS-304 φ6.0
2	羽根	1	SUS-304 t=1.5
1	ケーシング	1	50A SUS-304 2.0t
No	部品名称 TITLE	数量 QTY	備考 (規格・寸法) (DIMENSIONS)

回数 REV. MARK	承認 APPROVED BY	検図 CHECKED BY	名称 TITIF
年月日 DATE	設計 DESIGNED BY	製図 DRAWN BY	小径ダンパー 50A
承認 APPROVED BY	設計 DESIGNED BY	製図 DRAWN BY	モーター・ダンパー 50型
変更者 REVISED BY	設計 DESIGNED BY	製図 DRAWN BY	EVDNMF-50AU1
記事 CONTENTS	承認 APPROVED BY	検図 CHECKED BY	図面番号 DRAWING NO.
	承認 APPROVED BY	検図 CHECKED BY	EVDNMF-50AU1
	承認 APPROVED BY	検図 CHECKED BY	変更 REV. MARK
	承認 APPROVED BY	検図 CHECKED BY	01
	承認 APPROVED BY	検図 CHECKED BY	10
	承認 APPROVED BY	検図 CHECKED BY	変更回数
	承認 APPROVED BY	検図 CHECKED BY	00

承認 APPROVED BY
 検図 CHECKED BY
 設計 DESIGNED BY
 製図 DRAWN BY
 武田
 MAY. 29. 2020



保管 REGISTERED

工事番号 JOB No.